


INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA


RNP RWY14(AR)

IWAKUNI APP 128.0 - 236.2	RNP AR RF required.	MATSUYAMA TOWER 118.35 - 126.2	RADAR AVBL ATIS 126.65
------------------------------	------------------------	-----------------------------------	---------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 50°C

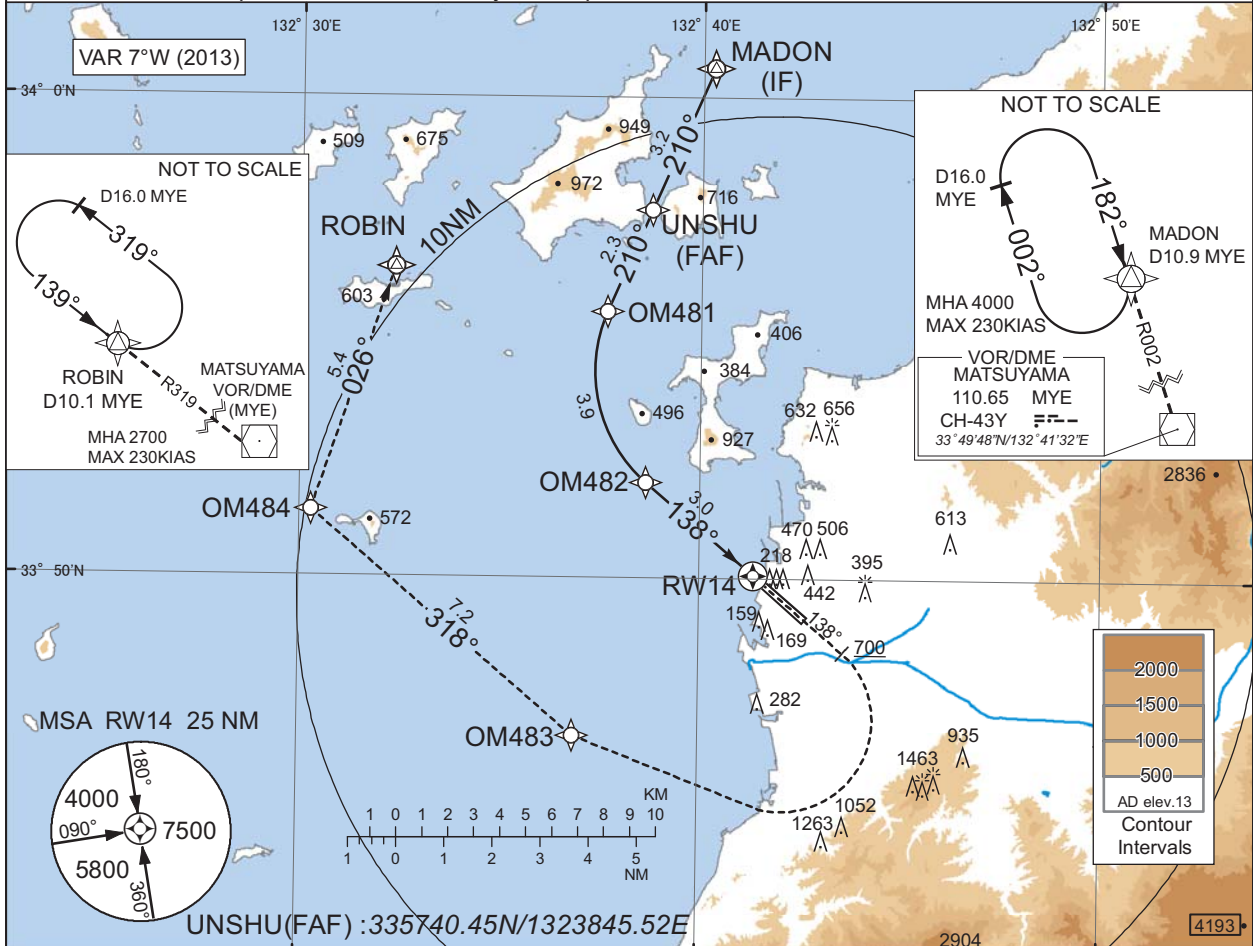

CHANGE : PROC renamed. Requirement for RNP.

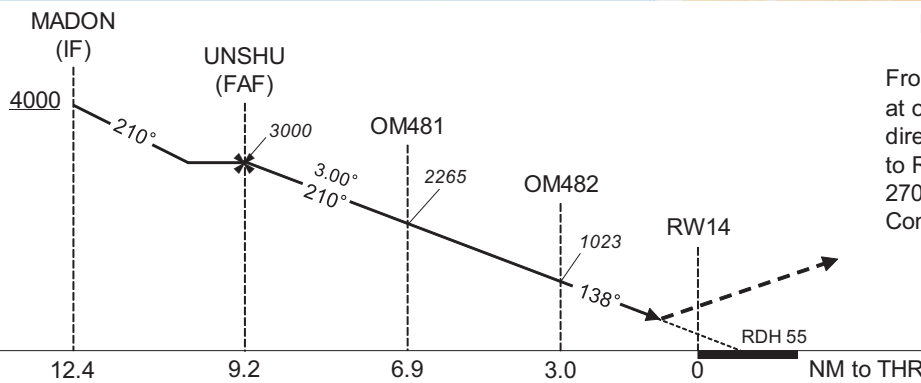

MISSED APPROACH

From RWY14 on track 138°, at or above 700FT turn right, direct to OM483, to OM484, to ROBIN and hold at 2700FT. Contact IWAKUNI APP.

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 25	AD elev. 13
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	505(480)	2000
D	-	-

Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA

RNP RWY14(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MADON	-	-	-7.1	-	-	+4000	-	-	-
002	TF	UNSHU	-	210 (203.3)	-7.1	3.2	-	3000	-	-	1.0
003	TF	OM481	-	210 (203.2)	-7.1	2.3	-	2265	-	-3.00	0.3
004	RF Center: OMRF4 r=3.06NM	OM482	-	-	-7.1	3.9	L	1023	-	-3.00	0.3
005	TF	RW14	Y	138 (130.5)	-7.1	3.0	-	80	-	-3.00/55	0.3
006	FA	-	-	138 (130.5)	-7.1	-	-	+700	-	-	1.0
007	DF	OM483	-	-	-7.1	-	R	-	-	-	1.0
008	TF	OM484	-	318 (310.5)	-7.1	7.2	-	-	-	-	1.0
009	TF	ROBIN	-	026 (018.6)	-7.1	5.4	-	2700	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MADON	340037.92N / 1324017.47E	OMRF4	335420.16N / 1324102.43E
UNSHU	335740.45N / 1323845.52E		
OM481	335533.13N / 1323739.63E		
OM482	335159.96N / 1323839.26E		
RW14	335004.50N / 1324121.73E		
OM483	334643.12N / 1323652.81E		
OM484	335123.09N / 1323018.19E		
ROBIN	335627.62N / 1323221.80E		

CHANGE : PROC renamed.