

STANDARD DEPARTURE CHART - INSTRUMENT


RJBB / KANSAI INTL

RNAV SID

OMGOR ONE DEPARTURE

RNP1

Note GNSS required.

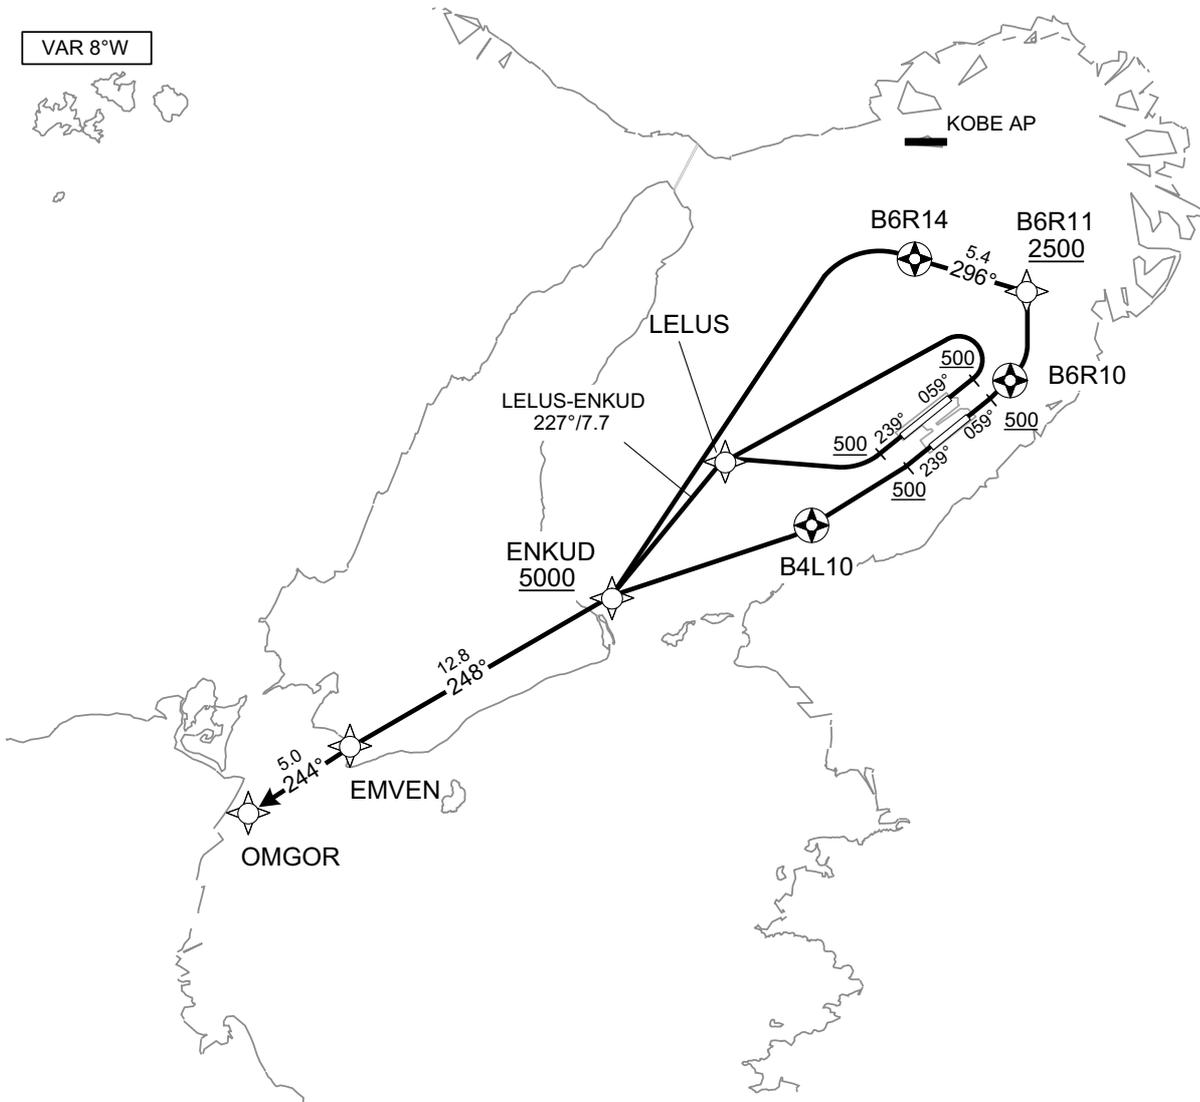

RWY06R : Climb on HDG059° at or above 500FT, direct to B6R10, turn left direct to B6R11 at or above 2500FT, to B6R14, turn left direct to ENKUD at or above 5000FT, to EMVEN, to OMGOR.

RWY06L : Climb on HDG059° at or above 500FT, turn left direct to LELUS, to ENKUD at or above 5000FT, to EMVEN, to OMGOR.

RWY24R : Climb on HDG239° at or above 500FT, turn right direct to LELUS, to ENKUD at or above 5000FT, to EMVEN, to OMGOR.

RWY24L : Climb on HDG239° at or above 500FT, direct to B4L10, direct to ENKUD at or above 5000FT, to EMVEN, to OMGOR.

Note RWY06R/06L/24R/24L : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV SID

OMGOR ONE DEPARTURE

RWY06R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	059 (050.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	B6R10	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	B6R11	—	—	-8.1	—	L	+2500	—	—	RNP1
004	TF	B6R14	Y	296 (287.8)	-8.1	5.4	—	—	—	—	RNP1
005	DF	ENKUD	—	—	-8.1	—	L	+5000	—	—	RNP1
006	TF	EMVEN	—	248 (240.1)	-8.1	12.8	—	—	—	—	RNP1
007	TF	OMGOR	—	244 (235.6)	-8.1	5.0	—	—	—	—	RNP1

RWY06L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	059 (050.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	LELUS	—	—	-8.1	—	L	—	—	—	RNP1
003	TF	ENKUD	—	227 (218.6)	-8.1	7.7	—	+5000	—	—	RNP1
004	TF	EMVEN	—	248 (240.1)	-8.1	12.8	—	—	—	—	RNP1
005	TF	OMGOR	—	244 (235.6)	-8.1	5.0	—	—	—	—	RNP1

RWY24R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	239 (230.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	LELUS	—	—	-8.1	—	R	—	—	—	RNP1
003	TF	ENKUD	—	227 (218.6)	-8.1	7.7	—	+5000	—	—	RNP1
004	TF	EMVEN	—	248 (240.1)	-8.1	12.8	—	—	—	—	RNP1
005	TF	OMGOR	—	244 (235.6)	-8.1	5.0	—	—	—	—	RNP1

RWY24L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	239 (230.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	B4L10	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	ENKUD	—	—	-8.1	—	—	+5000	—	—	RNP1
004	TF	EMVEN	—	248 (240.1)	-8.1	12.8	—	—	—	—	RNP1
005	TF	OMGOR	—	244 (235.6)	-8.1	5.0	—	—	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
B6R10	342759.6N / 1351746.0E	B4L10	342136.9N / 1350734.5E
B6R11	343140.8N / 1351845.1E	ENKUD	341833.8N / 1345719.3E
B6R14	343320.1N / 1351229.1E	EMVEN	341209.7N / 1344353.3E
LELUS	342436.6N / 1350309.3E	OMGOR	340920.3N / 1343854.4E

CHANGE : New PROC.