


AERODROME CHART - ICAO 17°28'01"N 047°07'17"E **ELEV 2382** FRS 133.5
TIBA 122.8 **SHARURAH/Sharurah**
UNCONTROLLED AD

NOTE:
Contact FRS on 133.5 MHZ at least 15 minutes before landing.

RWY	DIRECTION	THR	BEARING STRENGTH
08	083°	17°27'55"N 047°06'15"E	PCN 80/F/A/W/T ASPHALT
26	263°	17°28'06"N 047°08'19"E	


ELEV. ALT IN FEET
DIMENSIONS IN METERS
BRG ARE MAG
ANNUAL RATE OF CHANGE 2' E

TAXIWAY DESIGNATOR	Width	BEARING STRENGTH (PCN)	Surface
TAXIWAY A	23	80/F/A/W/T	ASPHALT
TAXIWAY A1	23	80/F/A/W/T	ASPHALT
TAXIWAY A2	23	80/F/A/W/T	ASPHALT
TAXIWAY A3	23	80/F/A/W/T	ASPHALT
TAXIWAY A4	23	80/F/A/W/T	ASPHALT

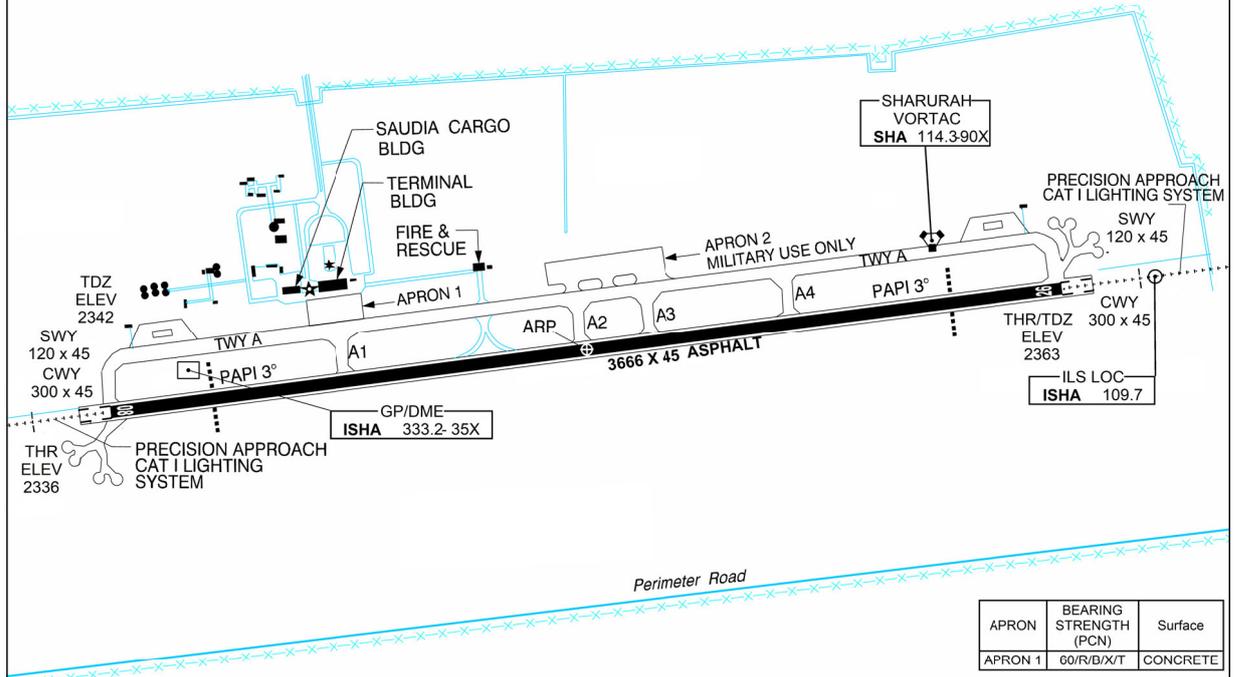

APRON	BEARING STRENGTH (PCN)	Surface
APRON 1	60/R/B/X/T	CONCRETE

NOTES:
APP LIGHTS: CAT I PRECISION RWY 08/26
AD LIGHTS: HI RWY EDGE LIGHTS



CHANGES: RWY length Updated

TAKE-OFF MINIMUMS:
RWY 08/26: 600 FT ceiling and 1600 meters visibility required,
or standard with IFR Departure Procedure.

LEGEND	
SERVICE ROAD	
FENCE	