



WAAS CH 61299 W28A	APP CRS 275°	Rwy Idg 9000 TDZE 998 Apt Elev 1026
--	------------------------	--

RNAV (GPS) Y RWY 28

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.										ALS-F-2		MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.			
D-ATIS		ATLANTA		ATLANTA TOWER						ALL		GND CON		ALL	
ARR 119.65		APP CON		8L-26R		8R-26L		9L-27R		9R-27L		10-28 RWYS		[8L-26R, 8R-26L] (9L-27R, 9R-27L) 10-28 RWYS	
DEP 125.55		127.9 379.9		119.1		125.325		123.85		119.3		119.5 254.4		121.9 121.75 121.65 254.4	

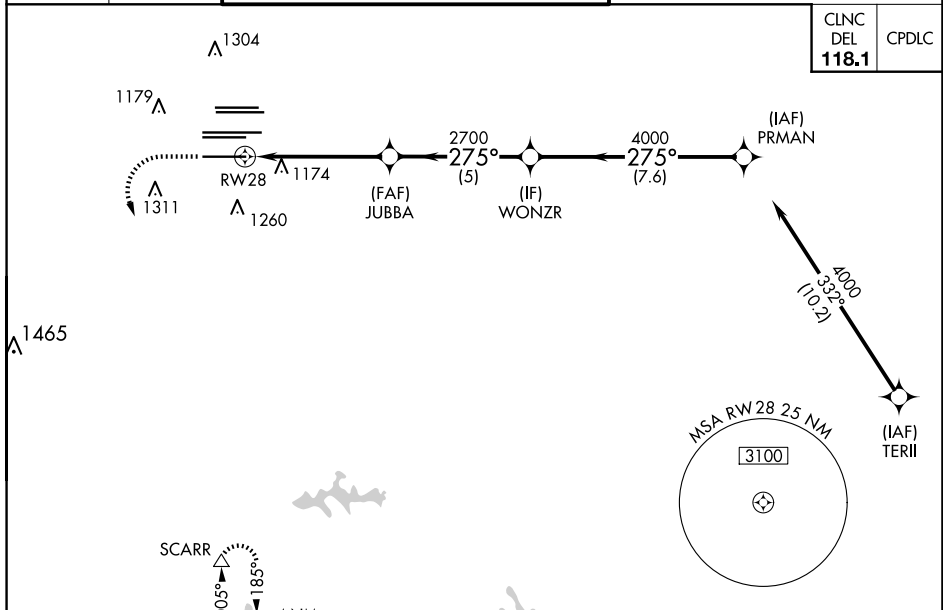

RADAR REQUIRED

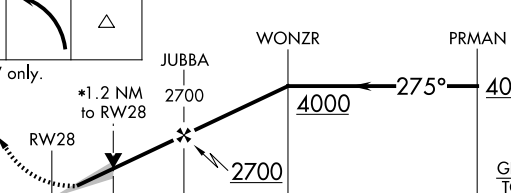1500 ↑	3000 ↗	SCARR △				
*LNAV only.						
CATEGORY	A	B	C	D		
LPV DA	1198/18		200 (200-½)			
LNAV/VNAV DA	1250/24		252 (300-½)			
LNAV MDA	1440/24	442 (500-½)	1440/45	442 (500-¾)		

