

STANDARD DEPARTURE CHART - INSTRUMENT


RJFE / FUKUE

RNAV SID

OLVIN ONE DEPARTURE

RNP1

Note GNSS required.

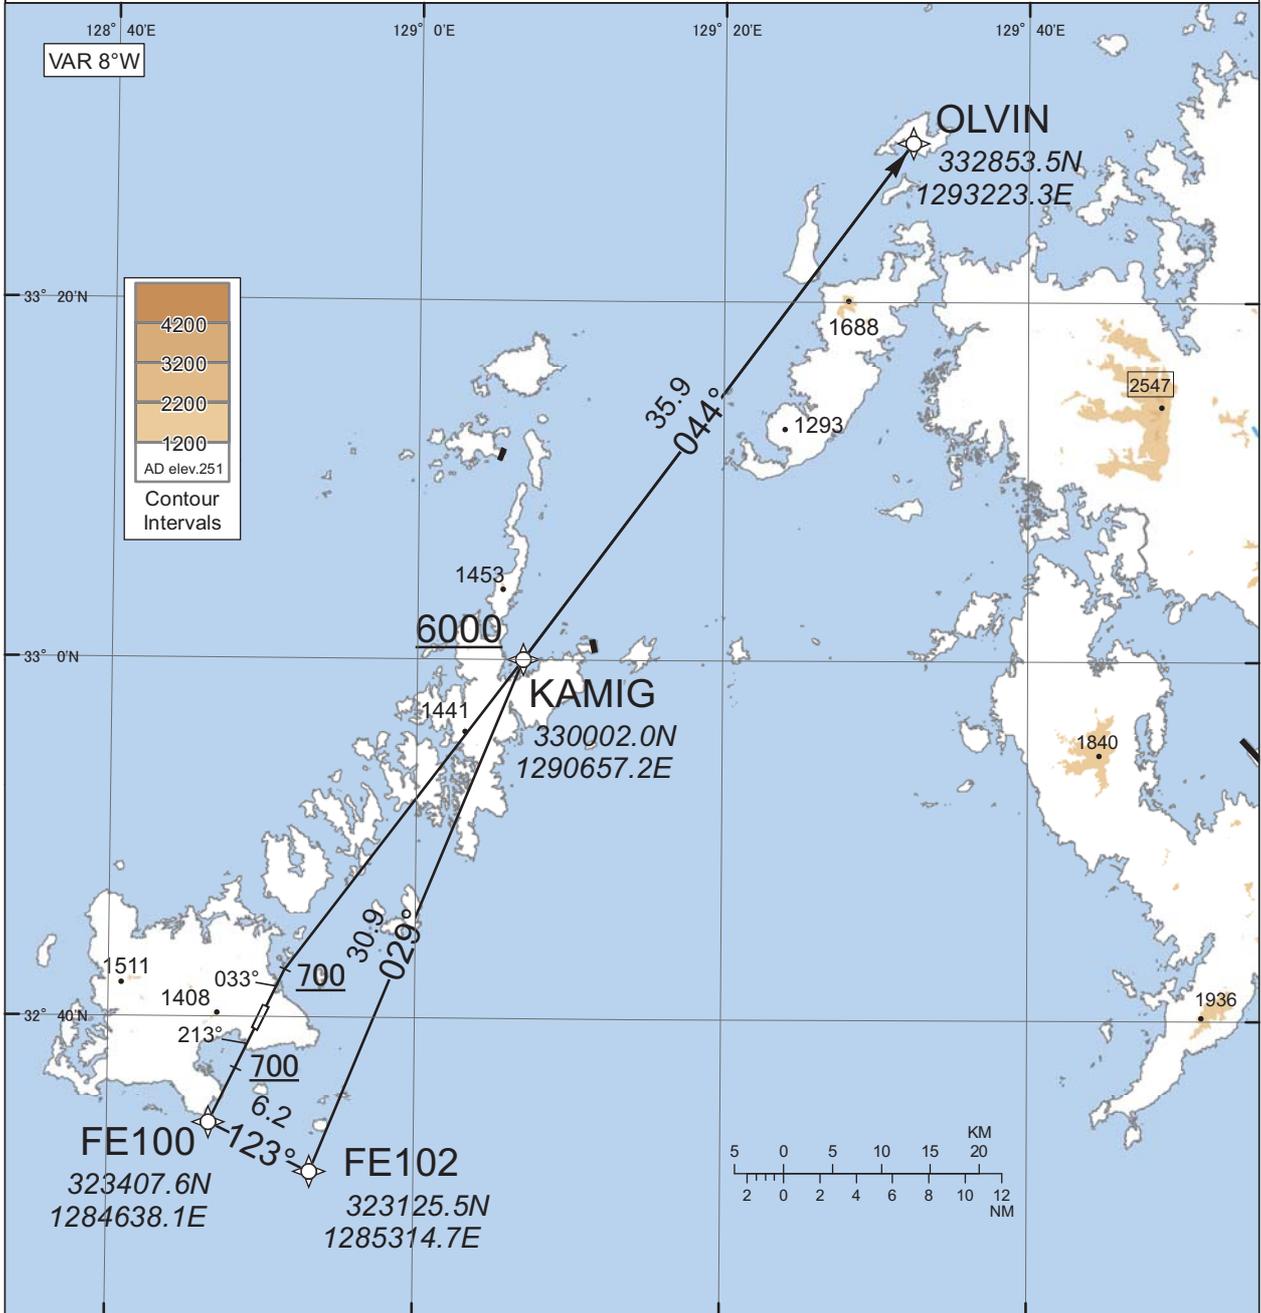

CHANGE : Navigation Specification(Basic RNP1→RNP1).

RWY03 : Climb on HDG033° at or above 700FT, direct to KAMIG at or above 6000FT, to OLVIN.  
 RWY21 : Climb on HDG213° at or above 700FT, direct to FE100, to FE102, to KAMIG  
 at or above 6000FT, to OLVIN.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFE / FUKUE

RNAV SID

OLVIN ONE DEPARTURE

RWY03

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	033 (025.6)	-7.5	-	-	+700	-	-	RNP1
002	DF	KAMIG	-	-	-7.5	-	-	+6000	-	-	RNP1
003	TF	OLVIN	-	044 (036.3)	-7.5	35.9	-	-	-	-	RNP1

RWY21

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	213 (205.7)	-7.5	-	-	+700	-	-	RNP1
002	DF	FE100	-	-	-7.5	-	-	-	-	-	RNP1
003	TF	FE102	-	123 (115.8)	-7.5	6.2	-	-	-	-	RNP1
004	TF	KAMIG	-	029 (021.9)	-7.5	30.9	-	+6000	-	-	RNP1
005	TF	OLVIN	-	044 (036.3)	-7.5	35.9	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).