WAAS	APP CRS	Rwy Idg	10701
CH 40214	224°	TDZE	1077
W22A		Apt Elev	1077

RNAV (GPS) RWY 22R

WILMINGTON AIR PARK (ILN)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1500 then right turn 3000 direct TIGRR and hold.

D-ATIS	COLUMBUS APP CON	WILMINGTON TOWER	GND CON	CLNC DEL
124.925	118.85 269.275	119.475	121.6	128.85

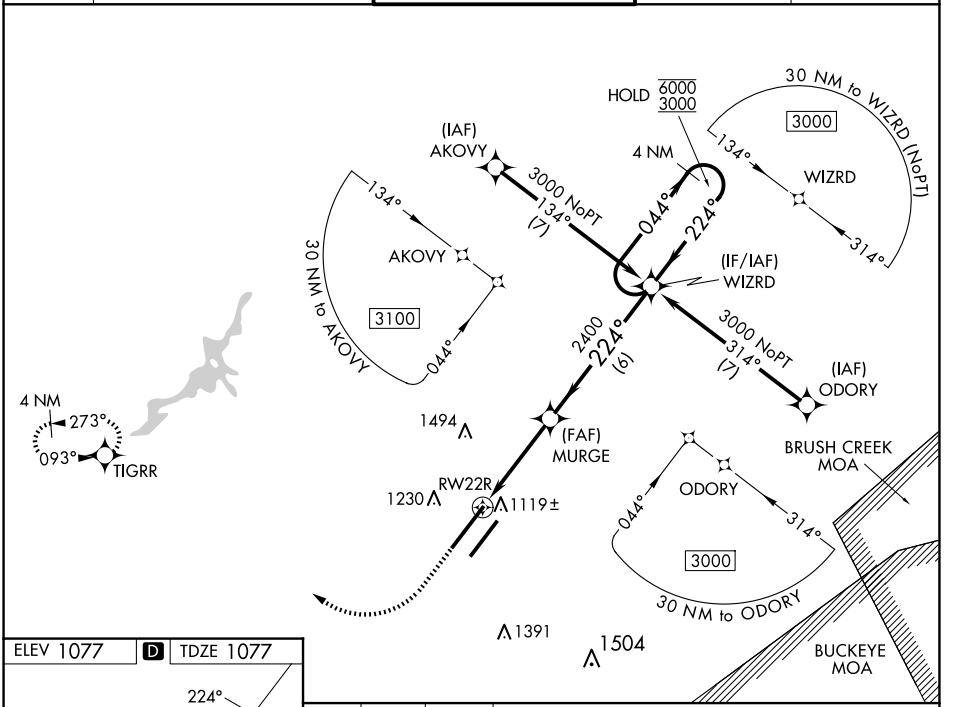

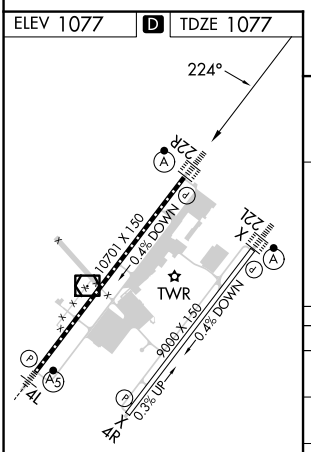

TDZ/CL Rwys 22L and 22R
HIRL Rwys 4L-22R and 4R-22L

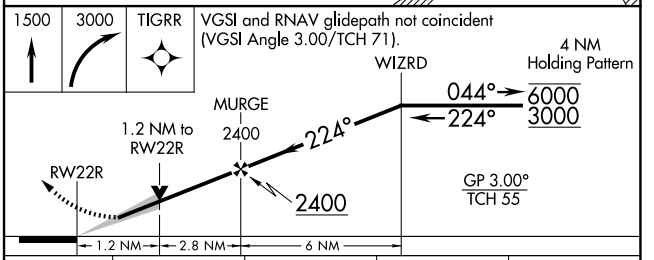

CATEGORY	A	B	C	D
LPV DA	1277/18 200 (200-½)			
LNAV/VNAV DA	1393/24 316 (400-½)			
LNAV MDA	1520/24 443 (500-½)		1520/45 443 (500-⅞)	
C CIRCLING	1560-1 483 (500-1)		1860-2¼ 783 (800-2¼)	1860-2½ 783 (800-2½)

EC-2, 20 MAR 2025 to 17 APR 2025
EC-2, 20 MAR 2025 to 17 APR 2025