

STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO


TRANSITION ALTITUDE
10 000

PULA ATIS
PULA RADAR
PULA TOWER

ROTAR 2Y
KULEN 2X
LABIN 2Y


PULA / Pula (LDPL)
RNAV Rwy 09

CHANGE: LDTR17, LDTS17, LDTR18 and LDTS18 areas withdrawn; New LDTR31 and LDTS31 areas added.

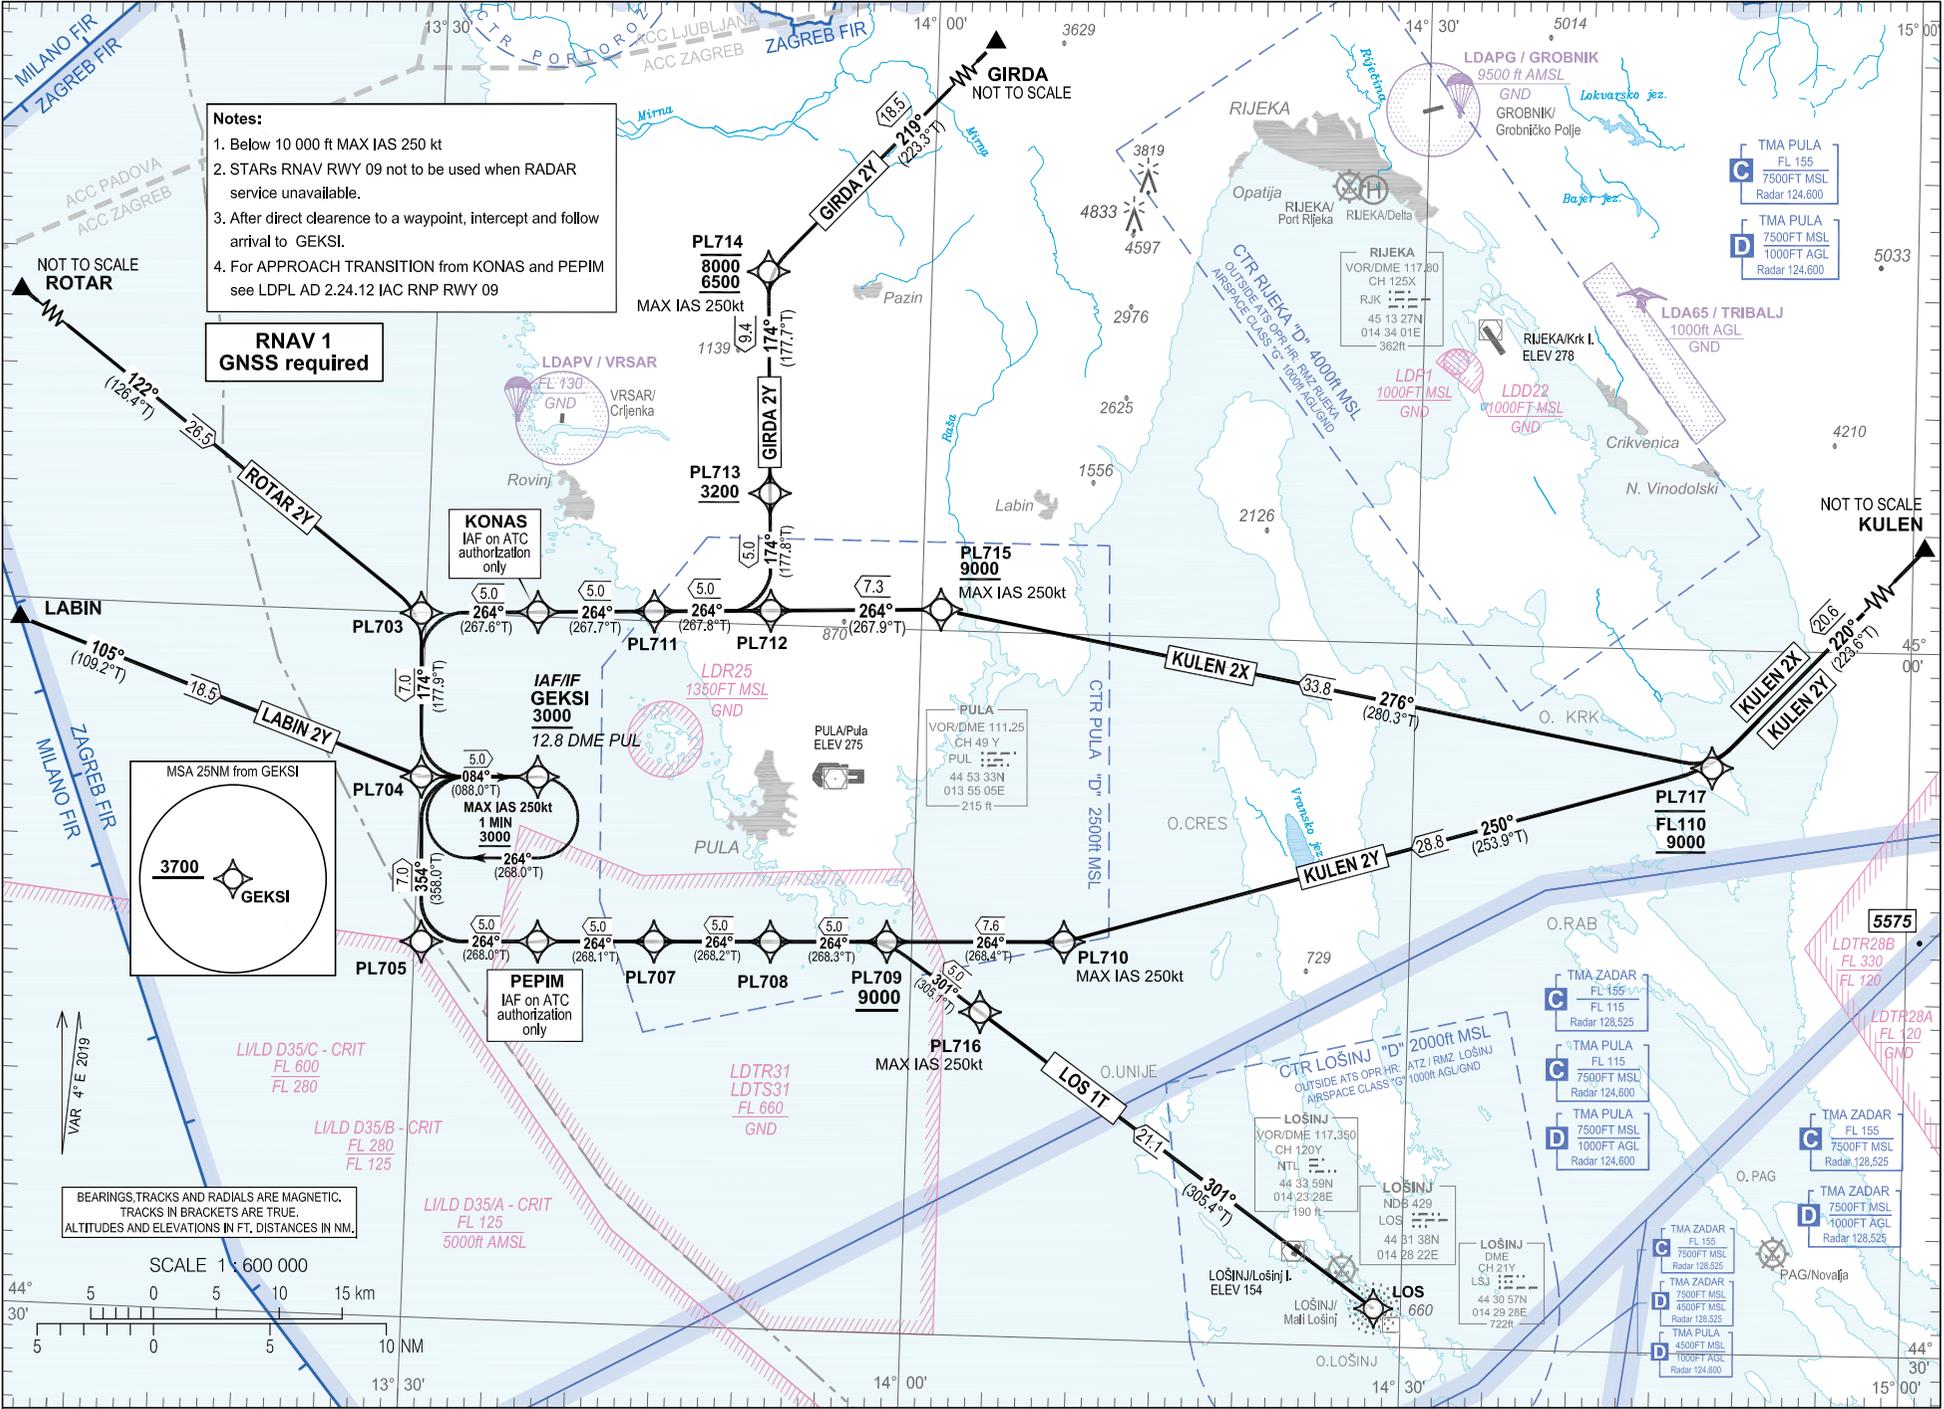

- Notes:**
1. Below 10 000 ft MAX IAS 250 kt
 2. STARs RNAV Rwy 09 not to be used when RADAR service unavailable.
 3. After direct clearance to a waypoint, intercept and follow arrival to GEKSI.
 4. For APPROACH TRANSITION from KONAS and PEPIM see LDPL AD 2.24.12 IAC RNP Rwy 09

RNAV 1 GNSS required



BEARINGS, TRACKS AND RADIALS ARE MAGNETIC.
TRACKS IN BRACKETS ARE TRUE.
ALTITUDES AND ELEVATIONS IN FT, DISTANCES IN NM.

SCALE 1 : 600 000



PULA / Pula (LDPL)

 ROTAR 2Y
 KULEN 2X
 LOS 1T

 GIRDA 2Y
 KULEN 2Y
 LABIN 2Y

RNAV RWY 09

LDPL RNAV STANDARD ARRIVAL RWY 09												
Proposed tabular description for navigation database coding												
Serial number	Route	Path descriptor	Waypoint name	Flyover	Course °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Remarks	NAVC SPEC
010	ROTAR 2Y	IF	ROTAR	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL703	-	122° (126.4°T)	4°E	26.5	-	-	-	-	
030		TF	PL704	-	174° (177.9°T)	4°E	7.0	-	-	-	-	
040		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	
010	GIRDA 2Y	IF	GIRDA	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL714	-	219° (223.3°T)	4°E	18.5	-	-8000 +6500	-250	-	
030		TF	PL713	-	174° (177.7°T)	4°E	9.4	-	+3200	-	-	
040		TF	PL712	-	174° (177.8°T)	4°E	5.0	-	-	-	-	
050		TF	PL711	-	264° (267.8°T)	4°E	5.0	-	-	-	-	
060		TF	KONAS	-	264° (267.7°T)	4°E	5.0	-	-	-	IAF on ATC authorization only	
070		TF	PL703	-	264° (267.6°T)	4°E	5.0	-	-	-	-	
080		TF	PL704	-	174° (177.9°T)	4°E	7.0	-	-	-	-	
090		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	
010	KULEN 2X	IF	KULEN	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL717	-	220° (223.6T)	4°E	20.6	-	-FL110 +9000	-	-	
030		TF	PL715	-	276° (280.3°T)	4°E	33.8	-	+9000	-250	-	
040		TF	PL712	-	264° (267.9°T)	4°E	7.3	-	-	-	-	
050		TF	PL711	-	264° (267.8°T)	4°E	5.0	-	-	-	-	
060		TF	KONAS	-	264° (267.7°T)	4°E	5.0	-	-	-	IAF on ATC authorization only	
070		TF	PL703	-	264° (267.6°T)	4°E	5.0	-	-	-	-	
080		TF	PL704	-	174° (177.9°T)	4°E	7.0	-	-	-	-	
090		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	

CHANGE: LDTR17, LDTS17, LDTR18 and LDTS18 areas withdrawn; New LDTR31 and LDTS31 areas added.

LDPL RNAV STANDARD ARRIVAL RWY 09

Proposed tabular description for navigation database coding

Serial number	Route	Path descriptor	Waypoint name	Flyover	Course °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Remarks	NAV SPEC
010	KULEN 2Y	IF	KULEN	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL717	-	220° (223.6°T)	4°E	20.6	-	-FL110 +9000	-	-	
030		TF	PL710	-	250° (253.9°T)	4°E	28.8	-	-	-250	-	
040		TF	PL709	-	264° (268.4°T)	4°E	7.6	-	+9000	-	-	
050		TF	PL708	-	264° (268.3°T)	4°E	5.0	-	-	-	-	
060		TF	PL707	-	264° (268.2°T)	4°E	5.0	-	-	-	-	
070		TF	PEPIM	-	264° (268.1°T)	4°E	5.0	-	-	-	IAF on ATC authorization only	
080		TF	PL705	-	264° (268.0°T)	4°E	5.0	-	-	-	-	
090		TF	PL704	-	354° (358.0°T)	4°E	7.0	-	-	-	-	
100		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	
010	LOS 1T	IF	LOS	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL716	-	301° (305.4°T)	4°E	21.1	-	-	-250	-	
030		TF	PL709	-	301° (305.1°T)	4°E	5.0	-	+9000	-	-	
040		TF	PL708	-	264° (268.3°T)	4°E	5.0	-	-	-	-	
050		TF	PL707	-	264° (268.2°T)	4°E	5.0	-	-	-	-	
060		TF	PEPIM	-	264° (268.1°T)	4°E	5.0	-	-	-	IAF on ATC authorization only	
070		TF	PL705	-	264° (268.0°T)	4°E	5.0	-	-	-	-	
080		TF	PL704	-	354° (358.0°T)	4°E	7.0	-	-	-	-	
090		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	
010	LABIN 2Y	IF	LABIN	-	-	4°E	-	-	-	-	-	RNAV 1
020		TF	PL704	-	105° (109.2°T)	4°E	18.5	-	-	-	-	
030		TF	GEKSI	-	084° (088.0°T)	4°E	5.0	-	+3000	-	IAF/IF	

IAF on ATC authorization only; For APPROACH TRANSITION from KONAS and PEPIM see LDPL AD 2.24.12 IAC RNP RWY 09

CHANGE: LDTR17, LDTS17, LDTR18 and LDTS18 areas withdrawn; New LDTR31 and LDTS31 areas added.

PULA / Pula (LDPL)

ROTAR 2Y GIRDA 2Y
 KULEN 2X KULEN 2Y
 LOS 1T LABIN 2Y

RNAV RWY 09

RNAV HOLDING tabular description

Waypoint name	Path descriptor	Inbound course °M (°T)	Leg time/ distance (NM)	Turn direction	Minimum altitude (ft)	Maximum altitude (ft)	Speed limit MAX IAS (kt)	Magnetic variation	Remarks	NAV SPEC
GEKSI	HM	084° (088.0°T)	1MIN / -	R	3000	-	250	4°E	-	RNAV 1

Waypoint name	WGS-84 latitude	WGS-84 longitude
LOS	443137.55N	0142822.25E
GEKSI	445311.7N	0133706.9E
GIRDA	452832N	0140802E
KONAS	450012.5N	0133646.7E
KULEN	450955N	0150801E
LABIN	445909N	0130529E
PEPIM	444611.0N	0133727.0E
ROTAR	451546N	0125944E
PL703	445959.6N	0132943.5E
PL704	445301.3N	0133005.4E
PL705	444600.4N	0133026.3E
PL707	444621.1N	0134427.7E
PL708	444630.8N	0135128.5E
PL709	444640.0N	0135829.4E
PL710	444653.3N	0140910.3E
PL711	450024.8N	0134349.0E
PL712	450036.8N	0135051.4E
PL713	450536.5N	0135034.9E
PL714	451502.4N	0135003.4E
PL715	450053.5N	0140109.6E
PL716	444347.8N	0140414.0E
PL717	445458.9N	0144802.5E

CHANGE: LDTR17, LDTS17, LDTR18 and LDTS18 areas withdrawn; New LDTR31 and LDTS31 areas added.