

JACKSONVILLE, FLORIDA

# RNAV (GPS) Z RWY 28

WAAS CH <b>46924</b> W28A	APCH CRS <b>276°</b>	Rwy ldg TDZE Arpt Elev	<b>9003</b> <b>13</b> <b>23</b>
---------------------------------	-------------------------	------------------------------	---------------------------------------

-(USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP APCH


V \* When ALS inop, increase CAT BCD to 7/8 mile.  
 \*\* When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.



MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

ATIS <b>124.35 290.425</b>	APP CON/DEP CON <b>127.775 377.075</b>	TOWER <b>125.15 (CTAF) 340.2</b>	GND CON <b>128.6 336.4</b>	CLNC DEL <b>134.775 0 353.675</b>	ASR/PAR
-------------------------------	---	-------------------------------------	-------------------------------	--------------------------------------	---------



For uncompensated BARO-VNAV systems, Procedure NA below -15°C (5°F) and above 54°C (130°F).

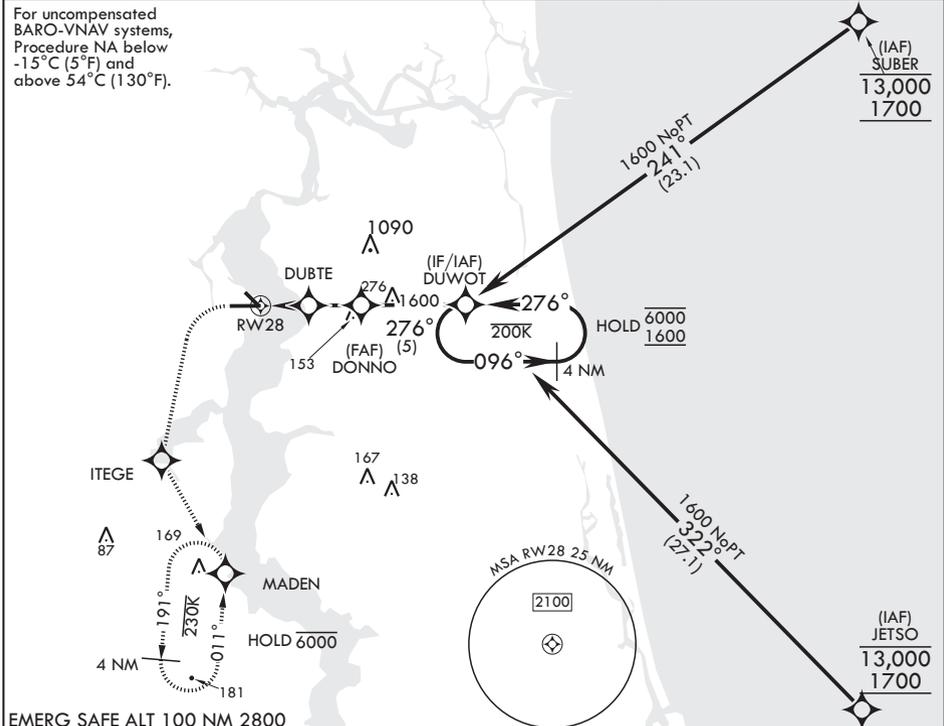

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025

600	2000	ITEGE	ELEV 23	TDZE 13
-----	------	-------	---------	---------

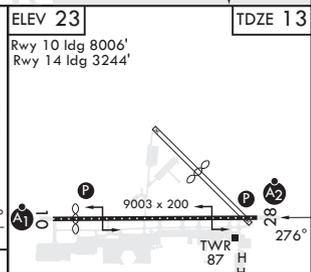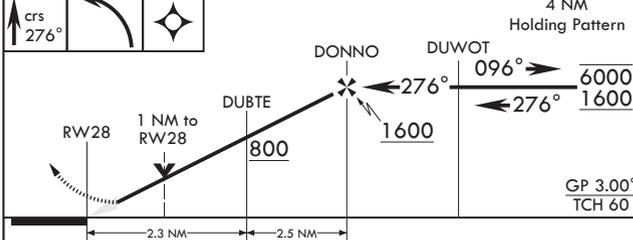

CATEGORY	A		B		C		D	
LPV DA	213-3/4		200		(200-3/4)			
LNAV/VNAV DA*	263-3/4	274-3/4	282-3/4	293-3/4	250 (300-3/4)	261 (300-3/4)	269 (300-3/4)	280 (300-3/4)
LNAV MDA**	400-3/4	387 (400-3/4)	400-1/8	387 (400-3/4)				
<b>C</b> CIRCLING	500-1	477 (500-1)	560-1 1/2	780-2 1/2	537 (600-1 1/2)	757 (800-2 1/2)	HIRL Rwy 10-28	

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amdt 1 03NOV22

# RNAV (GPS) Z RWY 28