


LOC/DME I-TBN <u>110.9</u> Chan 46	APP CRS 147°	Rwy Idg 5535 TDZE 1158 Apt Elev 1160
--	------------------------	---

ILS or LOC RWY 15

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)

- | | | | |
|--|--|--|---|
| | <p>Circling NA west of Rwy 15-33. For inop ALS increase S-LOC 15 Cats C/D visibility to 1/8 SM. When local altimeter setting not received, use Rolla Nil altimeter setting and increase DA to 1427 feet; and all MDAs 80 feet, increase S-LOC 15 Cat C/D and Circling Cat C visibility 1/8 SM and WOKVI fix minimums S-LOC 15 Cat C/D and Circling Cat C visibility 1/8 SM. VDP NA when using Rolla Nil altimeter setting. For inop ALS when using Rolla Nil altimeter setting increase S-LOC 15 WOKVI fix minimums Cats C/D visibility to 1/8 SM. Inop table does not apply to S-ILS 15, S-LOC 15 Cat A/B, and WOKVI fix minimums S-LOC 15.</p> | | <p>MALSR
MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 on heading 298° and TBN VOR R-327 to PIMEW INT/I-TBN 13 DME and hold.</p> |
|--|--|--|---|

D-ATIS 118.7 229.4	KANSAS CITY CENTER 128.35 284.675	FORNEY TOWER★ 125.4 (CTAF) 0 268.7	GND CON 123.75 256.8
-----------------------	--------------------------------------	---------------------------------------	-------------------------

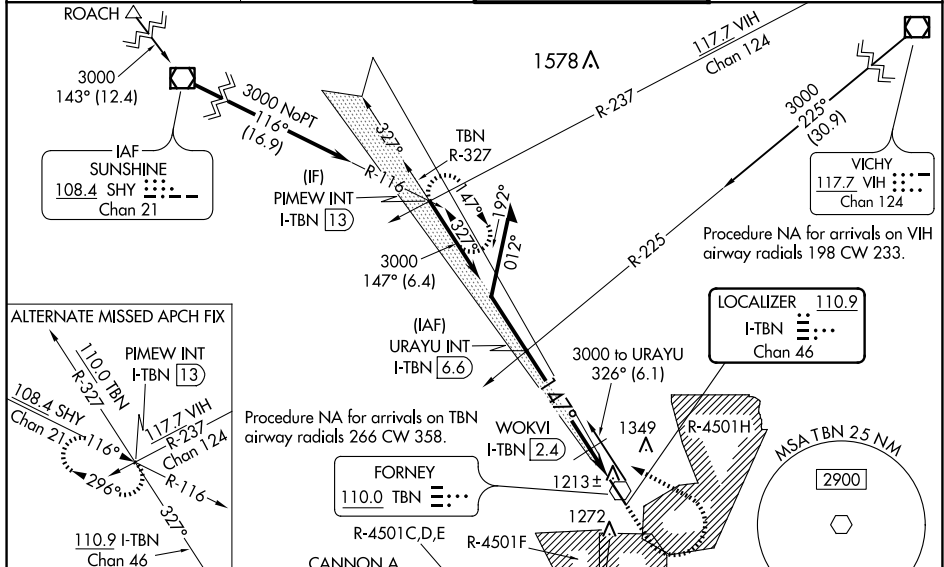

ELEV 1160 **TDZE 1158**

REIL Rwy 15 and 33
HIRL Rwy 15-33

#1740 when using Rolla Ntl
allimeter setting.

Remain
within 10 NM

URAYU INT
I-TBN 6.6

WOKVI
I-TBN 2.4

*I-TBN 1.9

I-TBN 1

GS 3.00°
TCH 47

TWR
1250

1271

FAF to MAP 5.6 NM

CATEGORY	A	B	C	D
S-ILS 15		1358-1	200 (200-1)	
S-LOC 15		1660-1	502 (500-1)	
CIRCLING	1660-1	500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)

WOKVI FIX MINIMUMS

S-LOC 15	1500-1	342 (400-1)
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)
	1660-1½ 500 (500-1½)	1720-2 560 (600-2)