

ATC SURVEILLANCE MINIMUM ALTITUDE CHART - ICAO

AD ELEV TRANSITION ALT 6000

APP Padova Radar 118.900 (134.750)

VENEZIA/Tessera (LIPZ)


BEARINGS ARE MAGNETIC VAR 3°E (JAN 2020)

CHART ONLY TO BE USED FOR CROSS-CHECKING OF ALT/FL ASSIGNED BY PADOVA RADAR

ALTITUDES AND ELEVATIONS ARE IN FEET

IN CASE OF COM FAILURE SET TRANSPONDER CODE 7600

MINIMUM LEVELS/ALTITUDES ASSIGNED BY ATC INCLUDE A CORRECTION FOR LOW TEMPERATURE EFFECT

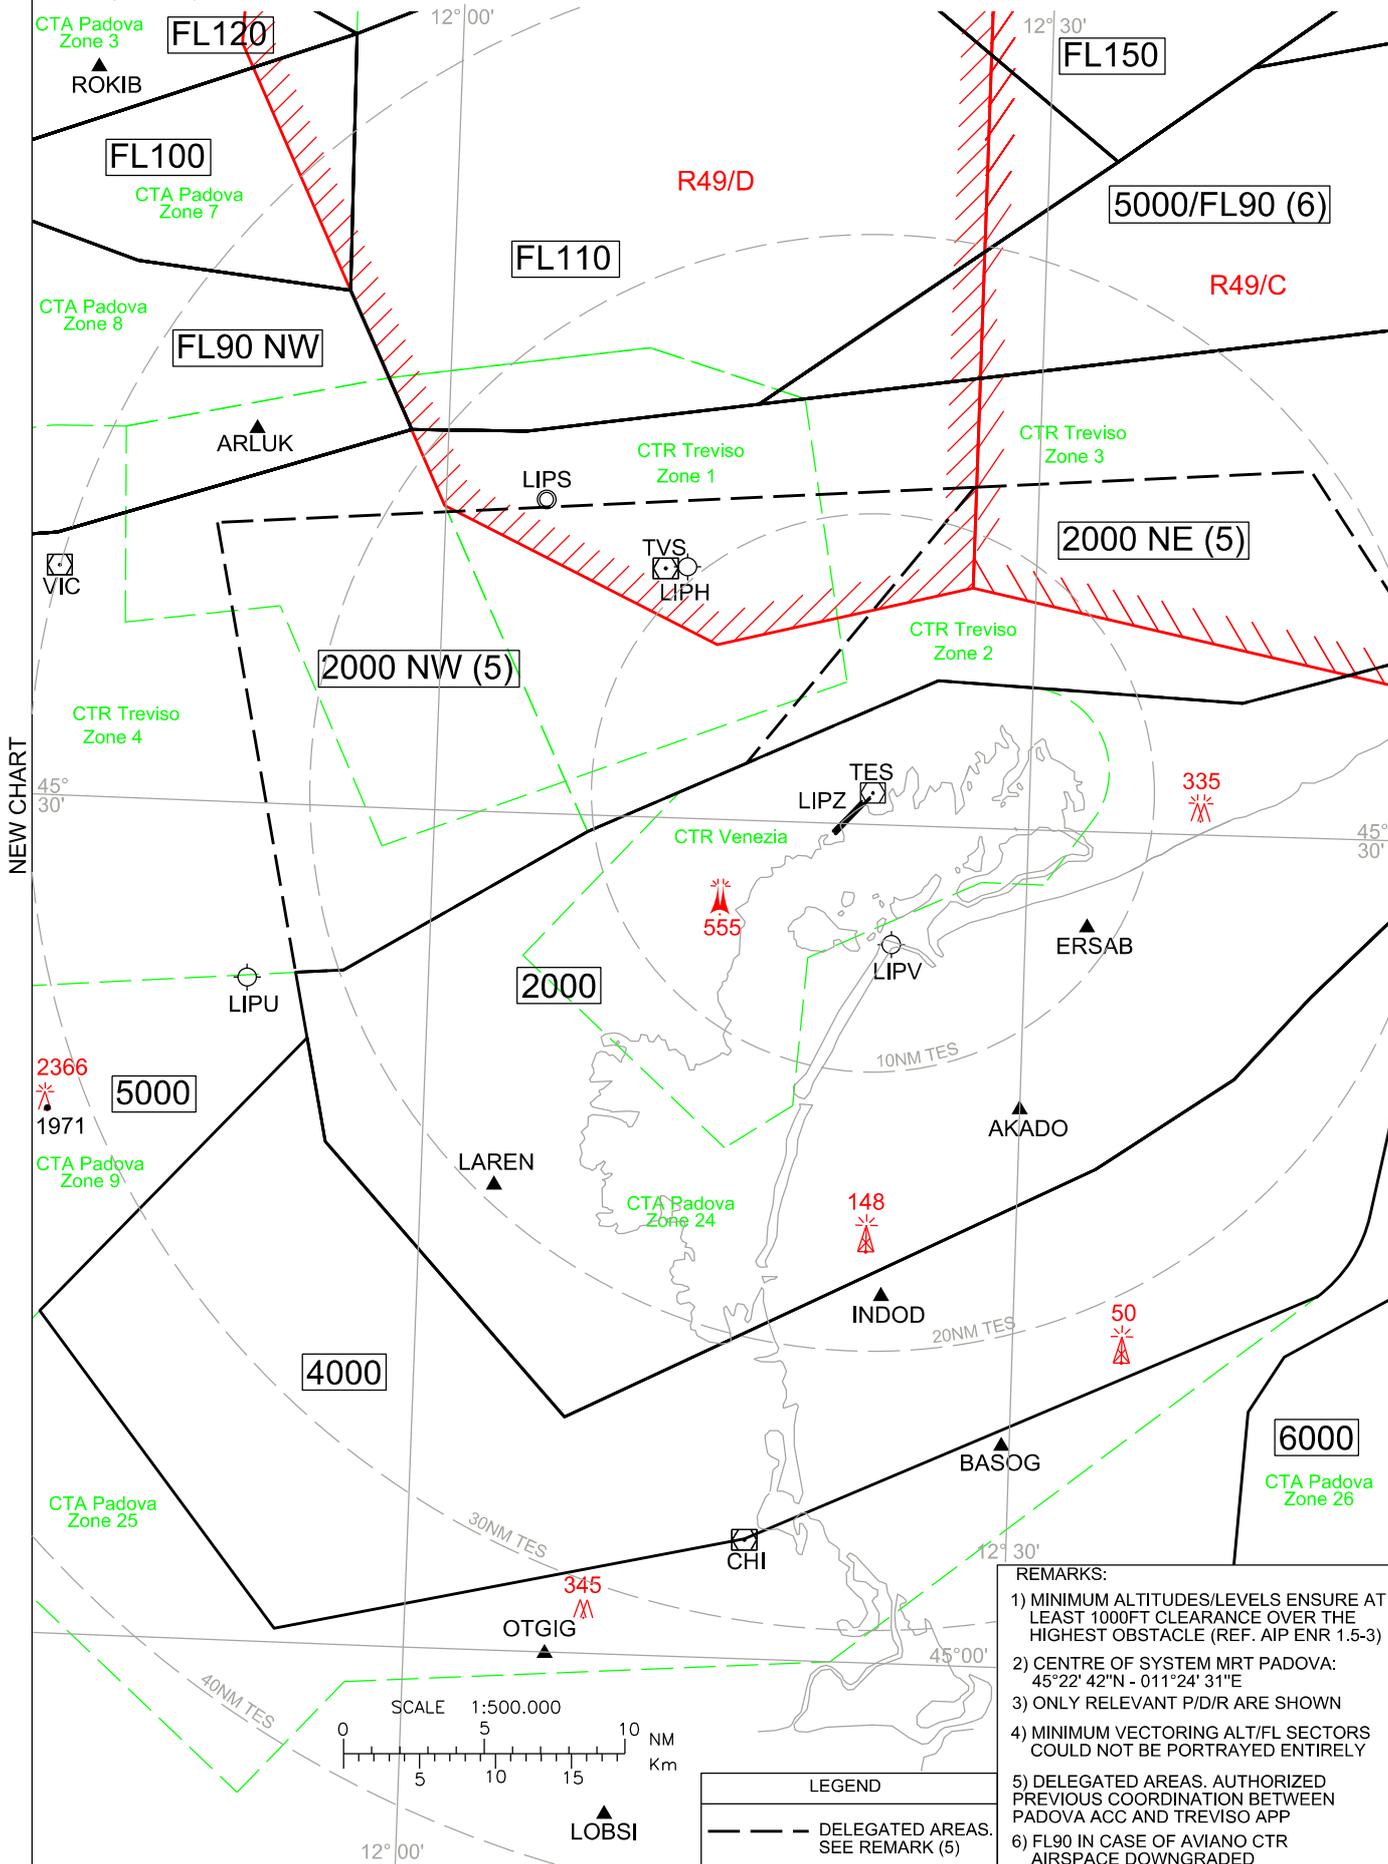

- REMARKS:
- 1) MINIMUM ALTITUDES/LEVELS ENSURE AT LEAST 1000FT CLEARANCE OVER THE HIGHEST OBSTACLE (REF. AIP ENR 1.5-3)
 - 2) CENTRE OF SYSTEM MRT PADOVA: 45°22' 42"N - 011°24' 31"E
 - 3) ONLY RELEVANT P/D/R ARE SHOWN
 - 4) MINIMUM VECTORING ALT/FL SECTORS COULD NOT BE PORTRAYED ENTIRELY
 - 5) DELEGATED AREAS. AUTHORIZED PREVIOUS COORDINATION BETWEEN PADOVA ACC AND TREVISO APP
 - 6) FL90 IN CASE OF AVIANO CTR AIRSPACE DOWNGRADED

LEGEND	
	DELEGATED AREAS. SEE REMARK (5)