


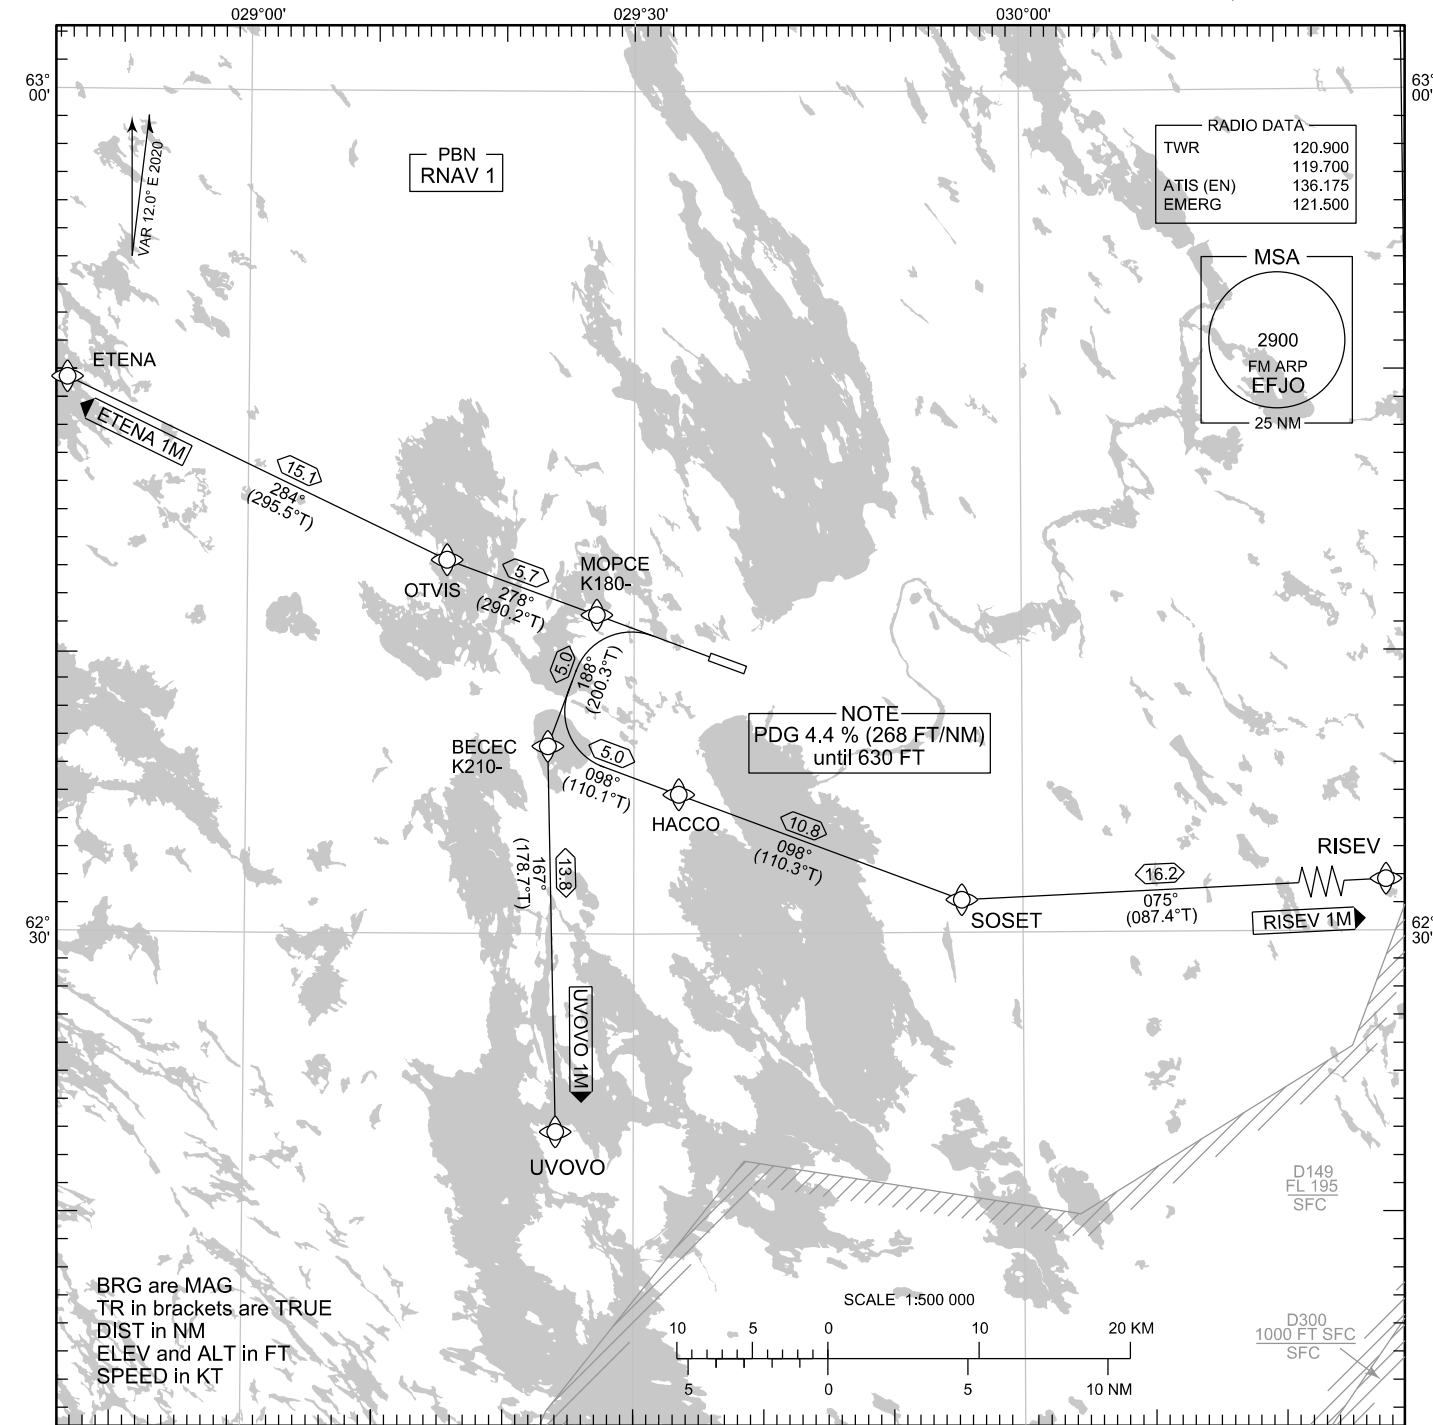

RNAV SID RWY 28

ETENA 1M RISEV 1M UVOVO 1M

DME/DME OPS:	NOT SUPPORTED
ROUTES:	RNAV PROC CODING ON THE VERSO OF THE CHART
SQUAWK:	WHEN LINING UP SQUAWK THE ASSIGNED CODE
INITIAL CLIMB:	MNM TURNING ALTITUDE ACCORDING TO RTE CODING. PDG 4.4 % (268 FT/NM) UNTIL 630 FT. CLOSE-IN OBSTACLES EXIST, SEE EFJO AD 2.10 - 5
NOISE ABATEMENT:	AFTER TAKE-OFF CLIMB AS RAPIDLY AS PRACTICABLE TO AT LEAST 2000 FT ABOVE AD ELEV PUBLISHED SID ROUTES ARE ALSO MINIMUM NOISE ROUTINGS
AREA MNM ALT:	SEE AMA INDEX, AIP ENR 6.1 - 3

EFJO RNAV SID RWY 28										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Flyover					LVL	Speed
ETENA 1M RNAV 1	010	CA	-	-	278°	290.0°T	-		A870+	
	020	DF	MOPCE	-	-	-	-			K180-
	030	TF	OTVIS	-	278°	290.2°T	5.7			
	040	TF	ETENA	-	284°	295.5°T	15.1			
RISEV 1M RNAV 1	010	CA	-	-	278°	290.0°T	-		A870+	
	020	DF	MOPCE	-	-	-	-			K180-
	030	TF	BECEC	-	188°	200.3°T	5.0	L		K210-
	040	TF	HACCO	-	098°	110.1°T	5.0			
	050	TF	SOSET	-	098°	110.3°T	10.8			
	060	TF	RISEV	-	075°	087.4°T	16.2			
UOVOVO 1M RNAV 1	010	CA	-	-	278°	290.0°T	-		A870+	
	020	DF	MOPCE	-	-	-	-			K180-
	030	TF	BECEC	-	188°	200.3°T	5.0			K210-
	040	TF	UOVOVO	-	167°	178.7°T	13.8			
WPT COORD										
SEE PAGE EFJO AD 2.15 - 1										