RNAV (RNP) Y RWY 19

JACKSON HOLE (JAC)

APP CRS	Rwy Idg	6300
187°	TDZE	6451
	Apt Elev	6451

RNP AR APCH-GPS.

T -22°C For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾ SM.

MALS A4

MISSED APPROACH: Climb to 14000 on track 187° to ZEKUG and on track 194° to KICNE and hold, continue climb-in-hold to 14000.
*Missed approach requires minimum climb of 226 feet per NM to 11400.
#Missed approach requires minimum climb of 210 feet per NM to 11600.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER*	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) L	124.55	122.95

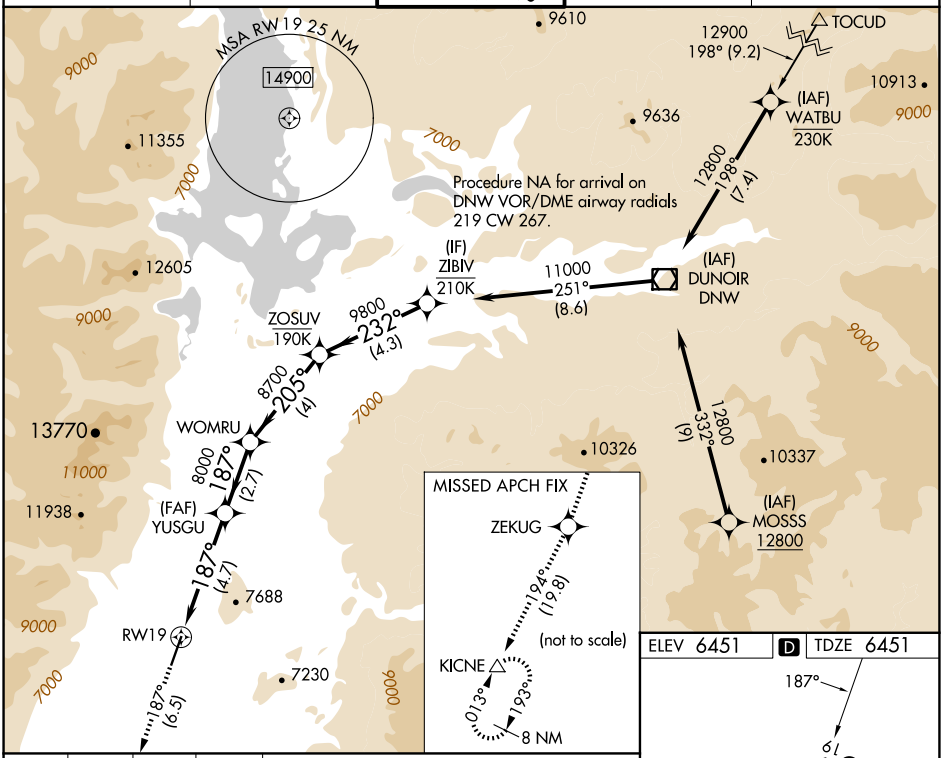

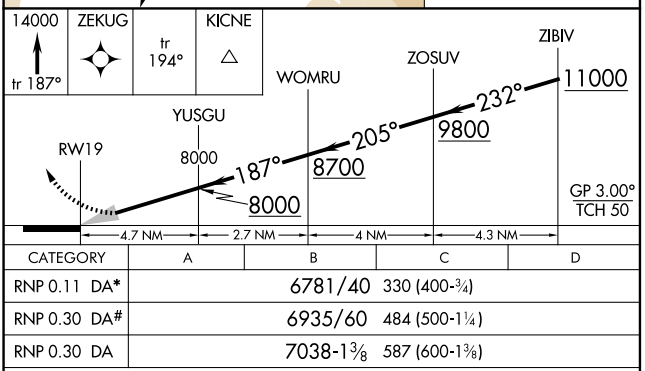

CATEGORY	A	B	C	D
RNP 0.11 DA*	6781/40	330 (400-¾)		
RNP 0.30 DA#	6935/60	484 (500-1¼)		
RNP 0.30 DA	7038-1⅜	587 (600-1⅜)		

AUTHORIZATION REQUIRED

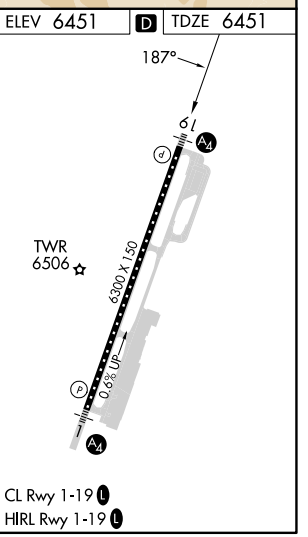

NW-1, 20 MAR 2025 to 17 APR 2025
NW-1, 20 MAR 2025 to 17 APR 2025