

AERODROME CHART




TWR 118.65(130.0)

ZWTN HETIAN/Kungang

N37°02.4'E079°51.7' ELEV 1447.0m


RWY	Direction	Bearing strength
11L	108°	PCR 710/R/B/W/T: RWY11L/29R CONC PCR 1170/R/B/W/T: TWY B1, B5 PCR 1150/R/B/W/T: TWY B4 PCR 710/R/B/W/T: TWY A, A2-A6, B, C1 PCR 900/R/B/W/T: Stands Nr.01, 05-07 PCR 870/R/B/W/T: Stands Nr.02-04, 16
29R	288°	

BEARINGS ARE MAGNETIC.
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS.

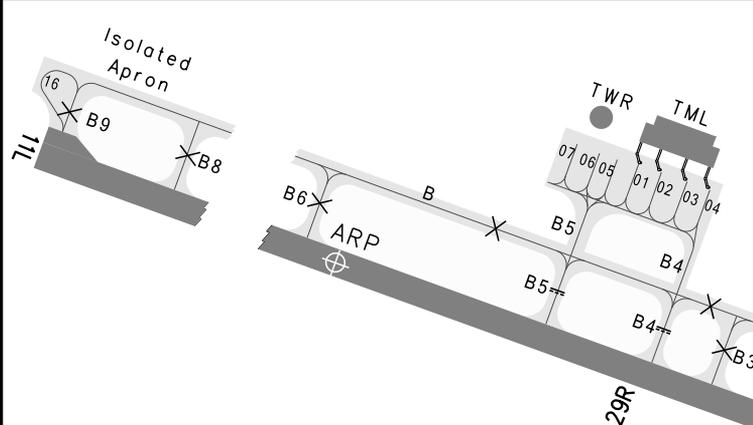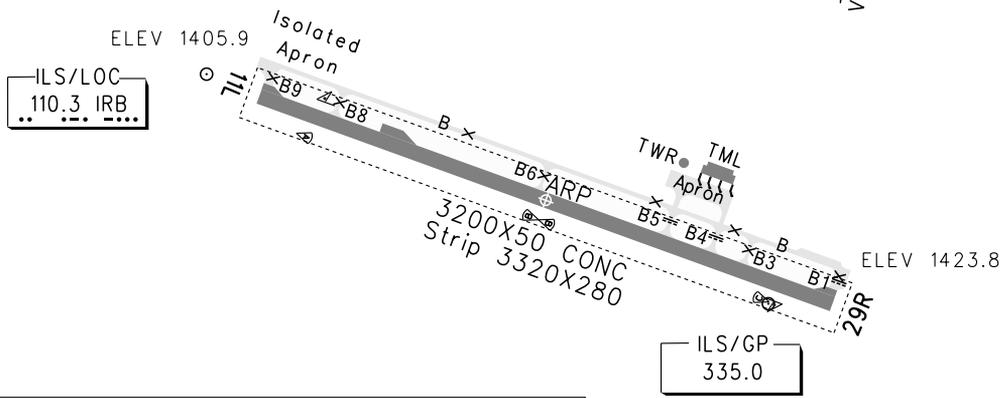

Note:

1. TWYs B6, B8, B9 and B(BTN B1-B4 & B5-B9) are not available.

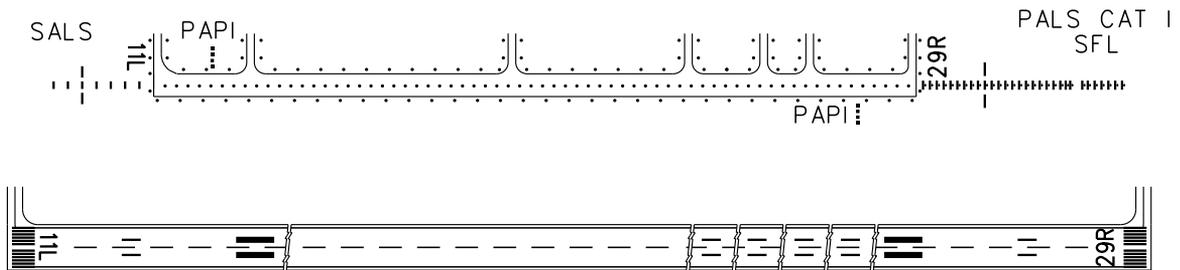

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type	RWY11L		RWY29R		RWY11L	RWY29R
	REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A				SALS PAPI REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B	RVR400	RVR500	RVR400		
	C	VIS800	VIS800	VIS800		
	D					
Other 1&2 ENG	RVR/VIS1600					

Note: ceiling not less than 100m, RVR/VIS 1600 for one engine aircraft.

Changes: PCR.