

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU

RNAV SID and TRANSITION

<p>NEORI TWO DEPARTURE MEKAX TRANSITION</p>	<p>RNP1</p>
<p>Note GNSS required.</p>	
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin-bottom: 10px;"> <p>VAR 6° W</p> </div>	
<p><u>NEORI TWO DEPARTURE</u>  RWY04: Climb on HDG040° at or above 500FT, turn left direct to NEORI.  RWY22: Climb on HDG220° at or above 600FT, turn left direct to NEORI.  Note RWY22 : 5.0% climb gradient required up to 600FT.  OBST ALT 145FT located at 0.2NM 257° FM end of RWY22.</p>	
<p><u>MEKAX TRANSITION</u>  From NEORI to MEKAX.</p>	

CHANGE : PROC name added. MEKAX TRANSITION added.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU

RNAV SID and TRANSITION

NEORI TWO DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	040 (034.0)	-6.2	-	-	+500	-	-	RNP1
002	DF	NEORI	-	-	-6.2	-	L	-	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	220 (214.0)	-6.2	-	-	+600	-	-	RNP1
002	DF	NEORI	-	-	-6.2	-	L	-	-	-	RNP1

MEKAX TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NEORI	-	-	-6.2	-	-	-	-	-	RNP1
002	TF	MEKAX	-	027 (021.0)	-6.2	35.2	-	-	-	-	RNP1

CHANGE : PROC name added. NEORI TWO DEPARTURE added. True bearing. VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU


RNAV SID and TRANSITION

AZEFU FOUR DEPARTURE  
INOBE TRANSITION

RNP1

Note GNSS required.

VAR 6° W

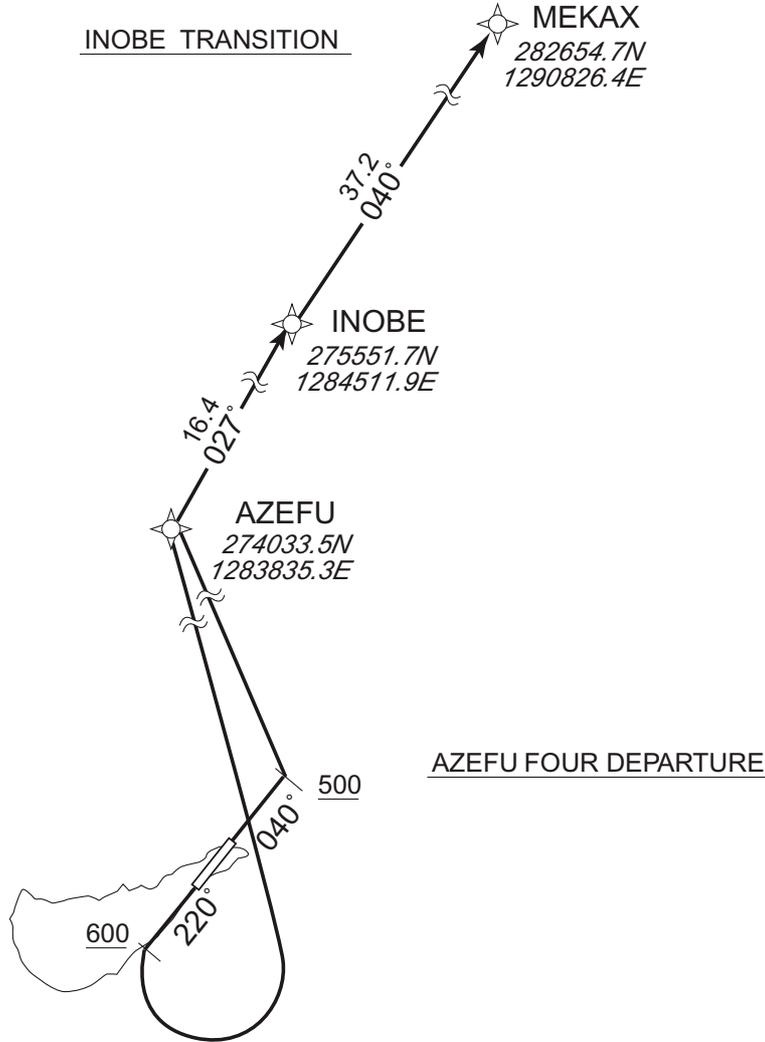

AZEFU FOUR DEPARTURE

RWY04: Climb on HDG040° at or above 500FT, turn left direct to AZEFU, to INOBE.

RWY22: Climb on HDG220° at or above 600FT, turn left direct to AZEFU, to INOBE.

Note RWY22 : 5.0% climb gradient required up to 600FT.

OBST ALT 145FT located at 0.2NM 257° FM end of RWY22.

INOBE TRANSITION

From INOBE to MEKAX.

CHANGE : PROC name added. INOBE TRANSITION added. SID renamed(AZEFU FOUR DEPARTURE).  
Course FM INOBE to MEKAX. ALT restriction at AZEFU deleted.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU

RNAV SID and TRANSITION

AZEFU FOUR DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	040 (034.0)	-6.2	—	—	+500	—	—	RNP1
002	DF	AZEFU	—	—	-6.2	—	L	—	—	—	RNP1
003	TF	INOBE	—	027 (020.9)	-6.2	16.4	—	—	—	—	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	220 (214.0)	-6.2	—	—	+600	—	—	RNP1
002	DF	AZEFU	—	—	-6.2	—	L	—	—	—	RNP1
003	TF	INOBE	—	027 (020.9)	-6.2	16.4	—	—	—	—	RNP1

INOBE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	INOBE	—	—	-6.2	—	—	—	—	—	RNP1
002	TF	MEKAX	—	040 (033.3)	-6.2	37.2	—	—	—	—	RNP1

CHANGE : PROC name added. AZEFU FOUR DEPARTURE added. VAR. True bearing. ALT restriction at AZEFU deleted.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU


RNAV SID and TRANSITION

SONNA TWO DEPARTURE  
YUWAN TRANSITION

RNP1

Note GNSS required.

VAR 6° W

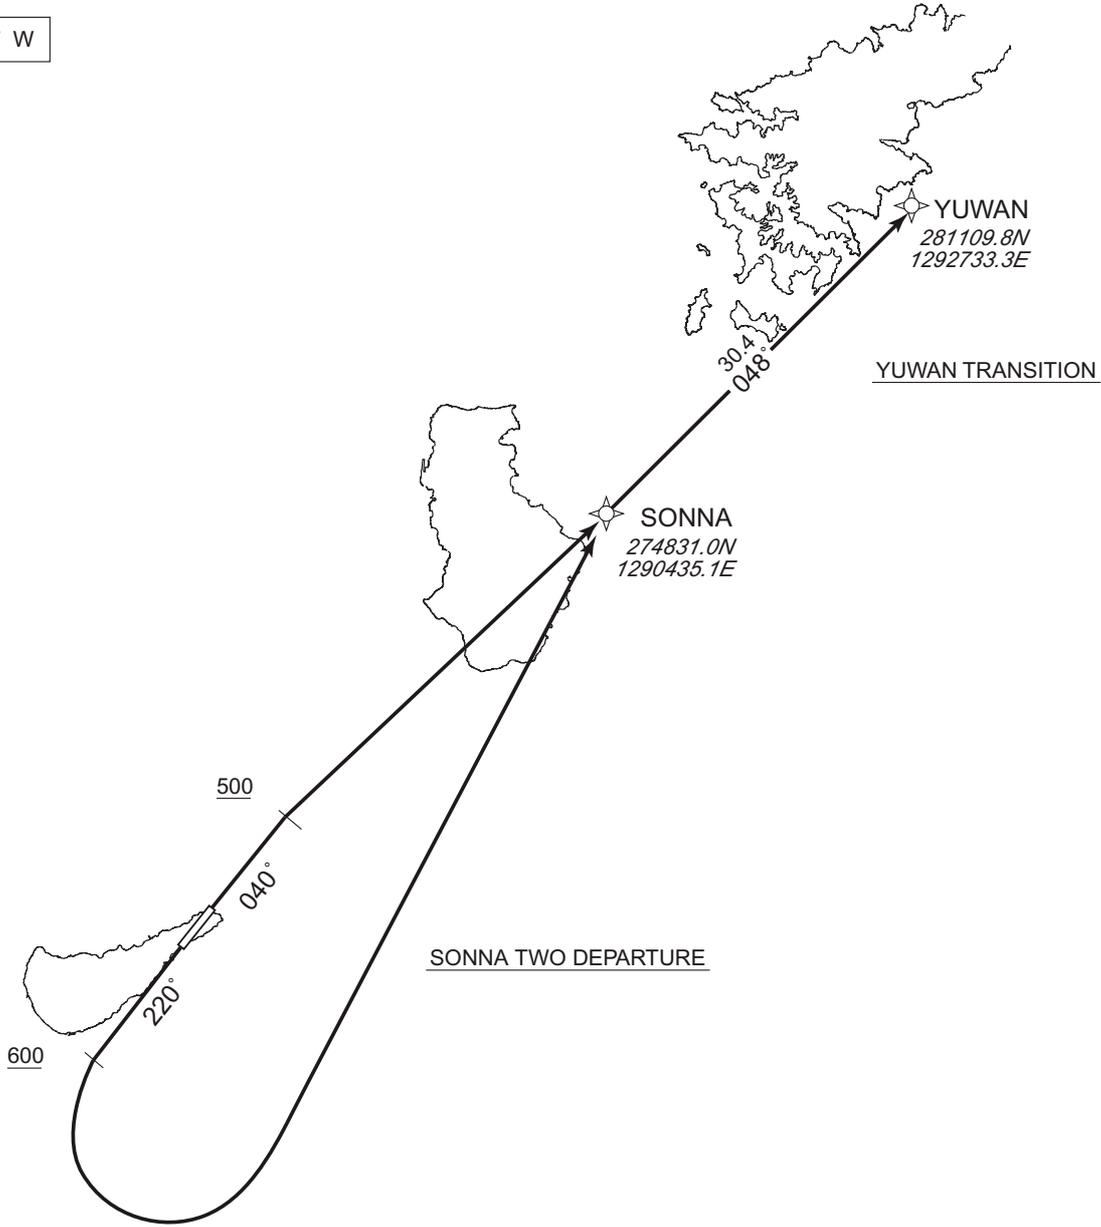

CHANGE : PROC name added. YUWAN TRANSITION added.

SONNA TWO DEPARTURE

RWY04: Climb on HDG040° at or above 500FT, direct to SONNA.  
 RWY22: Climb on HDG220° at or above 600FT, turn left direct to SONNA.  
 Note RWY22 : 5.0% climb gradient required up to 600FT.  
 OBST ALT 145FT located at 0.2NM 257° FM end of RWY22.

YUWAN TRANSITION

From SONNA to YUWAN.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU

RNAV SID and TRANSITION

SONNA TWO DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	040 (034.0)	-6.2	-	-	+500	-	-	RNP1
002	DF	SONNA	-	-	-6.2	-	-	-	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	220 (214.0)	-6.2	-	-	+600	-	-	RNP1
002	DF	SONNA	-	-	-6.2	-	L	-	-	-	RNP1

YUWAN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SONNA	-	-	-6.2	-	-	-	-	-	RNP1
002	TF	YUWAN	-	048 (041.8)	-6.2	30.4	-	-	-	-	RNP1

CHANGE : PROC name added. SONNA TWO DEPARTURE added. True bearing. VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJKB / OKIERABU


RNAV SID

YUNTA TWO DEPARTURE

RNP1

Note GNSS required.

VAR 6° W

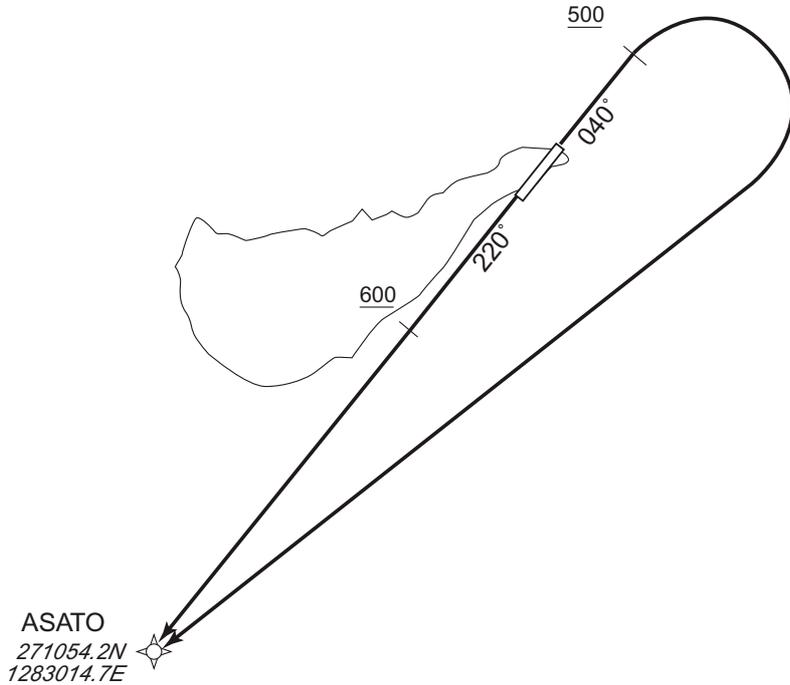

RWY04: Climb on HDG040° at or above 500FT, turn right direct to ASATO.

RWY22: Climb on HDG220° at or above 600FT, direct to ASATO.

Note RWY22 : 5.0% climb gradient required up to 600FT.

OBST ALT 145FT located at 0.2NM 257° FM end of RWY22.

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	040 (034.0)	-6.2	-	-	+500	-	-	RNP1
002	DF	ASATO	-	-	-6.2	-	R	-	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	220 (214.0)	-6.2	-	-	+600	-	-	RNP1
002	DF	ASATO	-	-	-6.2	-	-	-	-	-	RNP1

CHANGE : VAR. True bearing.