


INSTRUMENT APPROACH CHART-ICAO

VAR2.0° W AERODROME ELEV 28.7
THR RWY08 ELEV 18.8 TWR 118.15 (118.85)


ZJSY SANYA/Phoenix
RNP ILS/DME x RWY08(AR)

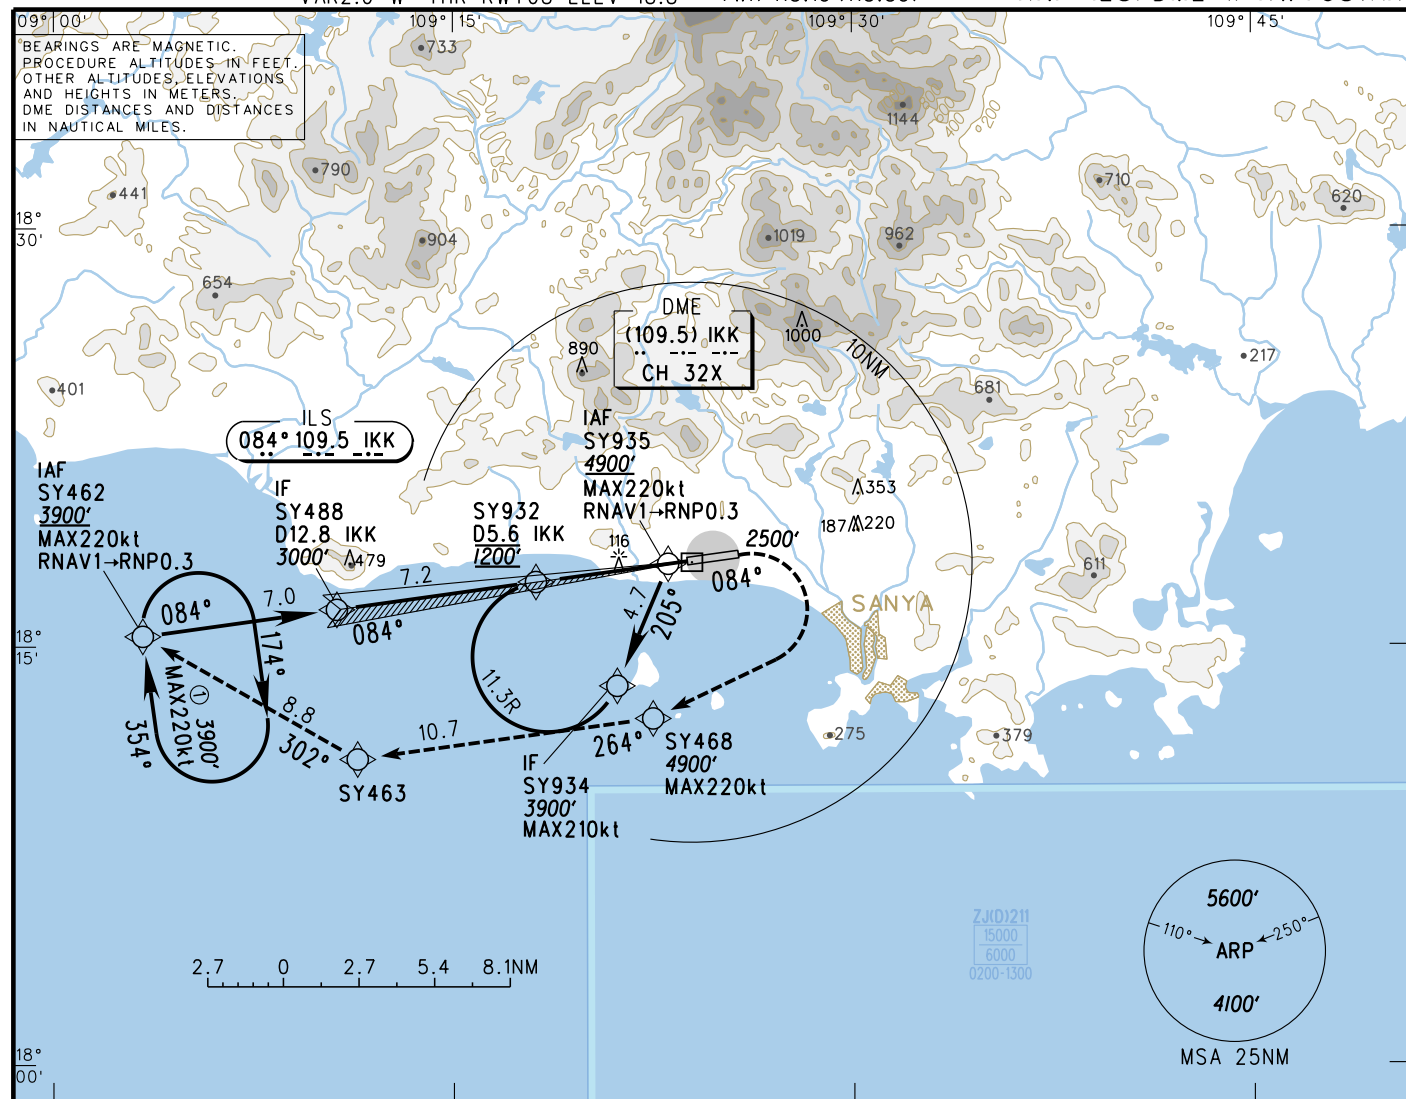

TL 11800'
TA 9800'

MISSED APPROACH

Climb straight ahead to 2500'
(Turning is forbidden before
THR), turn RIGHT and climb
to 4900', fly to SY462 via
SY468 and SY463, join in
holding pattern or by ATC.

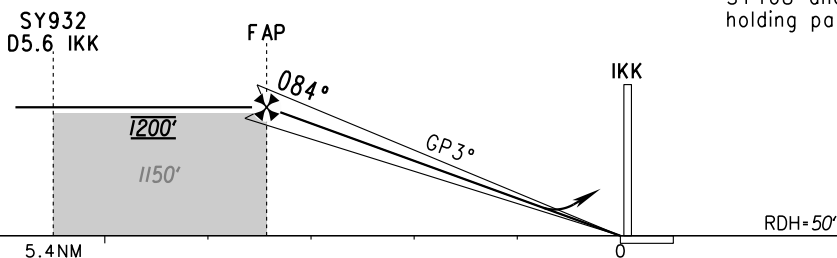

		A	B	C	D
ILS/DME	DA(H) RVR/VIS	79(60) C 800/800			
	B A 4.0%				
	B 2.5%	124(105) 1200/1200		129(110) 1200/1200	

AUTHORIZATION REQUIRED

1. Dual GNSS and IRU required;
2. RF required;
3. Procedure U/S when GP INOP;
4. The navigation specification is RNP1 for missed approach procedure (not AR).

A HUD Special CAT I: (DH)(45), (RA)(48), RVR450.

B Missed approach climb gradient

C RVR550 can be implemented when using approved HUD or AP or FD for approach.

Changes: New chart.