

JACKSONVILLE, FLORIDA

RNAV (RNP) Y RWY 28

| | | |
|----------|------------|------|
| APCH CRS | Rwy ldg | 9003 |
| 276° | TDZE | 13 |
| | Arprt Elev | 23 |

- (USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP AR APCH


▼ * When ALS inop increase CAT ABCD vis to 7/8 mile.



MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

| | | | | | |
|----------------|-----------------|---------------------|-------------|-------------------|---------|
| ATIS | APP CON/DEP CON | TOWER | GND CON | CLNC DEL | ASR/PAR |
| 124.35 290.425 | 127.775 377.075 | 125.15 (CTAF) 340.2 | 128.6 336.4 | 134.775 0 353.675 | |

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

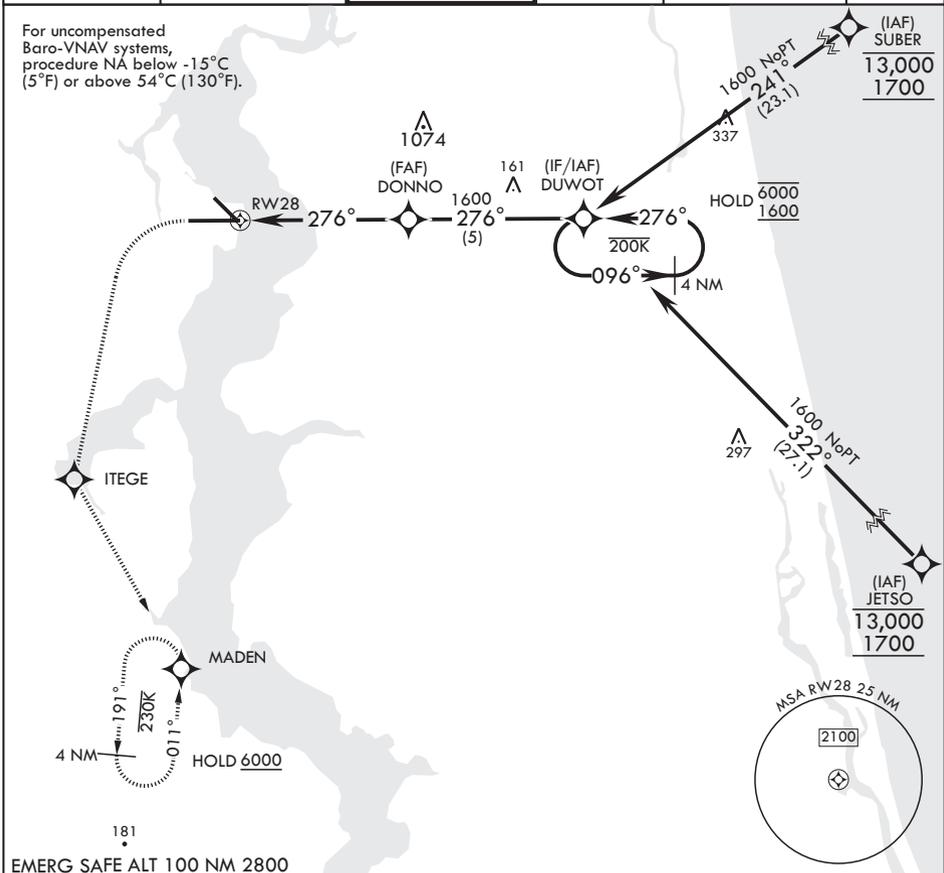



SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025

EMERG SAFE ALT 100 NM 2800

| | | | | |
|------------|------|-------|---------|-------|
| 600 | 2000 | ITEGE | tr 156° | MADEN |
| ↑ crs 276° | ↙ | ✦ | ↖ | ⊗ |

| | |
|---------|---------|
| ELEV 23 | TDZE 13 |
|---------|---------|

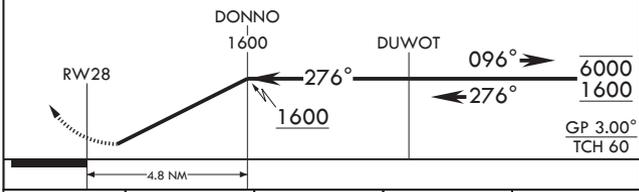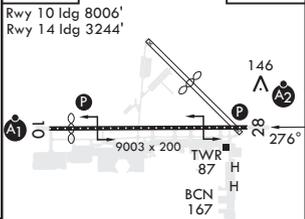

| | | | | | |
|--------------|-------|-----|---------|---|----------------|
| CATEGORY | A | B | C | D | HIRL Rwy 10-28 |
| RNP 0.30 DA* | 310-¾ | 297 | (300-¾) | | |

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amdt 1 03NOV22

RNAV (RNP) Y RWY 28