

STANDARD ARRIVAL CHART-INSTRUMENT


RJSS / SENDAI

RNAV STAR RWY27

LANCE EAST ALFA ARRIVAL

RNP1

Note GNSS required.

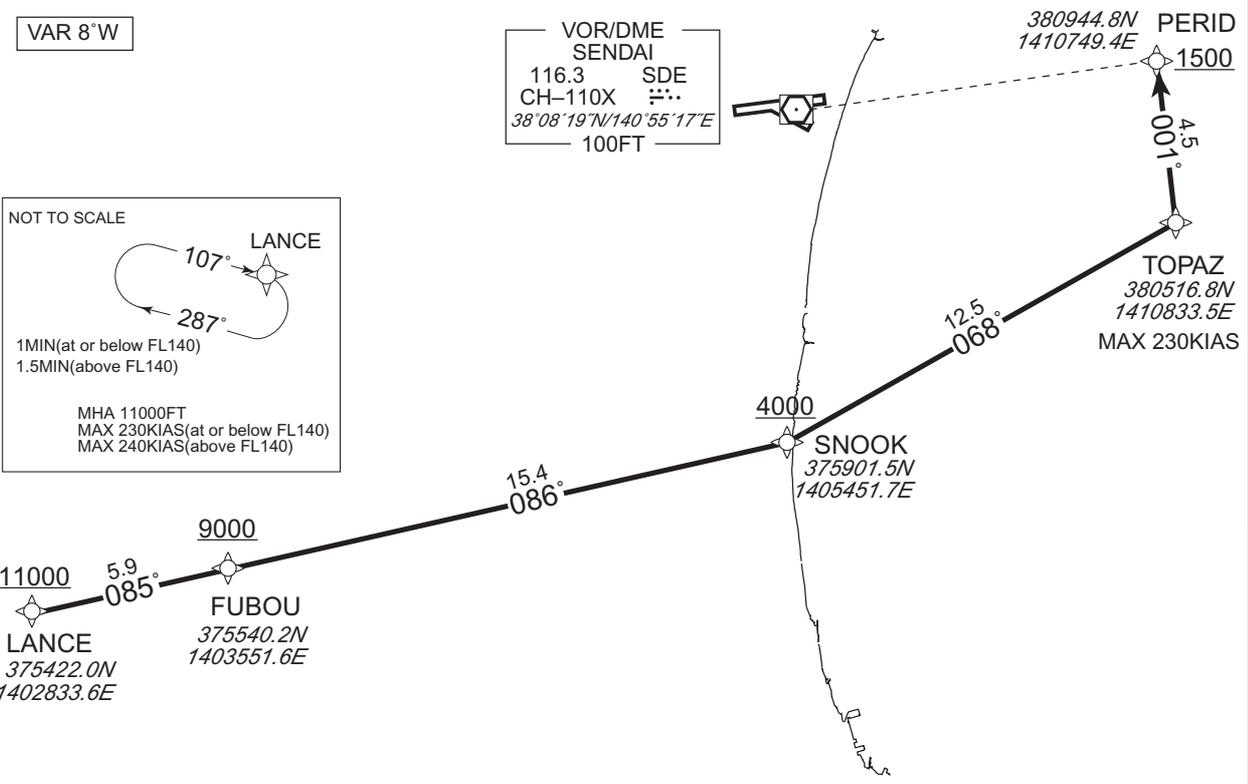

From LANCE at or above 11000FT, to FUBOU at or above 9000FT, to SNOOK at or above 4000FT, to TOPAZ, to PERID at or above 1500FT.

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	LANCE	—	—	-8.3	—	—	+11000	—	—	RNP1
002	TF	FUBOU	—	085 (077.2)	-8.3	5.9	—	+9000	—	—	RNP1
003	TF	SNOOK	—	086 (077.3)	-8.3	15.4	—	+4000	—	—	RNP1
004	TF	TOPAZ	—	068 (059.8)	-8.3	12.5	—	—	-230	—	RNP1
005	TF	PERID	—	001 (352.6)	-8.3	4.5	—	+1500	—	—	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	LANCE	107 (098.3)	-8.3	1.0(-14000) 1.5(+14001)	R	11000	—	-230(-14000) -240(+14001)	RNP1