
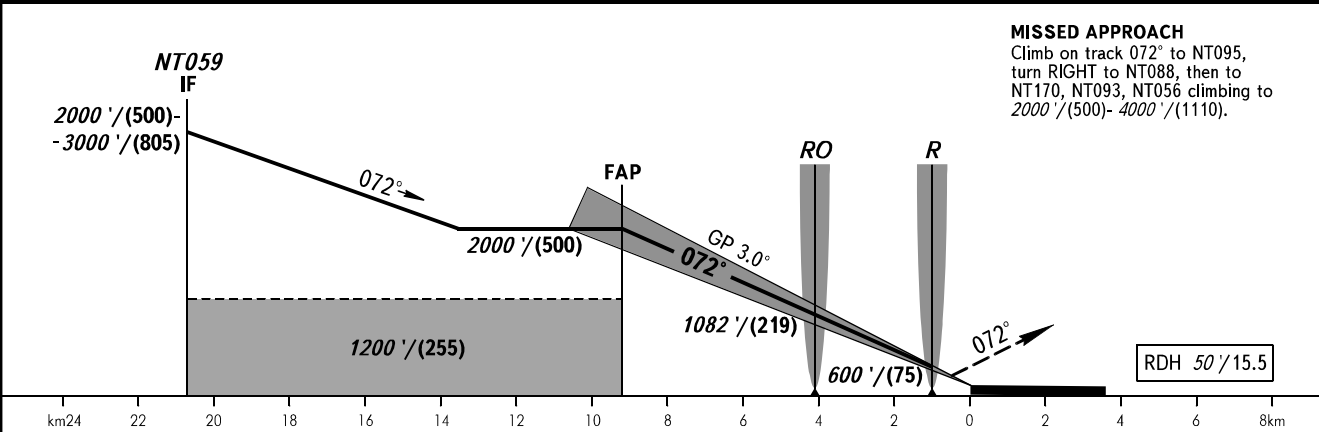


INSTRUMENT
APPROACH
CHART - ICAO

RADAR122.000
TOWER118.500

NOVOSIBIRSK, RUSSIA
TOLMACHEVO
ILS Z CAT I RWY 07

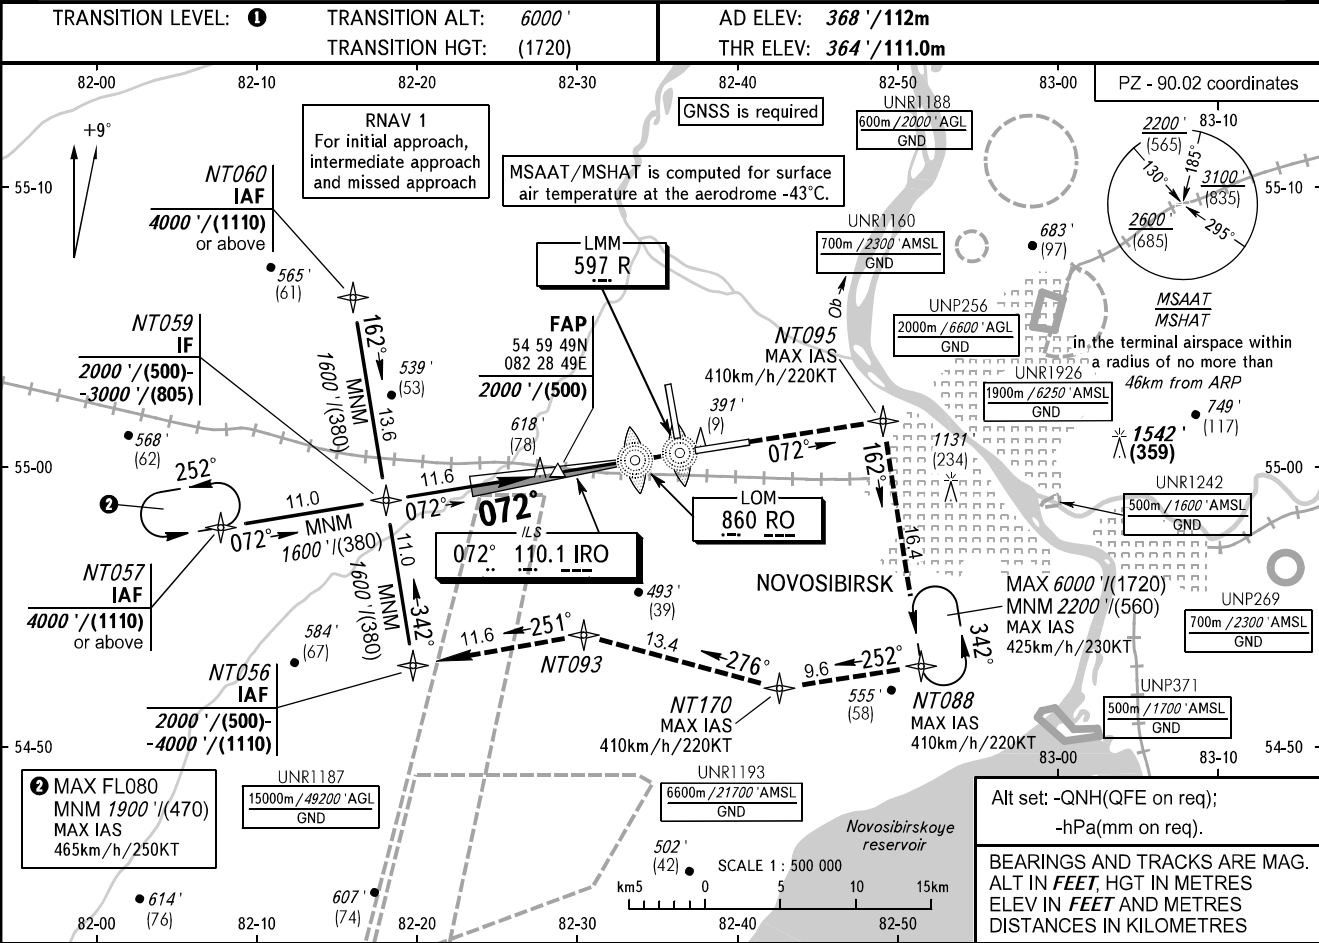

OCA(H)		A		B		C		D		① TRANSITION LEVEL: - FL070 when QNH is 1013 hPa (760mm mercury column) or above; - FL080 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column); - FL090 when QNH is less than 977 hPa (733mm mercury column). WARNING: 1. The approach procedure shall be used, if clearance to cross UNR1187 (during its activity) or arrangement with ATS unit are AVBL. 2. Holding area shall be used, if clearance to cross UNR1187 (during its activity) or arrangement with ATS unit are AVBL.				
Straight-in Approach	CAT I	522' (158') (48)	532' (168') (51)	542' (178') (54)	552' (188') (57)									
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390	420	450	
		kt	81	97	113	130	146	162	178	194	211	227	243	
RATE OF DESCENT		m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5	
		ft / min	427	512	597	682	768	853	938	1024	1109	1194	1280	