


STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV SID

TOYOTA THREE DEPARTURE		RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2 ) RADAR service required.	Critical DME	RWY18 KCC : 3.8NM to DEGNA – DEGNA RWY36 KCC : 3.0NM from DER – 18.0NM to MORIZ XMT : 20.0NM to MORIZ – 18.0NM to MORIZ
	DME GAP	RWY18 : DER – 2.0NM from DER RWY36 : DER – 3.0NM from DER 18.0NM to MORIZ – 14.0NM to MORIZ
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

VAR 8°W

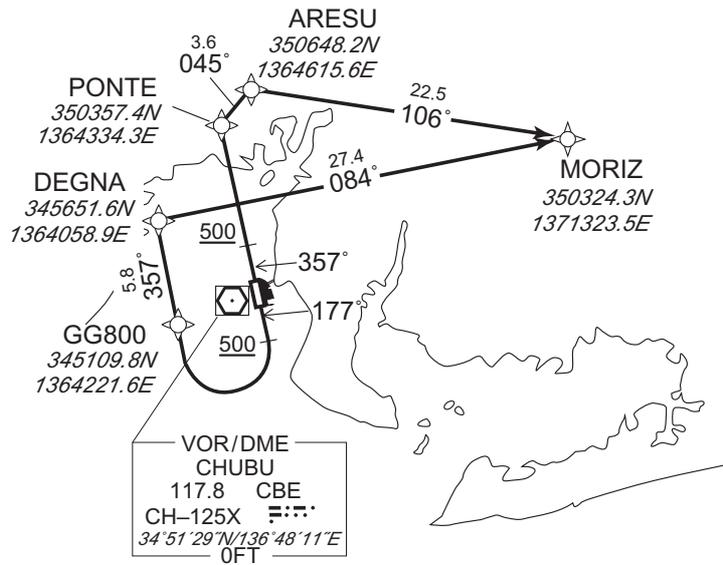

CHANGE : Description of VAR and PROC name.

RWY18 : Climb on HDG177° at or above 500FT, turn right direct to GG800, to DEGNA, to MORIZ.  
 RWY36 : Climb on HDG357° at or above 500FT, direct to PONTE, to ARESU, to MORIZ.

## STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV SID

TOYOTA THREE DEPARTURE

## RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	177 (169.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	GG800	—	—	-7.8	—	R	—	—	—	RNAV1
003	TF	DEGNA	—	357 (348.8)	-7.8	5.8	—	—	—	—	RNAV1
004	TF	MORIZ	—	084 (076.0)	-7.8	27.4	—	—	—	—	RNAV1

## RWY36


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	357 (349.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	PONTE	—	—	-7.8	—	—	—	—	—	RNAV1
003	TF	ARESU	—	045 (037.7)	-7.8	3.6	—	—	—	—	RNAV1
004	TF	MORIZ	—	106 (098.6)	-7.8	22.5	—	—	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR RNAV TRANSITION

IIDA TRANSITION		RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. 2 ) RADAR service required.	Critical DME	XMT : 3.7NM to TSUGU – TSUGU KCC : MORIZ – TSUGU
	DME GAP	-
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

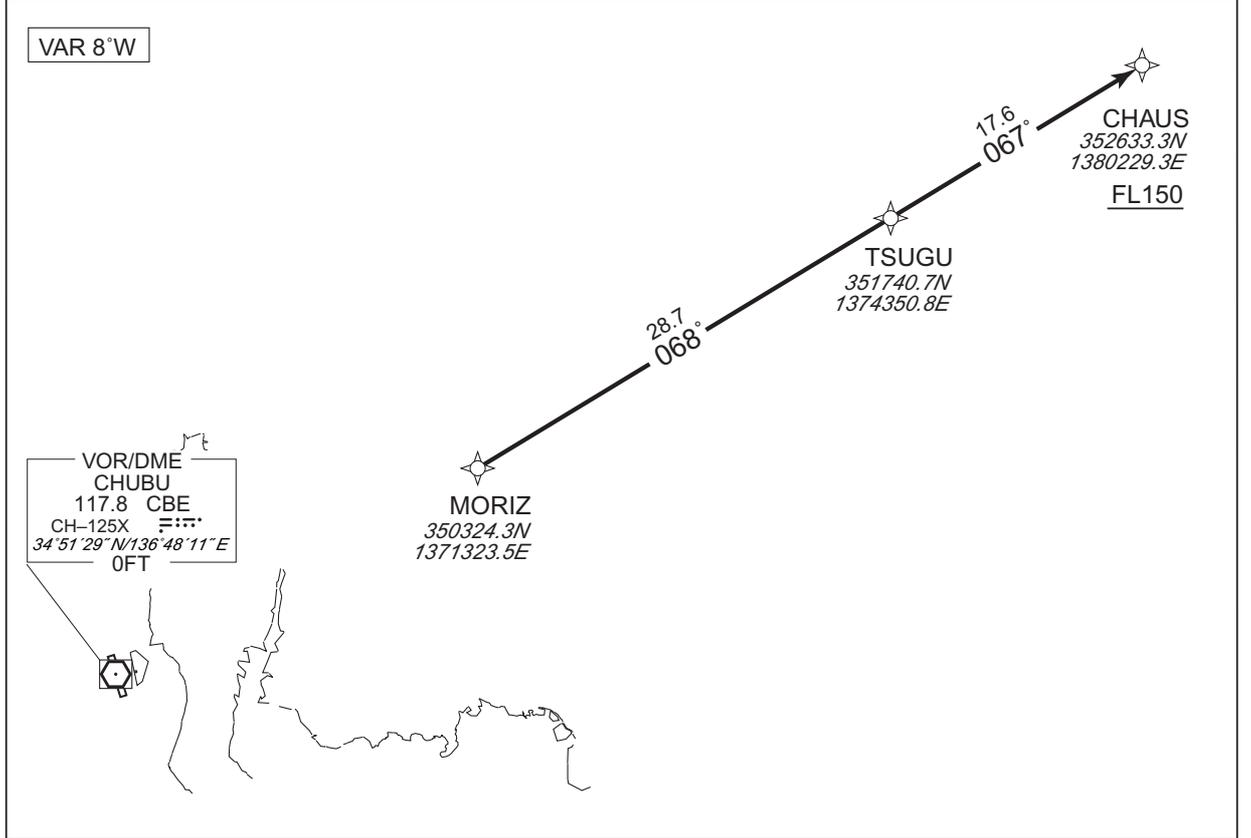

From MORIZ, to TSUGU, to CHAUS at or above FL150.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MORIZ	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	TSUGU	—	068 (060.0)	-7.8	28.7	—	—	—	—	RNAV1
003	TF	CHAUS	—	067 (059.6)	-7.8	17.6	—	+FL150	—	—	RNAV1

CHANGE : Critical DME.

**INTENTIONALLY LEFT BLANK**