


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Szczecin TOWER
ATIS 121.255
132.130

Szczecin - Goleniów
RNP RMY 31
APNEZ 1F BINKA 1F NEHIM 1F
PESEL 1F UNVOX 1F

Correction: EP R22 changed.

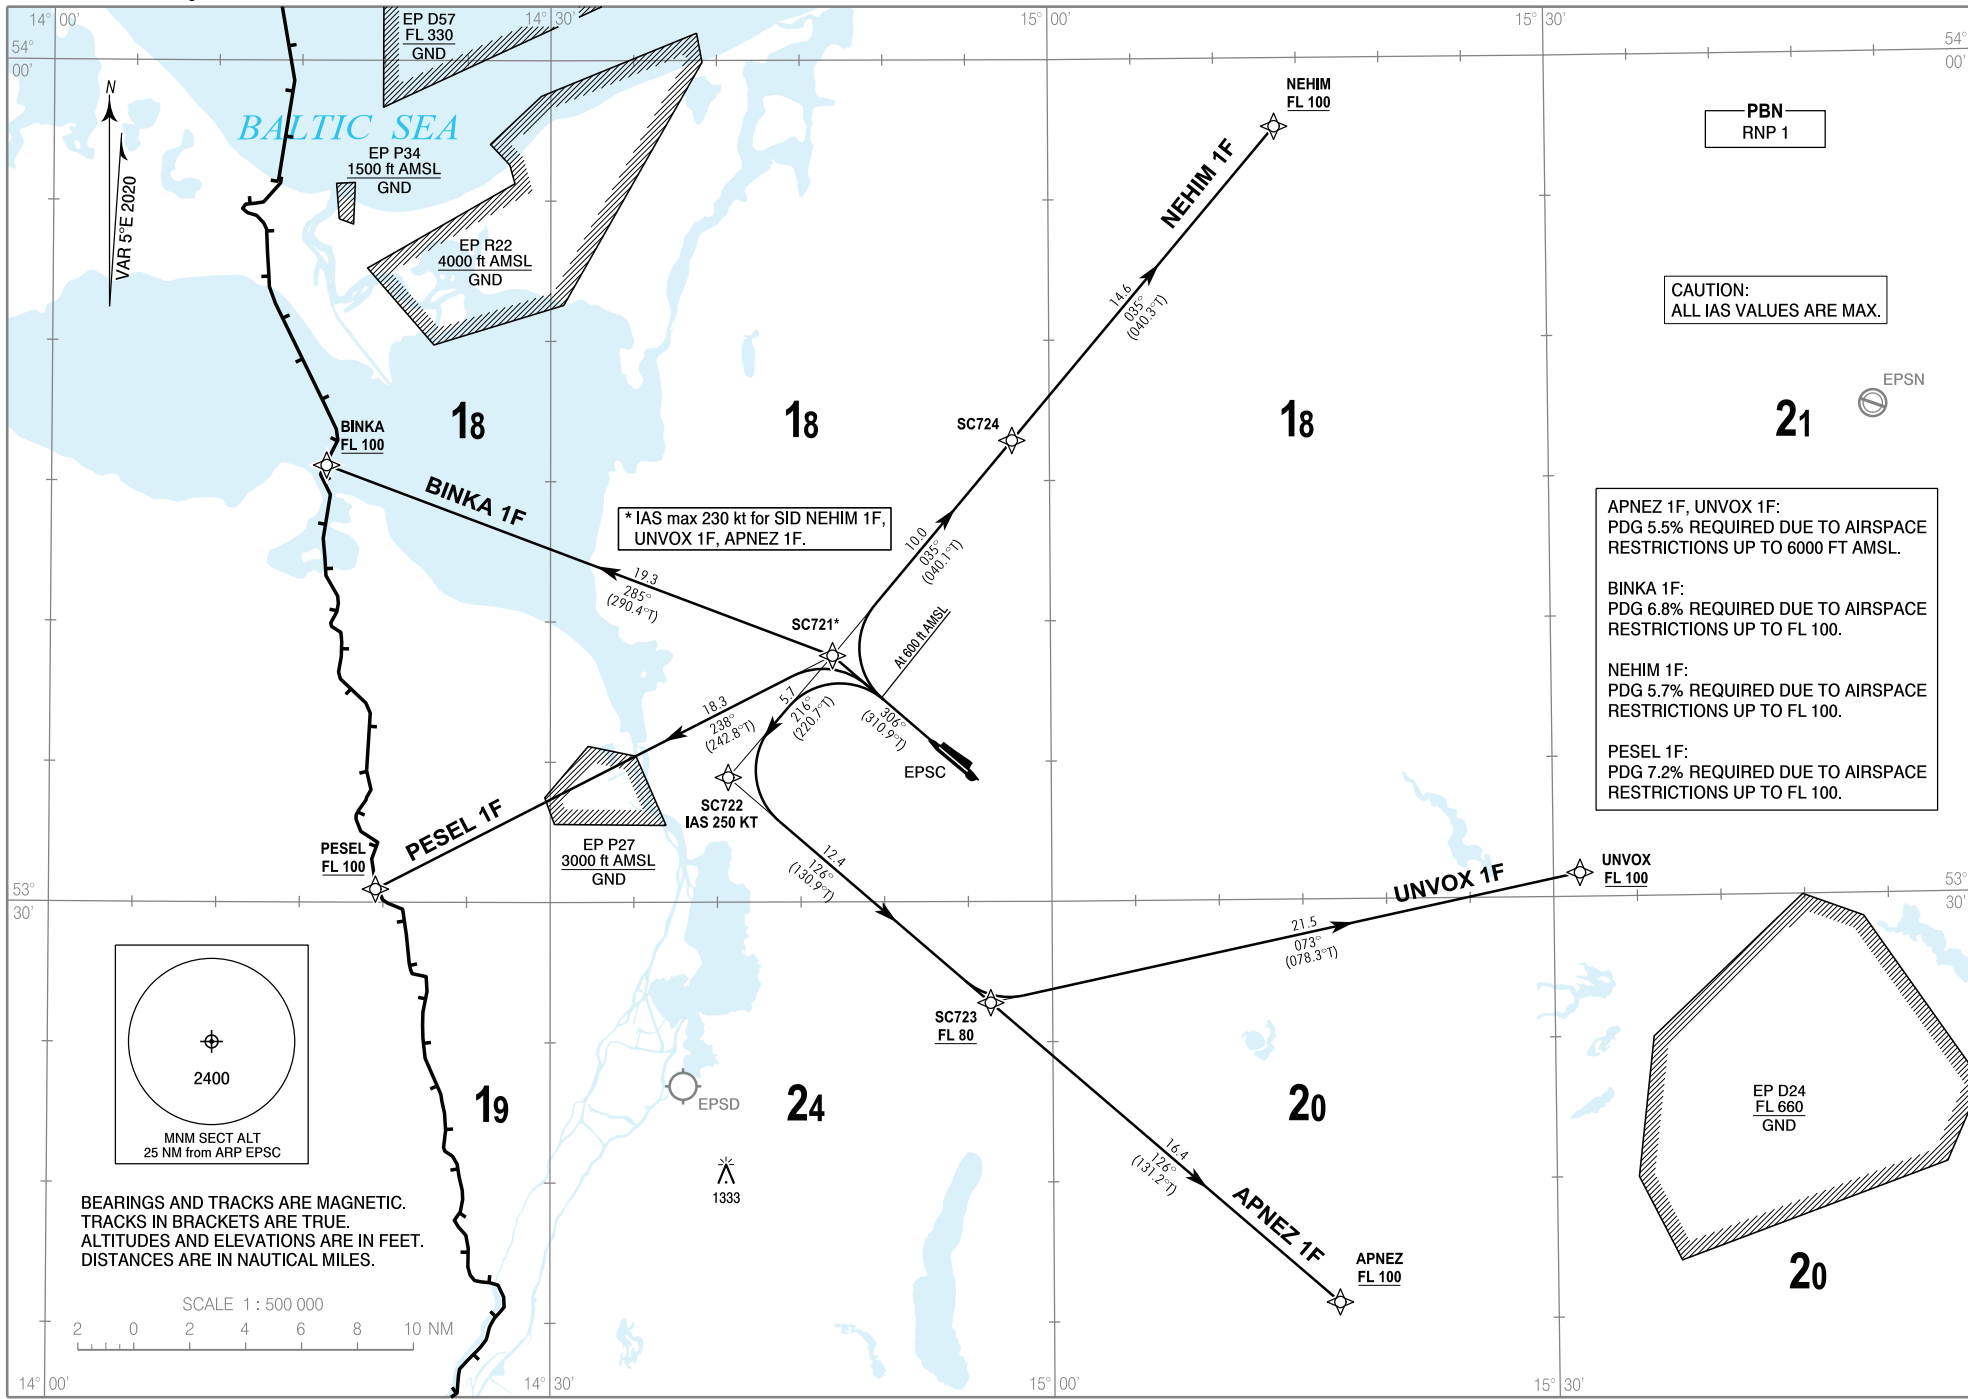

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Szczecin - Goleniów
RNP RWY 31
APNEZ 1F BINKA 1F NEHIM 1F
PESEL 1F UNVOX 1F

APNEZ 1F

PDG 5.5% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 6000 FT AMSL

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	VA	-	-	306 (310.9)		-	+600 ft	-	RNP 1
002	DF	SC721	-	-		-	-	-230	RNP 1
003	TF	SC722	-	216 (220.7)	5.72	-	-	-250	RNP 1
004	TF	SC723	-	126 (130.9)	12.35	-	+FL80	-	RNP 1
005	TF	APNEZ	-	126 (131.2)	16.43		+FL100	-	RNP 1
* FOR VA READ „VECTOR”									

BINKA 1F

PDG 6.8% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO FL100

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	VA	-	-	306 (310.9)	-	-	+600 ft	-	RNP 1
002	DF	SC721	-	-	-	-	-	-	RNP 1
003	TF	BINKA	-	285 (290.4)	19.30	-	+FL100	-	RNP 1
* FOR VA READ „VECTOR”									

NEHIM 1F

PDG 5.7% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO FL100

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	VA	-	-	306 (310.9)	-	-	+600 ft	-	RNP 1
002	DF	SC721	-	-	-	-	-	-230	RNP 1
003	TF	SC724	-	035 (040.1)	10.00	-	-	-	RNP 1
004	TF	NEHIM	-	035 (040.3)	14.60	-	+FL100	-	RNP 1
* FOR VA READ „VECTOR”									

PESEL 1F

PDG 7.2% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO FL100

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	VA	-	-	306 (310.9)	-	-	+600 ft	-	RNP 1
002	DF	SC721	-	-	-	-	-	-	RNP 1
003	TF	PESEL	-	238 (242.8)	18.32	-	+FL100	-	RNP 1
* FOR VA READ „VECTOR”									

UNVOX 1F

PDG 5.5% REQUIRED DUE TO AIRSPACE RESTRICTIONS UP TO 6000 FT AMSL

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	VA	-	-	306 (310.9)	-	-	+600 ft	-	RNP 1
002	DF	SC721	-	-	-	-	-	-230	RNP 1
003	TF	SC722	-	216 (220.7)	5.72	-	-	-250	RNP 1
004	TF	SC723	-	126 (130.9)	12.35	-	+FL80	-	RNP 1
005	TF	UNVOX	-	073 (078.3)	21.54	-	+FL100	-	RNP 1
* FOR VA READ „VECTOR”									

WAYPOINT IDENTIFIER	COORDINATES	
APNEZ	53 15 38.0 N	015 17 00.0 E
BINKA	53 45 34.4 N	014 16 32.1 E
DER31	53 35 31.5 N	014 53 16.5 E
NEHIM	53 57 34.0 N	015 13 40.0 E
PESEL	53 30 28.0 N	014 19 33.0 E
SC721	53 38 47.4 N	014 46 55.4 E
SC722	53 34 27.4 N	014 40 39.4 E
SC723	53 26 23.8 N	014 56 18.6 E
SC724	53 46 26.1 N	014 57 44.8 E
UNVOX	53 30 51.0 N	015 31 35.0 E