

# MOLOKAI FIVE DEPARTURE

RADAR and DME required

**TOP ALTITUDE:  
ASSIGNED BY ATC**


### TAKEOFF MINIMUMS

Rwys 26L/R: Standard.  
 Rwys 4L/R: Standard with minimum climb of 425' per NM to 1900, do not exceed 180K until established on assigned heading.  
 Rwy 8L: Standard with minimum climb of 313' per NM to 1400.  
 Rwy 8R: Standard with minimum climb of 296' per NM to 500.

HCF APPROACH  
 124.8 317.6  
 D-ATIS  
 127.9 251.15  
 CLNC DEL  
 121.4 281.4  
 GND CON  
 121.9 348.6  
 HONOLULU TOWER  
 118.1 257.8  
 123.9 273.575 (Rwy 8R/26L)

PAC, 20 FEB 2025 to 17 APR 2025

PAC, 20 FEB 2025 to 17 APR 2025

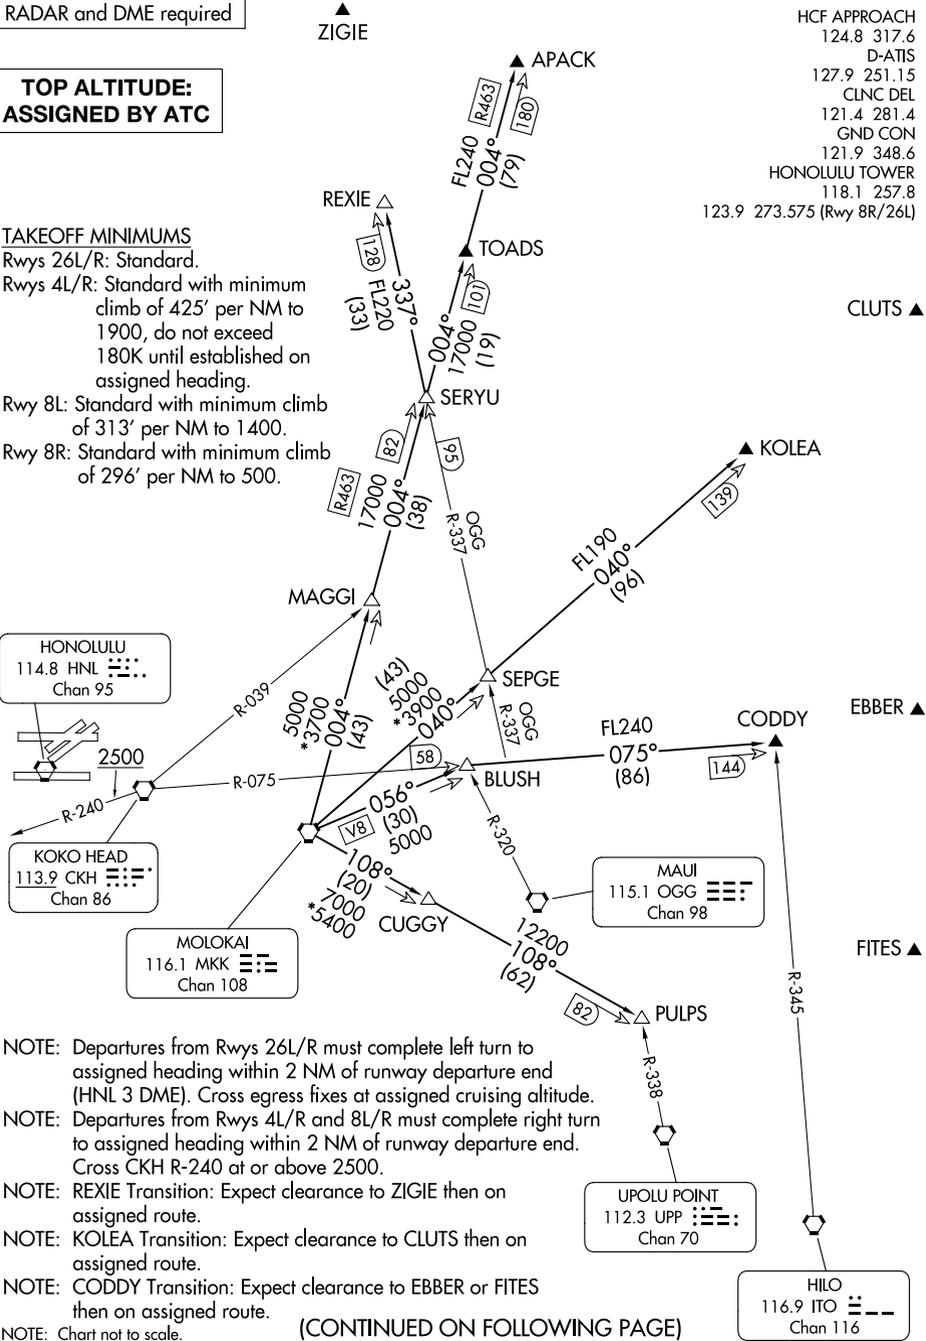

# MOLOKAI FIVE DEPARTURE