

STANDARD ARRIVAL
CHART-INSTRUMENT

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

APP05 126.5 (119.625)	APP13 121.25 (119.425)	TWR01 118.825 (124.35)
APP06 119.925 (119.625)	APP14 126.3 (119.425)	TWR02 118.375 (124.35)
APP10 129.0 (127.75)	APP15 125.8 (119.425)	TWR04 118.725 (130.3)
APP12 119.85 (119.425)	APP17 120.6 (127.75)	

ZBAD BEIJING/Daxing

VAR 7.5° W

D-ATIS(Chinese) 127.225
D-ATIS(English) 128.4

RNAV RWY 35L/35R/01L (BELAX/ELAPU)

TL 3600
TA 3000
3300 (QNH ≥ 1031hPa)
2700 (QNH ≤ 979hPa)



RNAV1
GNSS
or DME/DME/IRU
RADAR REQUIRED


Notes:
1. Communication failure:
A/C shall keep track to IAF, and conduct
RWY01L ILS/DME approach procedure.
2. Ⓜ No aircraft is permitted to maneuver or
circumnavigate CB in Prohibited Fly Over Area.



GUANZHUANG
114.7 PEK
CH 94X
N40 02.9E116 44.1



DAXING
115.35 DXG
CH 100Y
N39 28.5E116 23.6

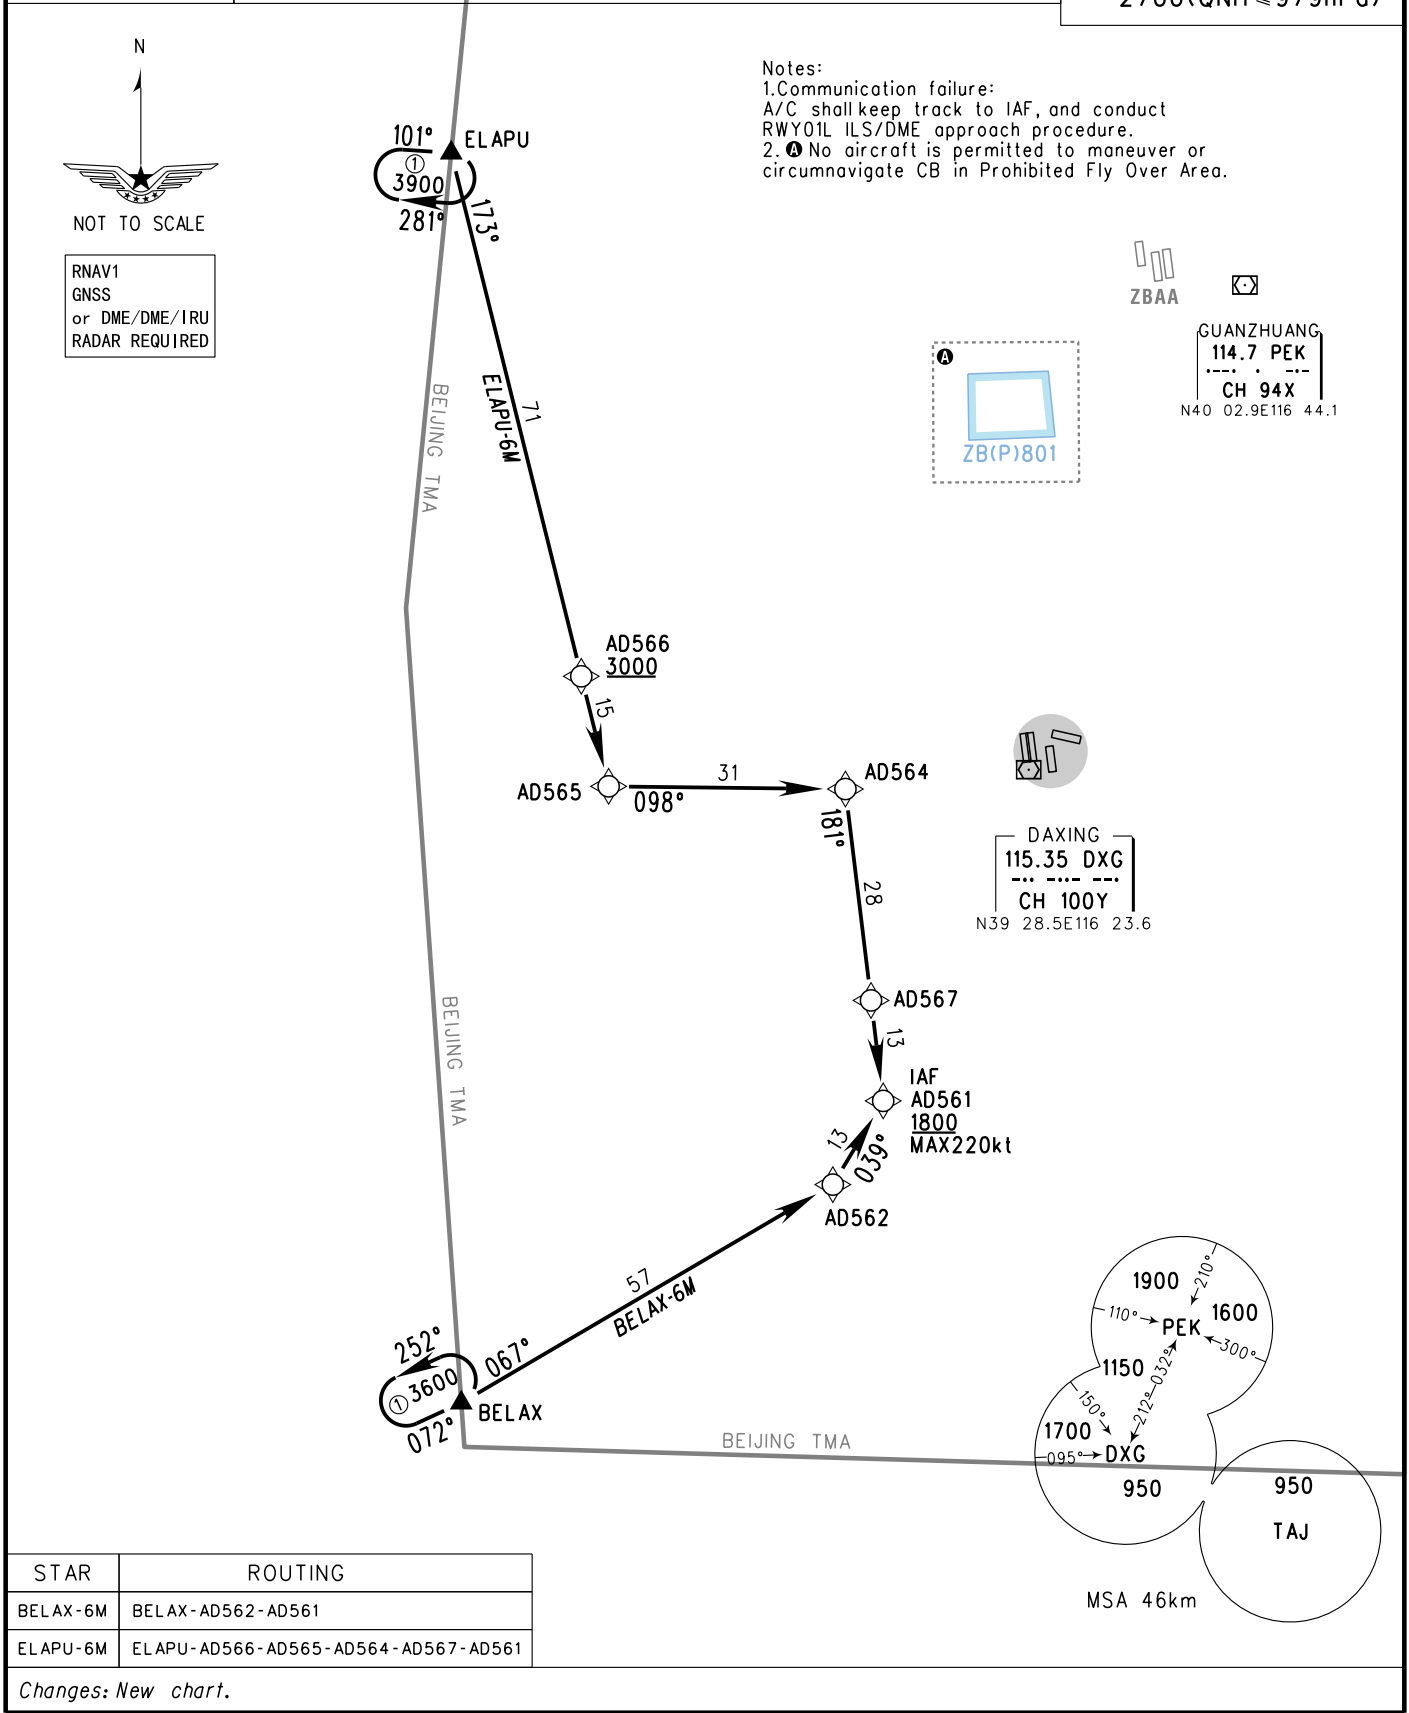

STAR	ROUTING
BELAX-6M	BELAX-AD562-AD561
ELAPU-6M	ELAPU-AD566-AD565-AD564-AD567-AD561