

STANDARD ARRIVAL CHART -INSTRUMENT


RJFK / KAGOSHIMA

RNAV STAR RWY34

KINKOH ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

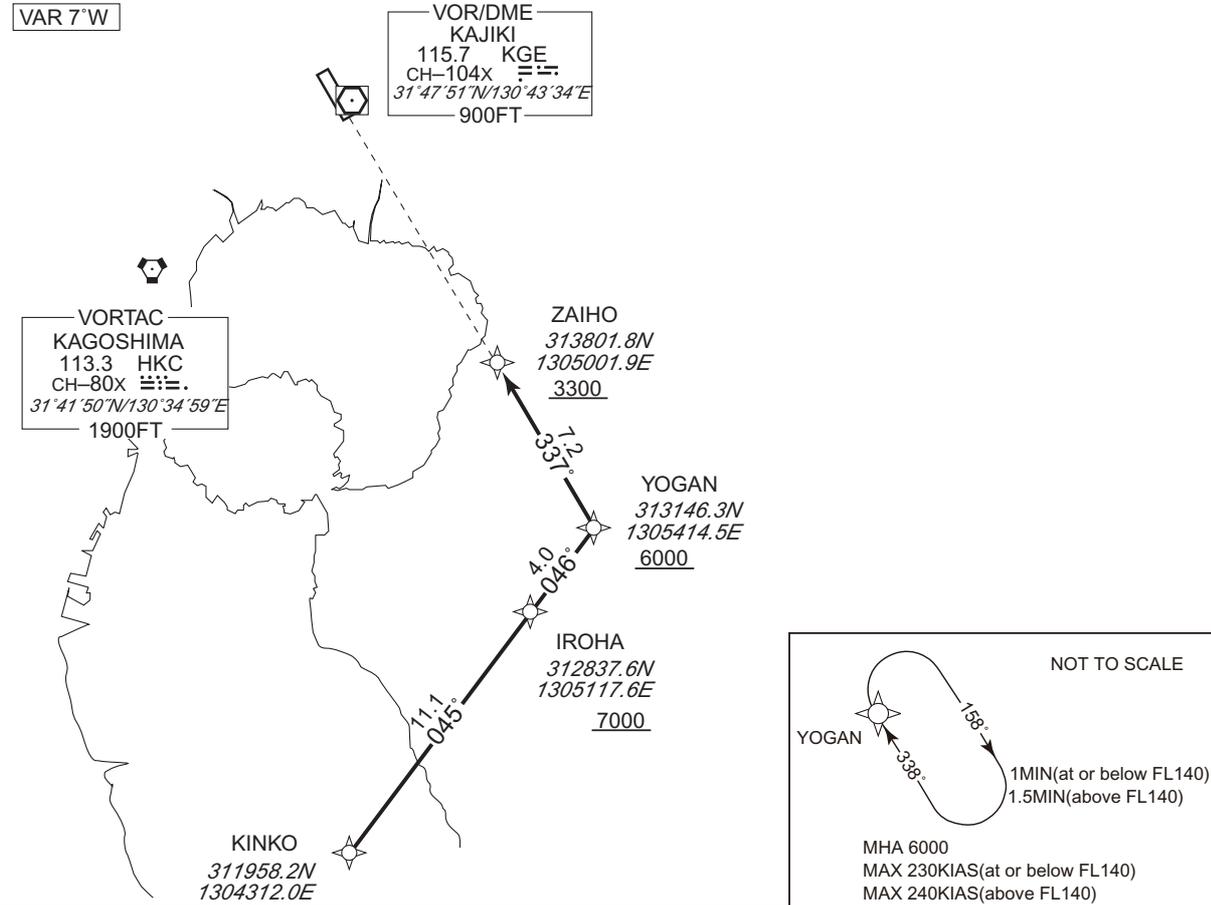

From KINKO, to IROHA at or above 7000FT, to YOGAN at or above 6000FT, to ZAIHO at or above 3300FT.

Critical DME	JAT : 10.2NM to IROHA – 5.7NM to IROHA NHT : 5.6NM to IROHA – 2.4NM to IROHA 2.4NM to ZAIHO – 1.2NM to ZAIHO HKC : 4.4NM to ZAIHO – 1.3NM to ZAIHO
DME GAP	-
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KINKO	-	-	-6.9	-	-	-	-	-	RNAV1
002	TF	IROHA	-	045 (038.6)	-6.9	11.1	-	+7000	-	-	RNAV1
003	TF	YOGAN	-	046 (038.6)	-6.9	4.0	-	+6000	-	-	RNAV1
004	TF	ZAIHO	-	337 (330.2)	-6.9	7.2	-	+3300	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	YOGAN	338 (330.2)	-7.4	1.0(-14000) 1.5(+14001)	R	6000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : RNAV HLDG established. HLDG for using NAVAID abolished(YOGAN).