RNAV (GPS) RWY 11

WORCESTER RGNL (ORH)

WAAS	APP CRS		
CH 77999 W11A	109°	Rwy Idg	7001
		TDZE	980
		Apt Elev	1009

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA.
Inop table does not apply to LPV all Cats.
Inop table does not apply to LNAV Cats A/B.

ALSF-2

MISSED APPROACH: Climb to 2700 direct SPAGS and hold.

ATIS	BRADLEY APP CON	WORCESTER TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.55	119.0 327.1	120.5 (CTAF) L 263.0	123.85	128.65	119.0 (When twr closed)	122.95

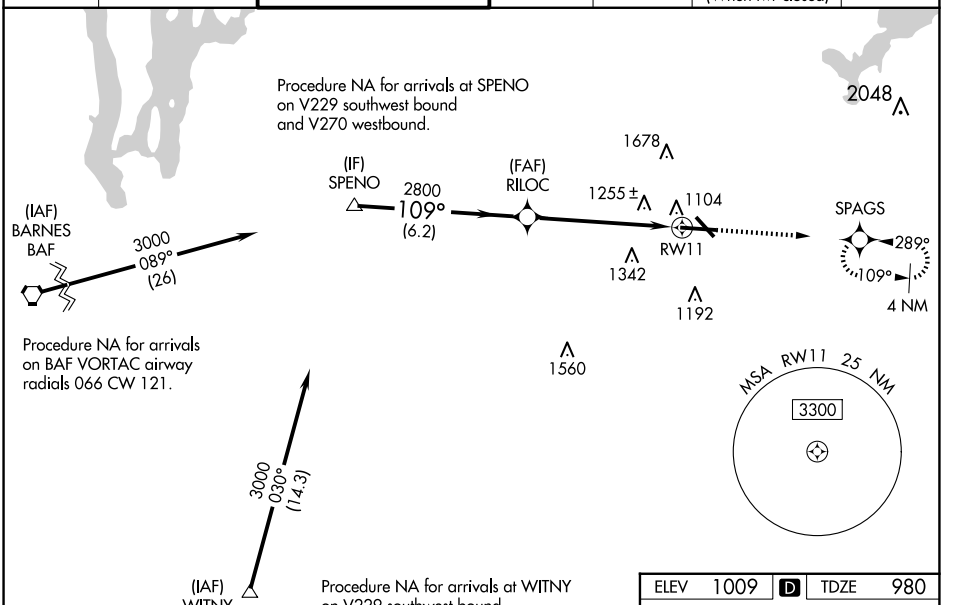

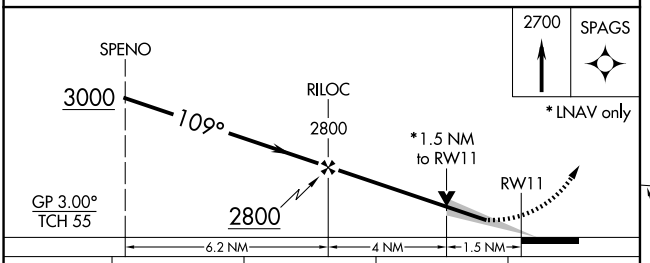

CATEGORY	A	B	C	D
LPV DA	1180/40 200 (200-¾)			
LNAV/VNAV DA	1565-1½ 585 (600-1½)			
LNAV MDA	1520/40 540 (600-¾)		1520/55 540 (600-1)	
C CIRCLING	1560-1 551 (600-1)	1720-1 711 (800-1)	2000-3 991 (1000-3)	

ELEV 1009 D TDZE 980



TDZ/CL Rwy 11
REIL Rwys 15, 29, and 33 L
HIRL Rwy 11-29 L
MIRL Rwy 15-33 L

NE-1, 20 MAR 2025 to 17 APR 2025
NE-1, 20 MAR 2025 to 17 APR 2025