



INSTRUMENT APPROACH CHART

RJCB / OBIHIRO

RNP RWY17(AR)

HIDAKA APP 128.325 - 134.55	RNP AR RF required	OBIHIRO TOWER 118.7 - 126.2 - 123.6	RADAR AVBL
--------------------------------	-----------------------	--	------------

For uncompensated Baro-VNAV systems, procedure not authorized below -30°C / above 45°C

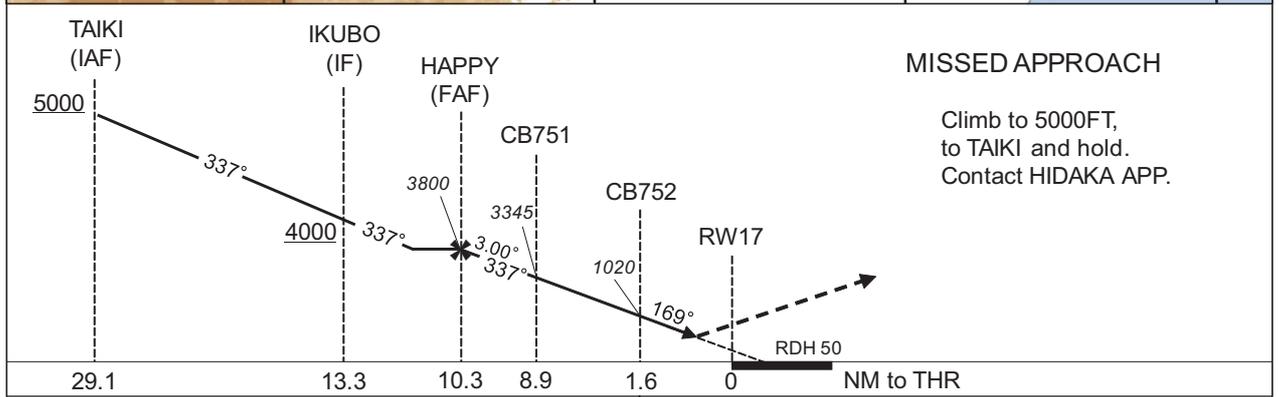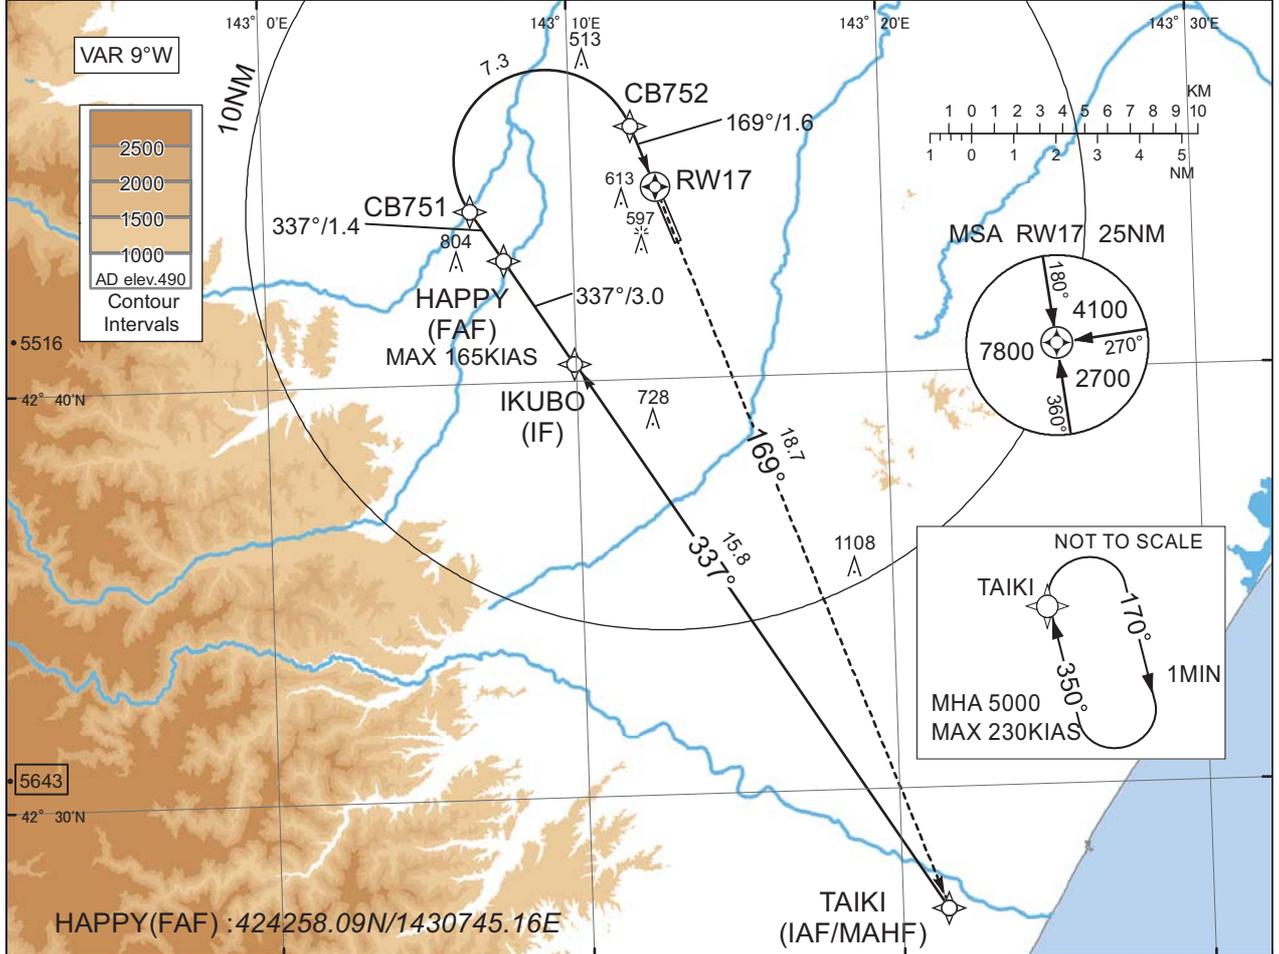

MINIMA	THR elev. 470	AD elev. 490
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	770(300)	1400
D	774(304)	1600

Authorization Required

CHANGE : IKUBO established. CB750 abolished.

INSTRUMENT APPROACH CHART

RJCB / OBIHIRO

RNP RWY17(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	TAIKI	-	-	-9.4	-	-	+5000	-	-	-
002	TF	IKUBO	-	337 (327.6)	-9.4	15.8	-	+4000	-	-	1.0
003	TF	HAPPY	-	337 (327.5)	-9.4	3.0	-	3800	-165	-	1.0
004	TF	CB751	-	337 (327.4)	-9.4	1.4	-	3345	-	-3.00	0.3
005	RF Center: CBRF1 r=2.18NM	CB752	-	-	-9.4	7.3	R	1020	-	-3.00	0.3
006	TF	RW17	Y	169 (159.4)	-9.4	1.6	-	520	-	-3.00/50	0.3
007	TF	TAIKI	-	169 (159.8)	-9.4	18.7	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	TAIKI	350 (340.3)	-9.4	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TAIKI	422706.29N / 1432128.22E	CBRF1	424520.85N / 1430911.91E
IKUBO	424026.47N / 1430956.82E		
HAPPY	424258.09N / 1430745.16E		
CB751	424410.25N / 1430642.42E		
CB752	424607.16N / 1431158.01E		
RW17	424438.86N / 1431243.31E		

CHANGE : IKUBO established. CB750 abolished.