

STANDARD DEPARTURE CHART - INSTRUMENT

VAR 7.5° W


D-ATIS(Chinese) 127.225
 D-ATIS(English) 128.4
 TWR02 118.375(124.35)
 TWR03 130.425(130.3)

ZBAD BEIJING/Daxing RNAV RWY01L/11L(IDKEX/DOTRA)

BEARINGS ARE MAGNETIC.
 ALTITUDES, ELEVATIONS
 AND HEIGHTS IN METERS.
 DME DISTANCES IN
 NAUTICAL MILES.
 DISTANCES IN KM.

TL 3600
 TA 3000
 3300(QNH ≥ 1031hPa)
 2700(QNH ≤ 979hPa)

APP01 126.1(125.05) APP13 121.25(119.425)
 APP03 120.2(125.05) APP14 126.3(119.425)
 APP06 119.925(119.625) APP15 125.8(119.425)
 APP07 120.0(119.625) APP16 124.4(127.75)
 APP11 119.7(127.75) APP17 120.6(127.75)
 APP12 119.85(119.425)

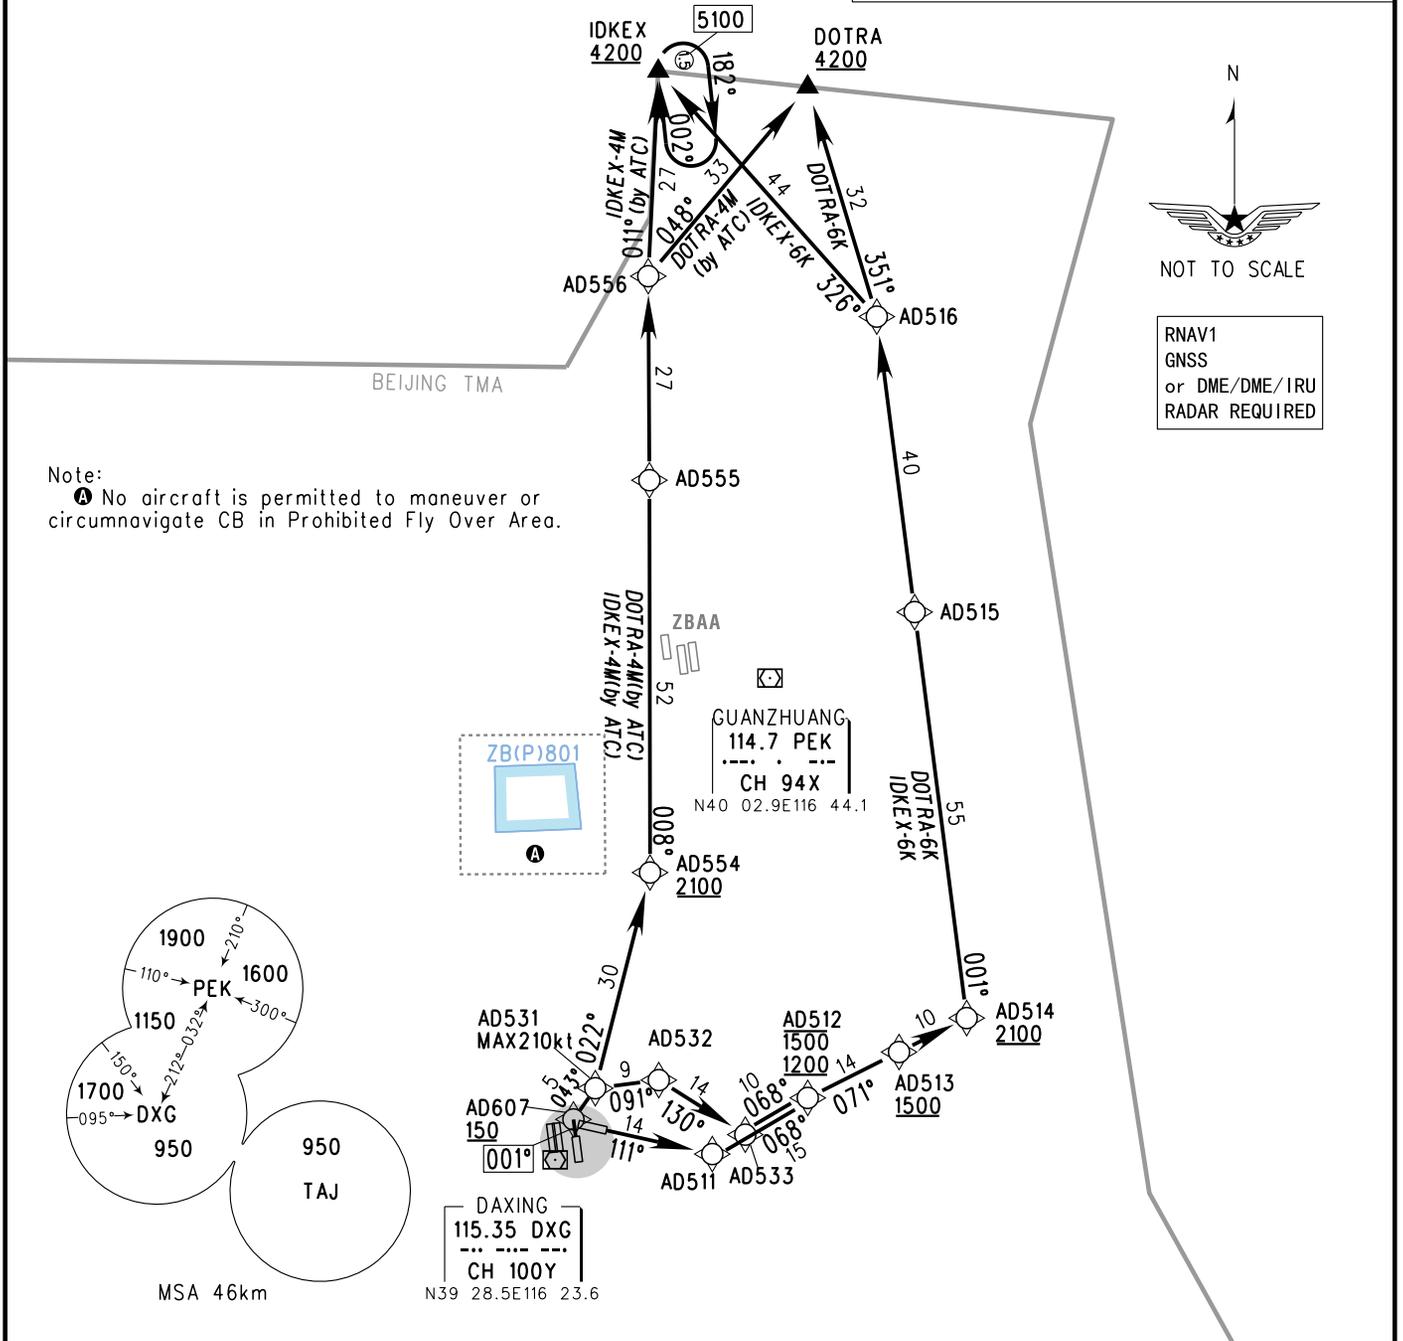

RNAV1
 GNSS
 or DME/DME/IRU
 RADAR REQUIRED

RWY	SID	ROUTING
01L	IDKEX-6K	by ATC AD607-AD531-AD532-AD533-AD512
11L		AD511-AD512
01L	DOTRA-6K	by ATC AD607-AD531-AD532-AD533-AD512
11L		AD511-AD512
01L	IDKEX-4M (by ATC)	AD607-AD531-AD554-AD555-AD556-IDKEX
01L	DOTRA-4M (by ATC)	AD607-AD531-AD554-AD555-AD556-DOTRA

Changes: New chart.