

WAAS CH 77929 W11A	APP CRS 111°	Rwy Idg TDZE 1988 Apt Elev 1989	5091
--	------------------------	---	-------------


RNAV (GPS) RWY 11

L M CLAYTON (OLF')

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokal FLD/Glasgow-Valley County altimeter setting: increase LPV DA to 2329 ft and visibility ¾ SM, LNAV/VNAV DA to 2407 ft and visibility ½ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4800 direct
CARAV and hold.

ASOS 118.325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
------------------------	---	--

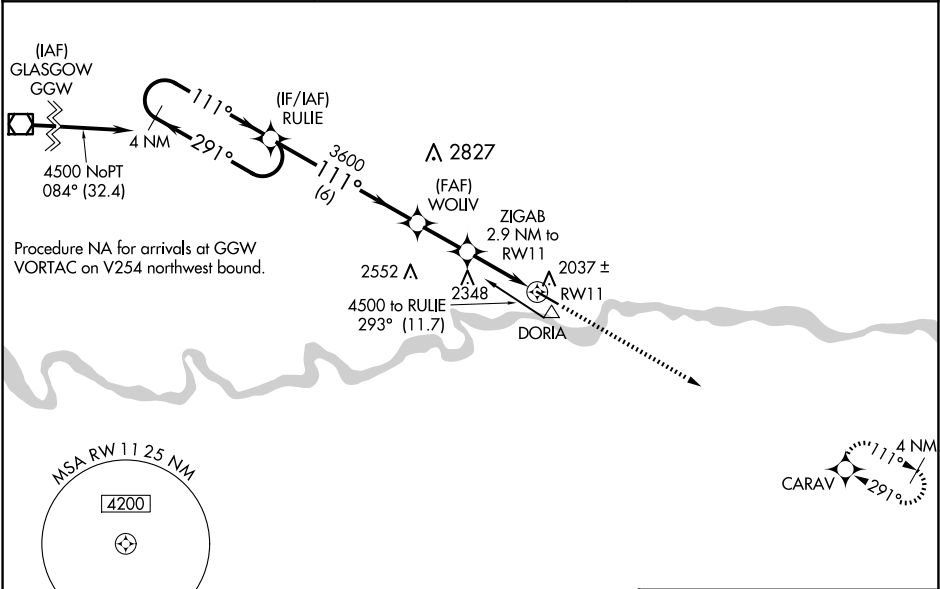

4 NM Holding Pattern

RULIE

WOLIV

ZIGAB

2.9 NM to RW11

*1.5 NM to RW11

RW11

4800

CARAV

*LNAV only.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

4500

←291°

111°→

GP 3.00° TCH 40

3600

3600

*2940

6 NM

2 NM

1.4 NM

1.5 NM

CATEGORY	A	B	C	D
LPV DA	2188-¾ 200 (200-¾)			
LNAV/VNAV DA	2266-7/8 278 (300-7/8)			
LNAV MDA	2500-1	512 (600-1)	2500-1¾	512 (600-1¾)
CIRCLING	2500-1	511 (600-1)	2660-2 671 (700-2)	2780-2½ 791 (800-2½)

