


INSTRUMENT
APPROACH
CHART - ICAO

KAZAN, RUSSIA
KAZAN
GLS RWY 29


RADAR 119.400
START 120.300

GBAS CH 21156 G29A **TRANSITION LEVEL:** ① **TRANSITION ALT:** 4000' **AD ELEV:** 410' / 125m
CH 21156 G29A **TRANSITION HGT:** (1100) **THR ELEV:** 410' / 125.0m

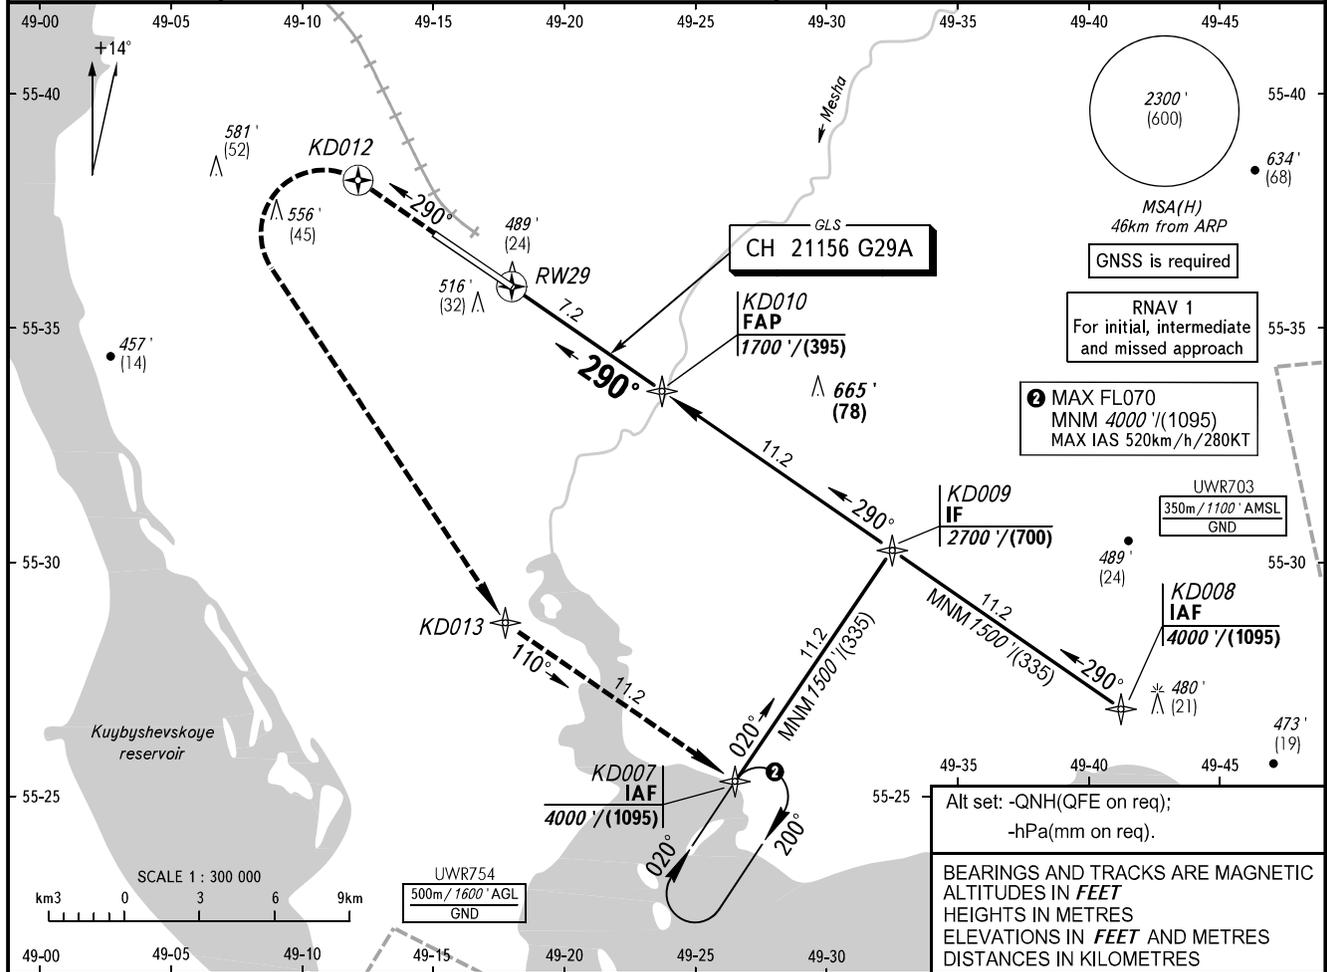

MISSED APPROACH

Climb on track 290° to KD012, turn LEFT to KD013, then to KD007 climbing to 4000'/(1095) or above, then proceed to holding area or according to chart or as instructed by ATC.

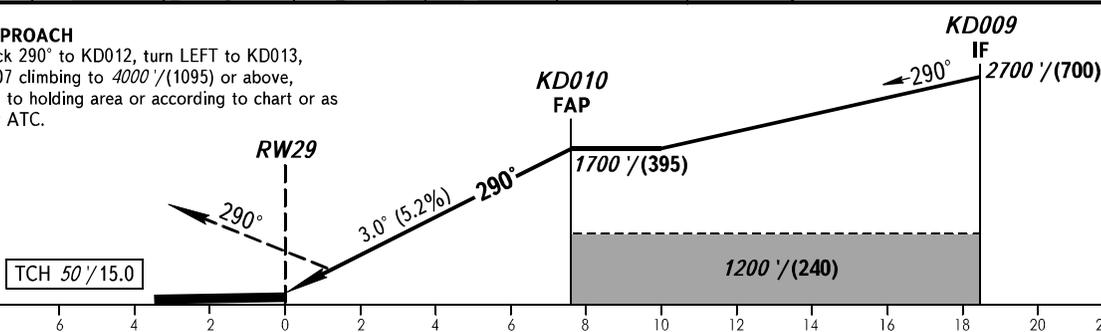

OCA(H)		A	B	C	D							
Straight-in	CAT I	620' (210') (65)	630' (220') (68)	640' (230') (71)	650' (240') (74)							
	Approach											
Circling		820' (410') (125)	910' (500') (155)	1010' (600') (185)	1100' (690') (215)							
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
	kt	80	100	110	130	145	160	180	195	210	225	240
RATE OF DESCENT	m/s	2.2	2.6	3.1	3.5	3.9	4.4	4.8	5.2	5.7	6.1	6.5
	ft/min	430	516	602	688	774	860	946	1032	1118	1204	1290

① **TRANSITION LEVEL:**

- FL050 when QNH is 1013 hPa (760mm mercury column) or above;
- FL060 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL070 when QNH is less than 977 hPa (733mm mercury column).

NOTE

Visual manoeuvring to the north of the AD is PROHIBITED.

