

|                           |                        |                             |                                           |
|---------------------------|------------------------|-----------------------------|-------------------------------------------|
| LOC I-RIW<br><b>110.5</b> | APP CRS<br><b>284°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8204</b><br><b>5459</b><br><b>5516</b> |
|---------------------------|------------------------|-----------------------------|-------------------------------------------|


# ILS or LOC RWY 28

CENTRAL WYOMING RGNL (RIW)


**NA** When local altimeter setting not received, use Lander altimeter setting: increase DA to 5713 feet; increase all MDA 60 feet and S-LOC 28 Cat C and D visibility ¼ mile. For inop MALSRL, when using Lander altimeter setting, increase S-ILS 28 all Cats visibility to ¾ mile and S-LOC 28 Cat C and D visibility to 1 ½ mile. VDP NA when using Lander altimeter setting.

**MALSRL** MISSED APPROACH: Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold, continue climb-in-hold to 7700.


|                               |                                                |                                      |
|-------------------------------|------------------------------------------------|--------------------------------------|
| <b>ASOS</b><br><b>121.425</b> | <b>SALT LAKE CENTER</b><br><b>133.25 285.6</b> | <b>UNICOM</b><br><b>122.8 (CTAF)</b> |
|-------------------------------|------------------------------------------------|--------------------------------------|

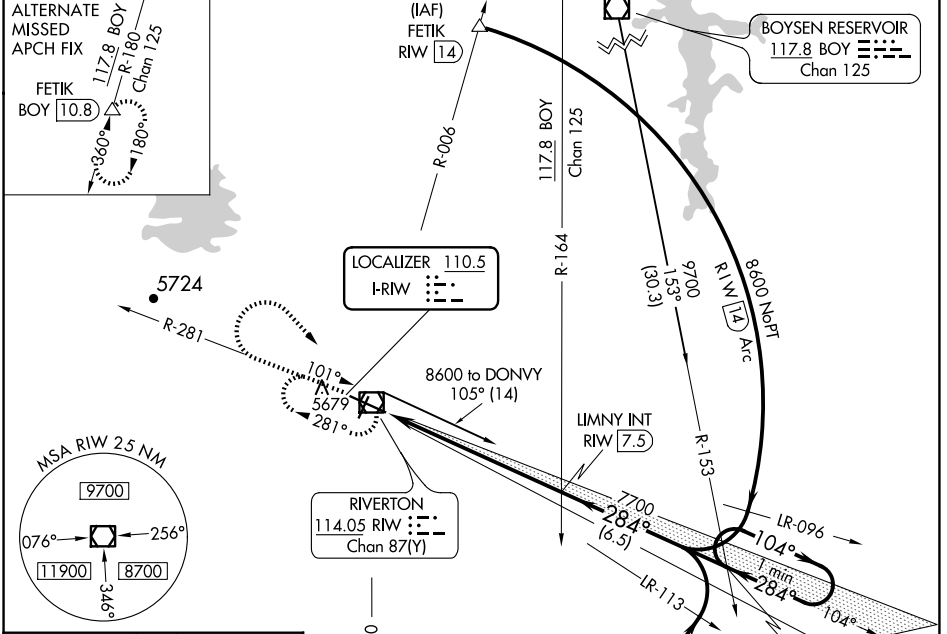

|           |          |           |
|-----------|----------|-----------|
| ELEV 5516 | <b>D</b> | TDZE 5459 |
|-----------|----------|-----------|



|                       |               |                |      |      |      |
|-----------------------|---------------|----------------|------|------|------|
| REIL Rwy 1, 10 and 19 | MIRL Rwy 1-19 | HIRL Rwy 10-28 |      |      |      |
| FAF to MAP 6.9 NM     |               |                |      |      |      |
| Knots                 | 60            | 90             | 120  | 150  | 180  |
| Min:Sec               | 6:54          | 4:36           | 3:27 | 2:46 | 2:18 |

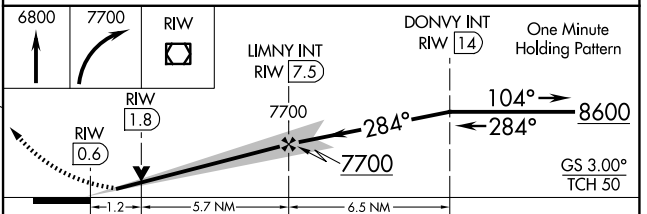

| CATEGORY          | A                  | B                    | C                  | D |
|-------------------|--------------------|----------------------|--------------------|---|
| S-ILS 28          | 5659-½ 200 (200-½) |                      |                    |   |
| S-LOC 28          | 5880-½ 421 (400-½) | 5880-¾ 421 (400-¾)   |                    |   |
| <b>C</b> CIRCLING | 6000-1 484 (500-1) | 6000-1½ 484 (500-1½) | 6120-2 604 (700-2) |   |

NW-1, 20 MAR 2025 to 17 APR 2025

NW-1, 20 MAR 2025 to 17 APR 2025