

STANDARD DEPARTURE CHART - INSTRUMENT

D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
VAR2° W 118.45(130.35)(W)

ZGSZ SHENZHEN/Boao
RNP RWY34



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

Zhuhai APP01 120.35(125.525)
APP02 119.55(119.775)
APP03 123.85(119.775)
APP04 119.025(125.525)
APP05 127.95(119.775)

TL 3600(QNH <980hPa)
3300(QNH ≥980hPa)
TA 2700



RNP1
GNSS

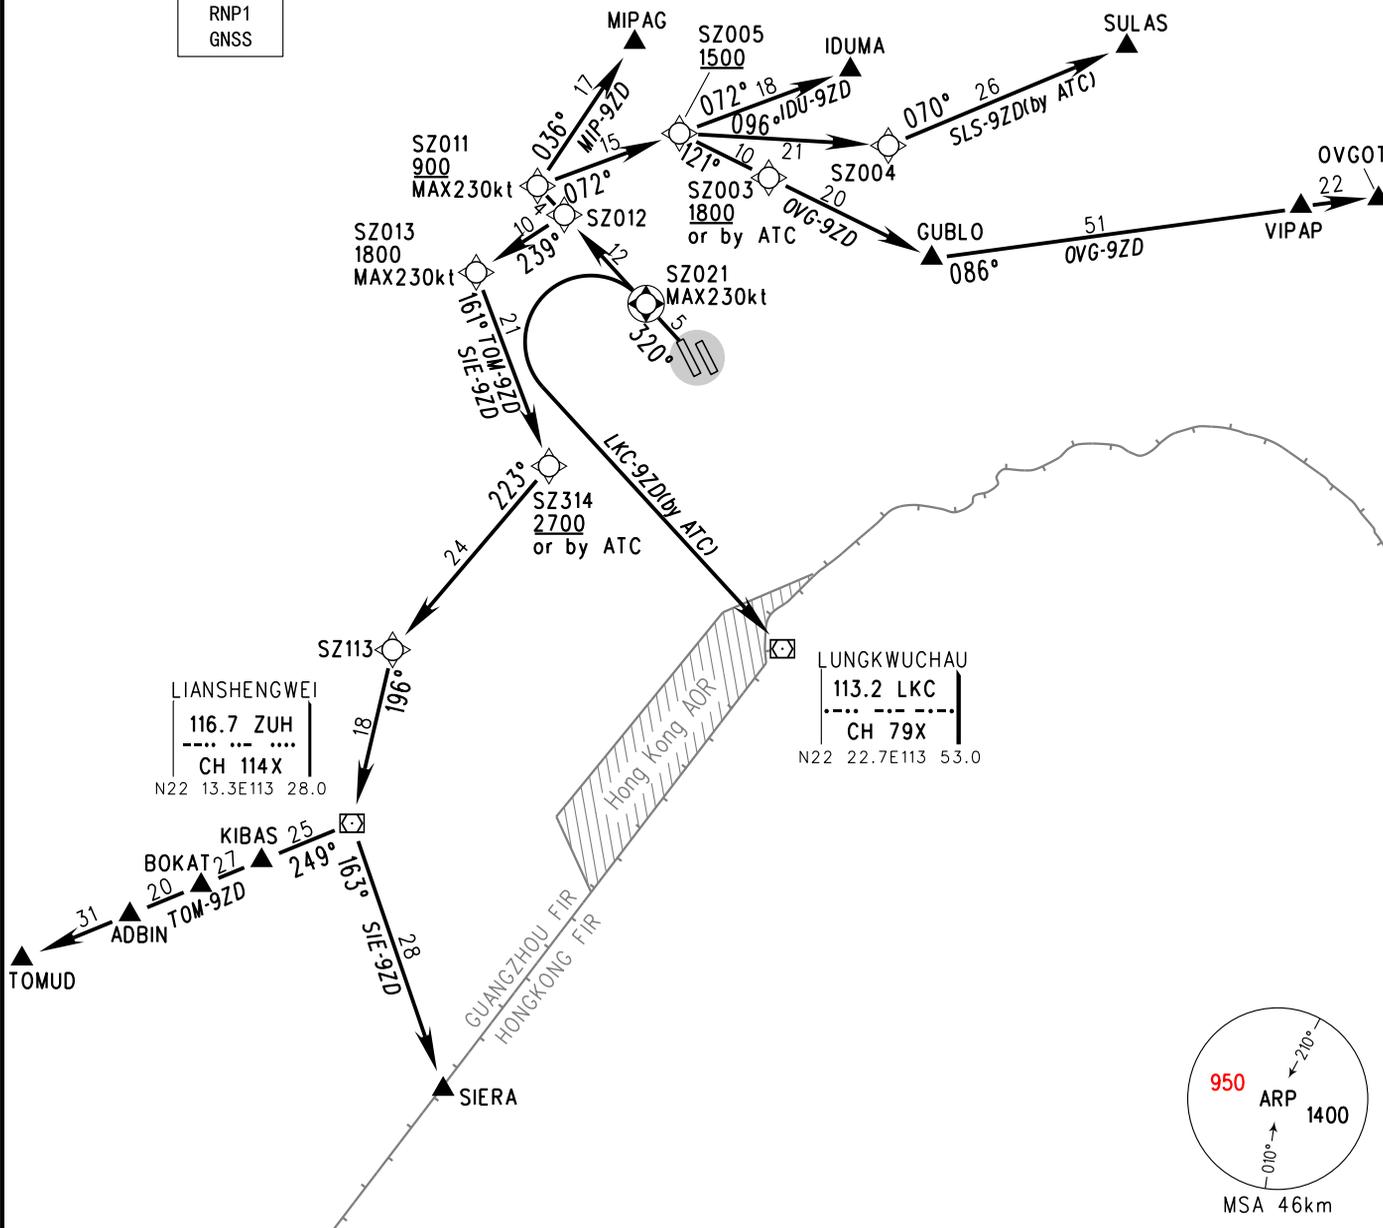

Note: 1. When two RWYs used for independent departure,
IDU-9ZD, OVG-9ZD, SLS-9ZD, MIP-9ZD need ATC clearance.
2. Turning is forbidden until DER.

Changes: MSA