


STANDARD DEPARTURE CHART - INSTRUMENT

RJFK / KAGOSHIMA

RNAV SID and TRANSITION

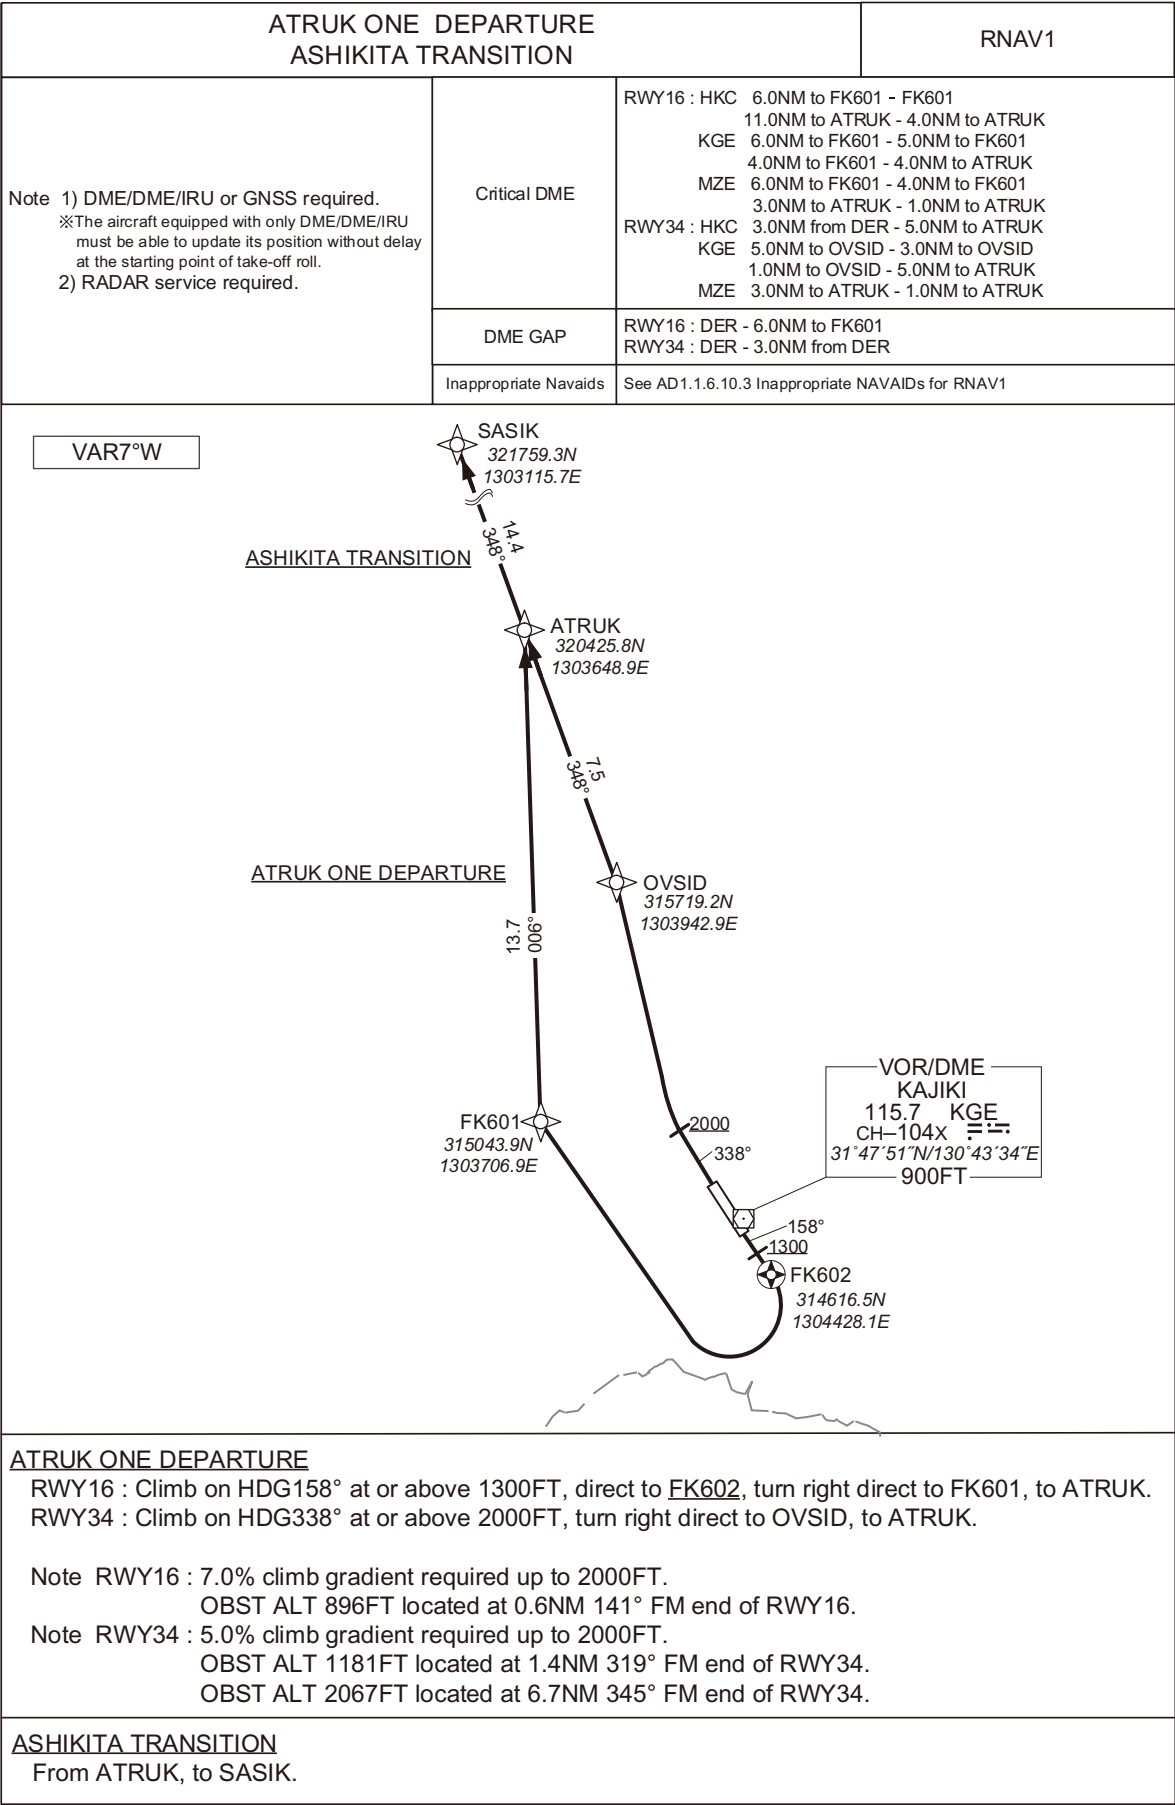

STANDARD DEPARTURE CHART - INSTRUMENT

RJFK / KAGOSHIMA RNAV SID and TRANSITION

ATRUK ONE DEPARTURE

RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.1)	-7.4	-	-	+1300	-	-	RNAV1
002	DF	FK602	Y	-	-7.4	-	-	-	-	-	RNAV1
003	DF	FK601	-	-	-7.4	-	R	-	-	-	RNAV1
004	TF	ATRUK	-	006 (358.9)	-7.4	13.7	-	-	-	-	RNAV1

RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.1)	-7.4	-	-	+2000	-	-	RNAV1
002	DF	OVSID	-	-	-7.4	-	R	-	-	-	RNAV1
003	TF	ATRUK	-	348 (340.9)	-7.4	7.5	-	-	-	-	RNAV1

ASHIKITA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ATRUK	-	-	-7.4	-	-	-	-	-	RNAV1
002	TF	SASIK	-	348 (340.9)	-7.4	14.4	-	-	-	-	RNAV1

CHANGE : New PROC.