

STANDARD ARRIVAL CHART -INSTRUMENT


RJAH / HYAKURI

RNAV STAR

TATSU ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

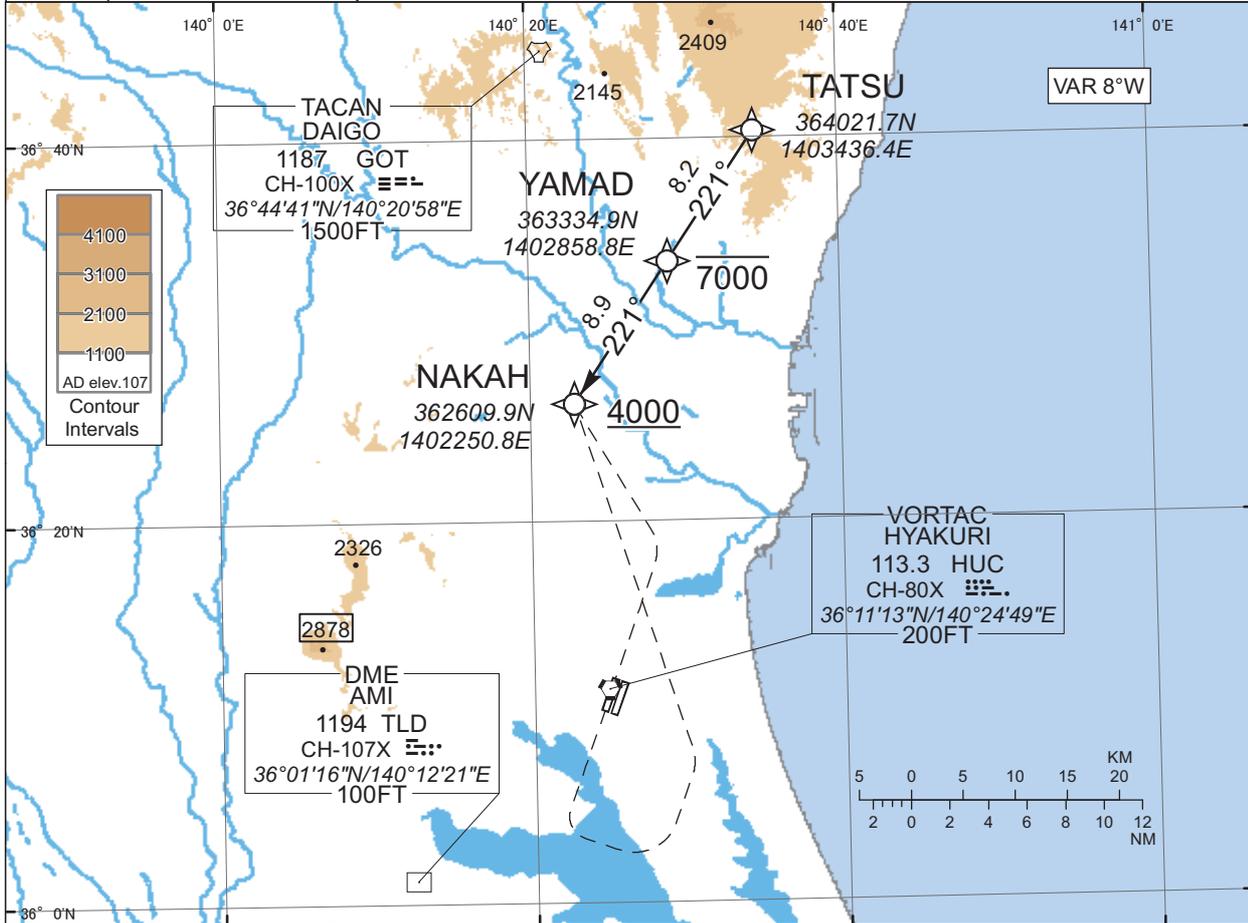

From TATSU, to YAMAD at or below 7000FT, to NAKAH at or above 4000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TATSU	-	-	-7.8	-	-	-	-	-	RNAV1
002	TF	YAMAD	-	221 (213.7)	-7.8	8.2	-	-7000	-	-	RNAV1
003	TF	NAKAH	-	221 (213.6)	-7.8	8.9	-	+4000	-	-	RNAV1