



**INSTRUMENT
APPROACH
CHART - ICAO**

SHEREMETYEVO RADAR 118.100 120.675 122.700 126.600 135.175
SHEREMETYEVO TOWER 118.700 120.700 131.500

**MOSCOW, RUSSIA
SHEREMETYEVO
ILS CAT I/II/IIIA RWY 06L**

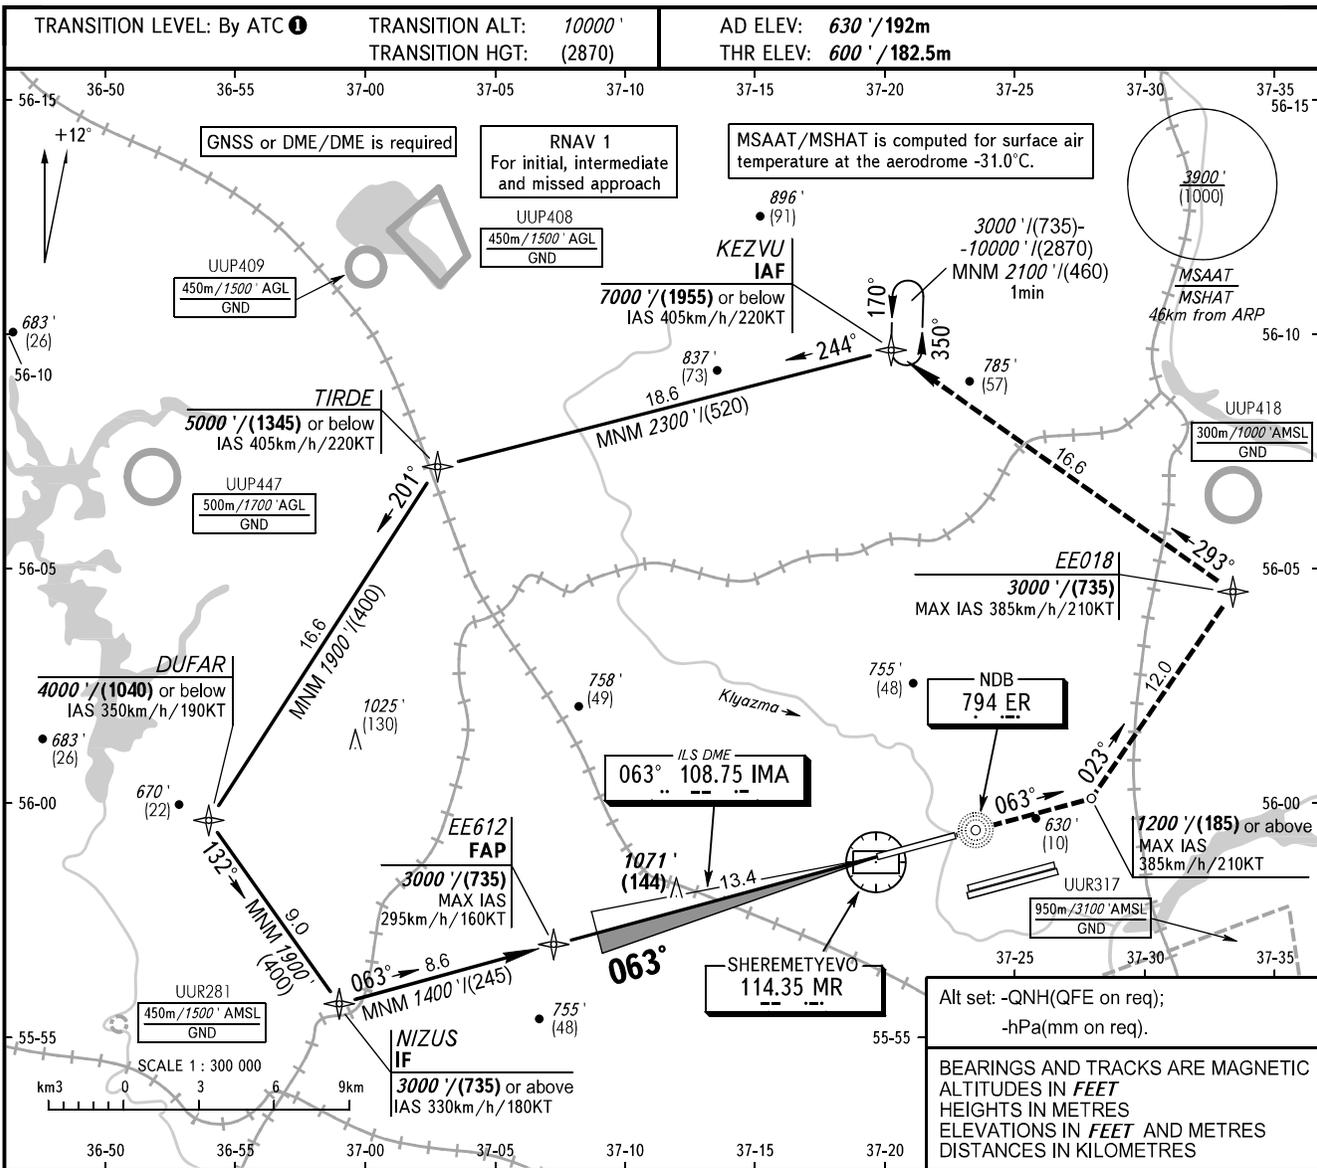

DIST RWY 06L THR	12.0	10.0	8.0	6.0	4.0	2.0
ALTITUDE/HEIGHT	2720' / (650)	2370' / (540)	2030' / (440)	1690' / (335)	1340' / (230)	1000' / (125)

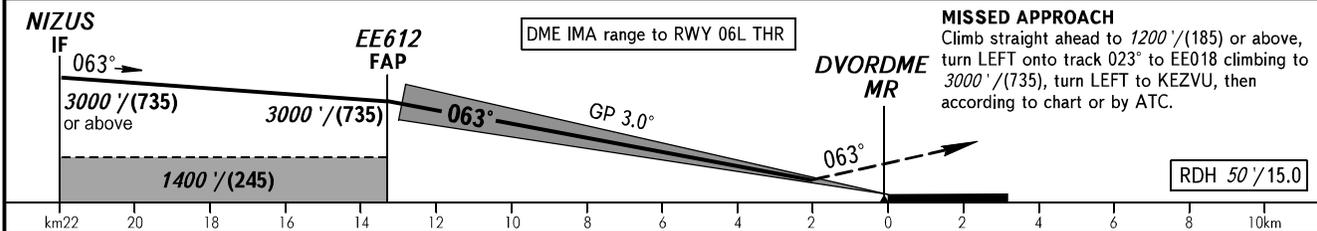

OCA(H)		A	B	C	D	
Straight-in Approach	MNM climb gradient for missed APCH	CAT I	738' (138') (42)	744' (144') (44)	754' (154') (47)	764' (164') (50)
		CAT II	650' (50') (15)	660' (60') (18)	672' (72') (22)	685' (85') (26)
		CAT IIIA	APPROVED			

1 TRANSITION LEVEL:
 - FL110 when QNH is 1013 hPa (760mm mercury column) or above;
 - FL120 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
 - FL130 when QNH is less than 977 hPa (733mm mercury column).

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5
	ft/min	427	512	597	683	768	853	939	1024	1109	1195	1280

CHANGE: OCA(H), UUP447