


INSTRUMENT  
APPROACH  
CHART - ICAO


STAVROPOL, RUSSIA  
SHPAKOVSKOYE  
NDB Z RWY 25

TOWER 120.900

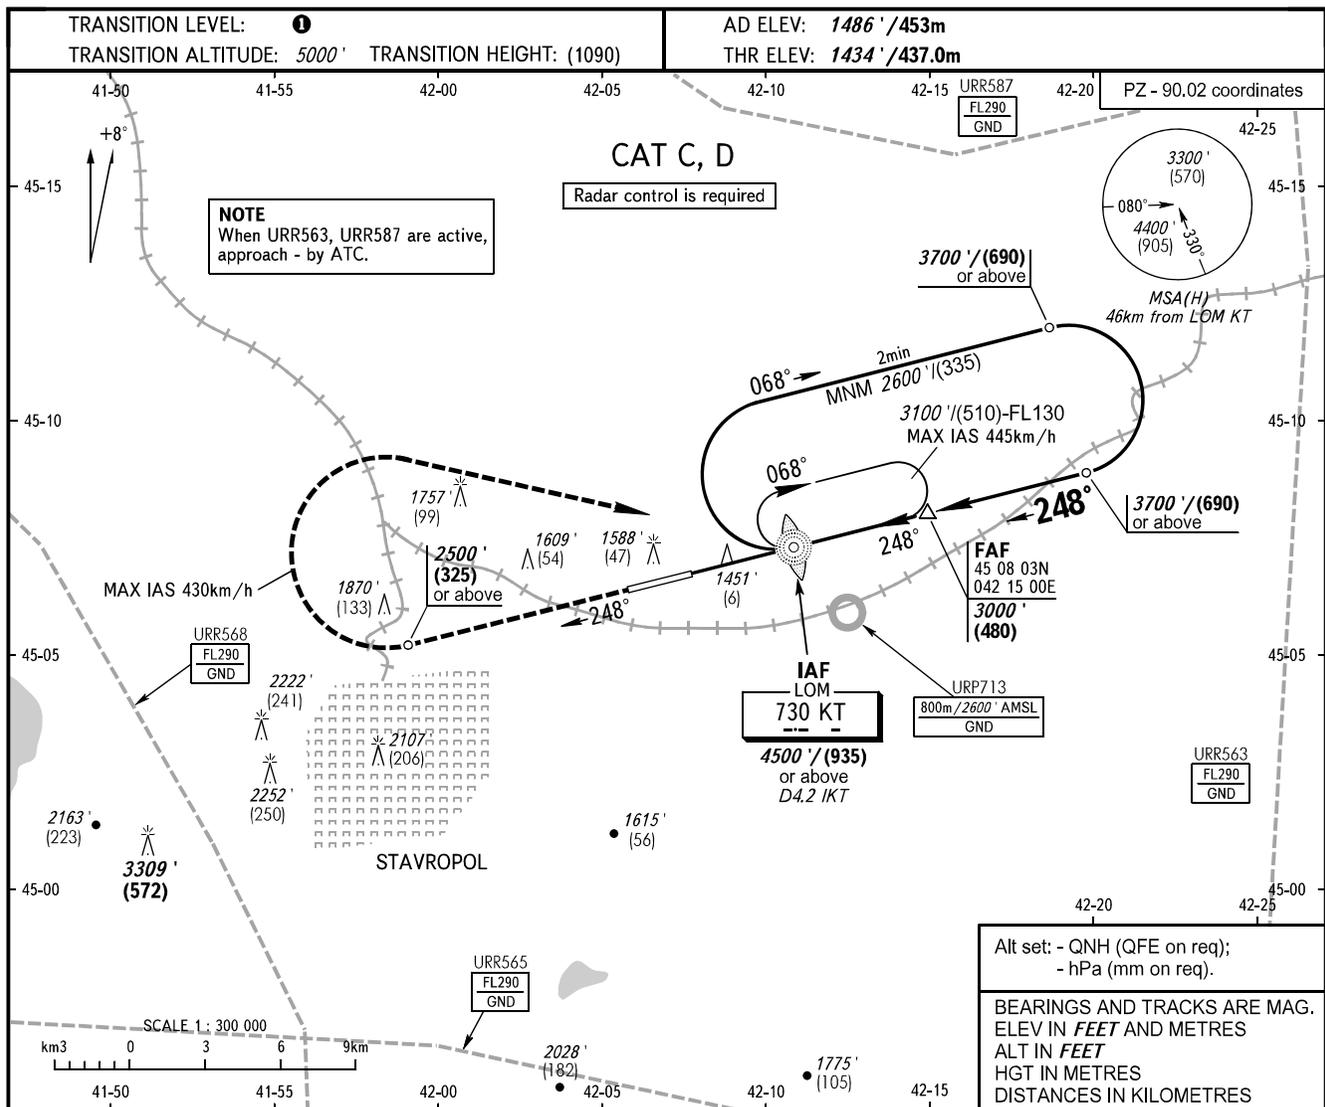

MISSED APPROACH  
Climb on track 248° to 2500'/(325) or above, then turn RIGHT to LOM KT at 4500'/(935) or above, then according to chart.

FAF is fixed by TAR (DIST 11.4).  
MAPt is fixed by TAR (DIST 3.4).

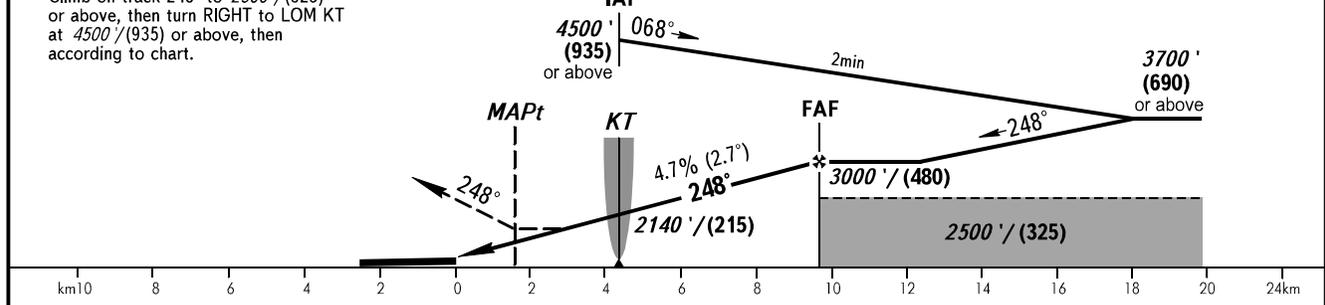

OCA(H)		A	B	C	D	① TRANSITION LEVEL:						
Straight-in Approach				1770' (335') (105)	1770' (335') (105)	- FL060 when QNH is 1013 hPa (760mm mercury column) or above;						
						- FL070 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);						
Circling				2150' (670') (205)	2270' (780') (240)	- FL080 when QNH is less than 977 hPa (733mm mercury column).						
GROUND SPEED		km/h		150	180	210	240	270	300	330	360	390
FAF - MAPt 8000m		min:sec		3:11	2:40	2:17	1:59	1:46	1:35	1:27	1:20	1:13
RATE OF DESCENT		m/s		1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.0
		ft/min		385	463	540	617	694	771	848	925	1002

CHANGE: Limiting bearing line withdrawn, URP713