


TRANSITION ALTITUDE  
8000 ft

ATIS 127.055  
TWR 125.425  
ANDRAVIDA APP 121.125

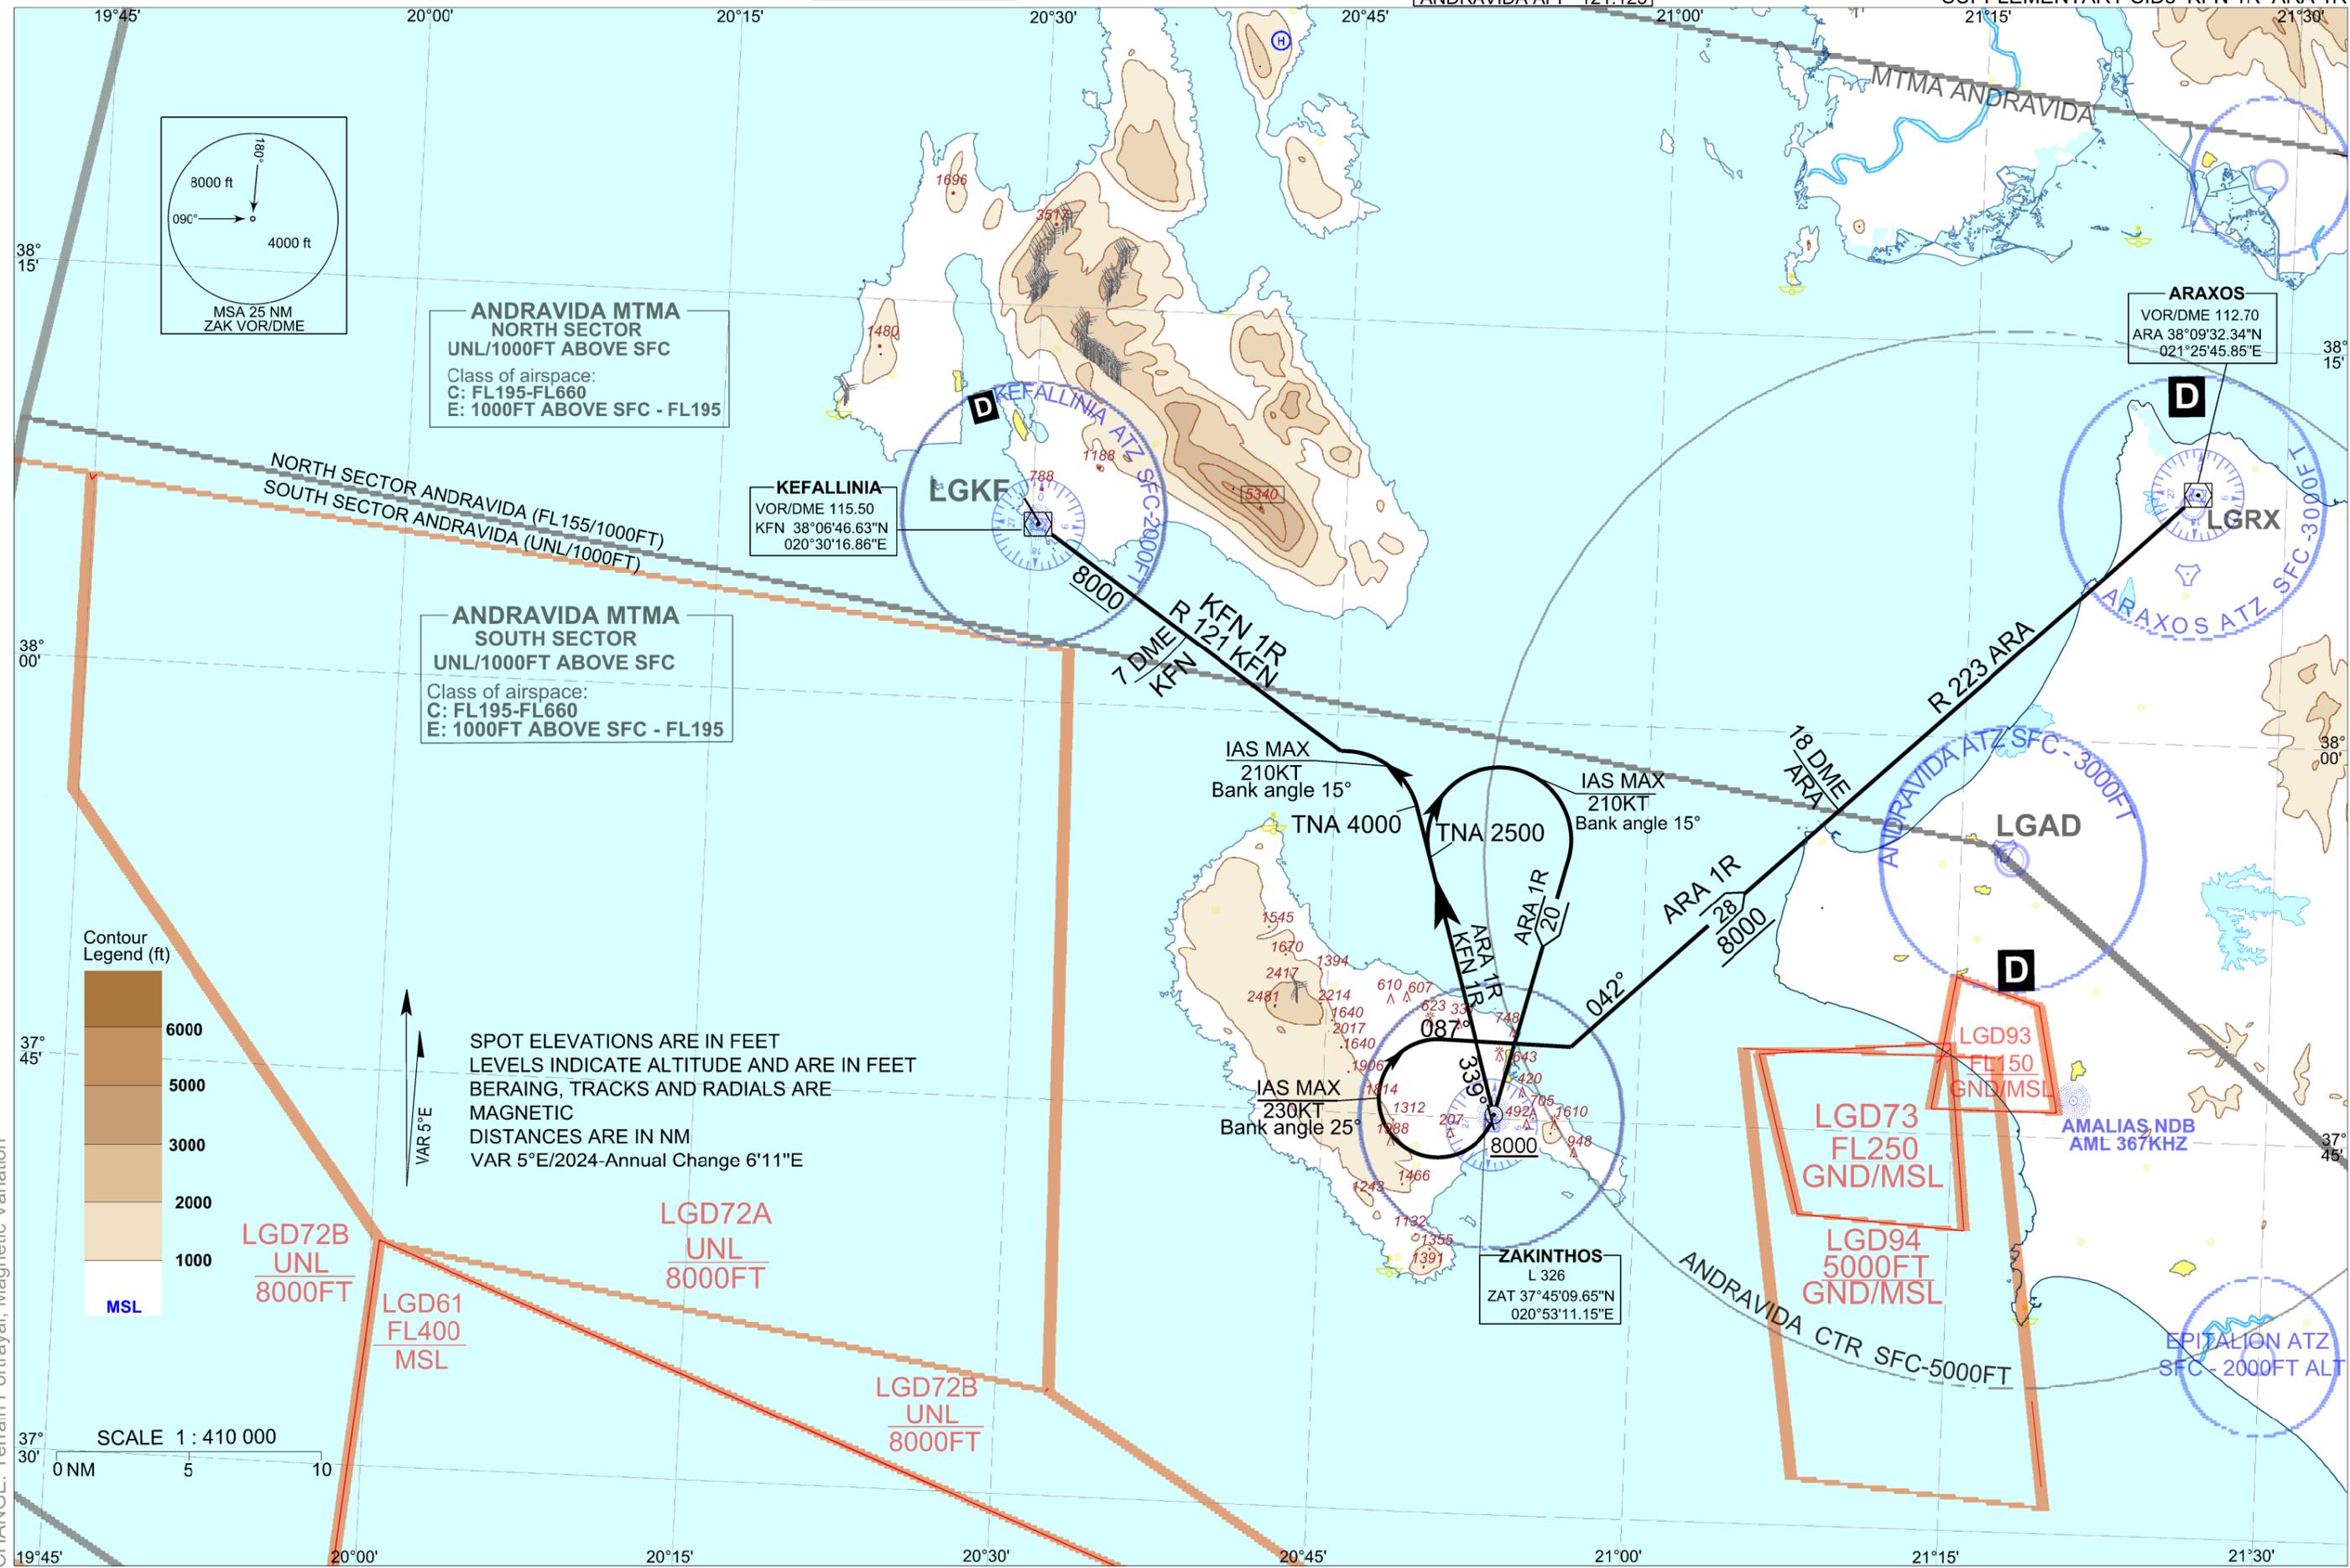

CHANGE: Terrain Portrayal, Magnetic Variation

ZAKINTHOS / DIONISIOS SOLOMOS

SIDs RWY 34

ZAT L/DME

**GENERAL**

1. For these SIDs a visual climb up to 200 FT is required.
2. When for these SIDs an altitude higher than the transition altitude is designated, then the ATC unit shall specify an equivalent Flight Level.

DESIGNATOR	DESCRIPTION	MAX IAS / BANK ANGLE	MINIMUM CLIMB GRADIENT (PDG)	ALTITUDES
<b>KFN 1R</b>	Climb on BEARING 339°. At 4000 FT (QNH) turn left, intercept and follow RADIAL 121 KFN and then to assigned route by ATC unit.	210 KT/15° until the turn 4000 FT (QNH) is completed	6,0% (365 FT/NM) up to 700 FT (QNH) for obstacles and then up to 8000 FT (QNH) for ATC purposes. See NOTE below	Cross RADIAL 121 KFN/7DME Fix at 8000FT (QNH) or above.
<b>ARA 1R</b>	Climb on BEARING 339°. At 2500 FT (QNH) turn right to ZAT, then turn right to track 087°, intercept and follow BEARING 042°, then intercept and follow RADIAL 223 ARA and then to assigned route by ATC unit.	210 KT/15° until the turn 2500 FT (QNH) is completed 230 KT/25° until the turn at ZAT is completed	4,6% (280 FT/NM) up to 700 FT (QNH) for obstacles and then up to 8000 FT (QNH) for ATC purposes. See NOTE below	Cross ZAT at 8000 FT (QNH) or above.

NOTE

PDG	GS (KD)	100	120	140	160	180	200	220	240	260	280
4,6% (280 FT/NM)	ROC (FT/MIN)	466	559	652	745	838	932	1025	1118	1211	1304
6,0% (365 FT/NM)	ROC (FT/MIN)	610	732	854	976	1098	1220	1342	1464	1586	1708