

# EVAN THREE DEPARTURE (RNAV)

**TOP ALTITUDE:**  
4000

**TAKEOFF MINIMUMS:**

Rwys 2C, 2L, 2R, 13, 20C, 20L, 20R, 31: Standard with minimum climb of 500' per NM to 1100.

NOTE: DME/DME/IRU or GPS required.


NOTE: RNAV 1.

NOTE: Radar required.

NOTE: For Turbojet aircraft only.

NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.


NOTE: If unable to accept climb rates, advise ATC on initial contact.



NOTE: Chart not to scale.

SE-1, 20 MAR 2025 to 17 APR 2025

- D-ATIS 135.1
- CLNC DEL 126.05
- CPDLC
- GND CON
- 121.9 348.6
- NASHVILLE TOWER
- 118.6 257.8
- NASHVILLE DEP CON
- 118.4 360.7

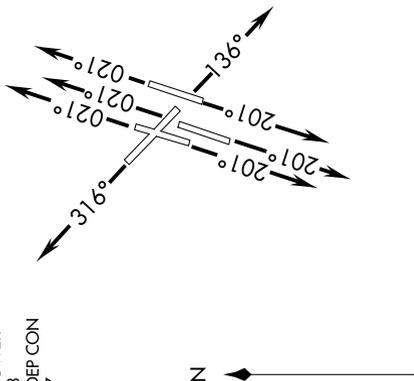

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RWYS 2L/C/R:** Climb heading 021° or assigned ATC heading, thence....

**TAKEOFF RWY 13:** Climb heading 136° or assigned ATC heading, thence....

**TAKEOFF RWYS 20L/C/R:** Climb heading 201° or assigned ATC heading, thence....

**TAKEOFF RWY 31:** Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to CHPPY, then on track 115° to EVVAN. Maintain 4000, expect clearance to filed altitude within five (5) minutes after departure.

SE-1, 20 MAR 2025 to 17 APR 2025

# EVAN THREE DEPARTURE (RNAV)