



INSTRUMENT APPROACH CHART

RJCW / WAKKANAI

RNP RWY26(AR)

TOKYO CONTROL 132.6 - 255.2 134.25 - 260.4	RNP AR RF required.	WAKKANAI RADIO 118.3 - 126.2	NO RADAR
--	------------------------	---------------------------------	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -25°C / above 45°C

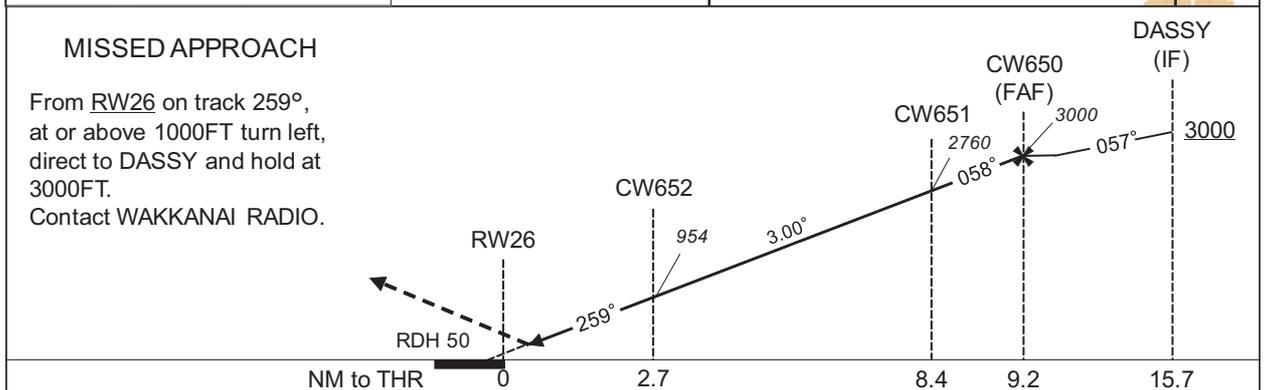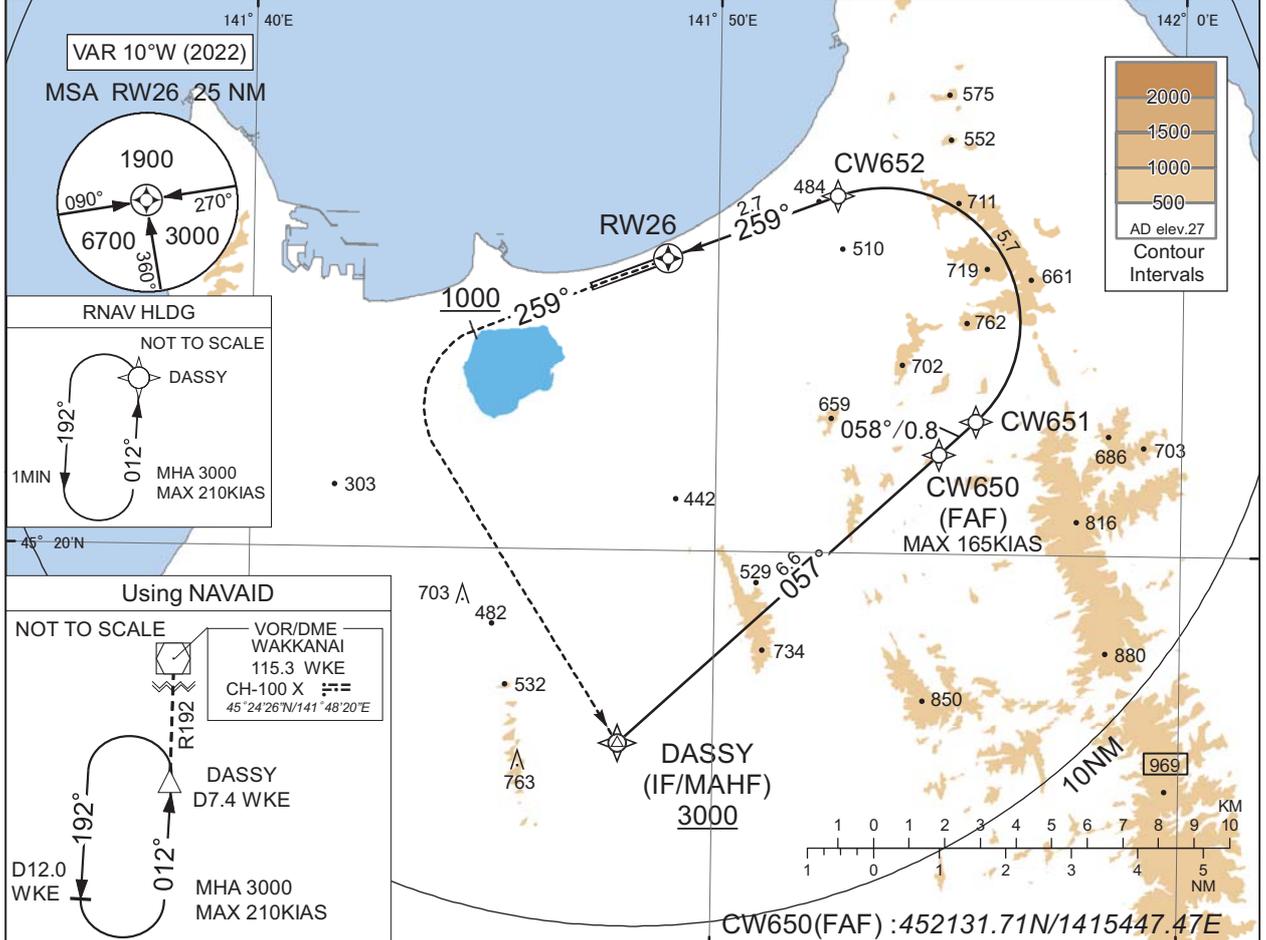

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 31	AD elev. 27
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	331(300)	1400
D		1600

Authorization Required

CHANGE : ATC call sign.

MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJCW / WAKKANAI

RNP RWY26(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	DASSY	-	-	-10.5	-	-	+3000	-	-	-
002	TF	CW650	-	057 (047.0)	-10.5	6.6	-	3000	-165	-	1.0
003	TF	CW651	-	058 (047.1)	-10.5	0.8	-	2760	-	-3.00	0.3
004	RF Center: CWRF2 r=2.05NM	CW652	-	-	-10.5	5.7	L	954	-	-3.00	0.3
005	TF	RW26	Y	259 (248.9)	-10.5	2.7	-	81	-	-3.00/50	0.3
006	FA	-	-	259 (248.9)	-10.5	-	-	+1000	-	-	1.0
007	DF	DASSY	-	-	-10.5	-	L	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	DASSY	012 (002.0)	-10.5	1.0 (-14000)	L	3000	FL140	-210 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
CW650	452131.71N / 1415447.47E	CWRF2	452332.87N / 1415335.73E
CW651	452202.42N / 1415534.54E		
CW652	452527.92N / 1415232.94E		
RW26	452428.77N / 1414854.78E		
DASSY	451703.92N / 1414757.93E		

CHANGE : PROC renamed.