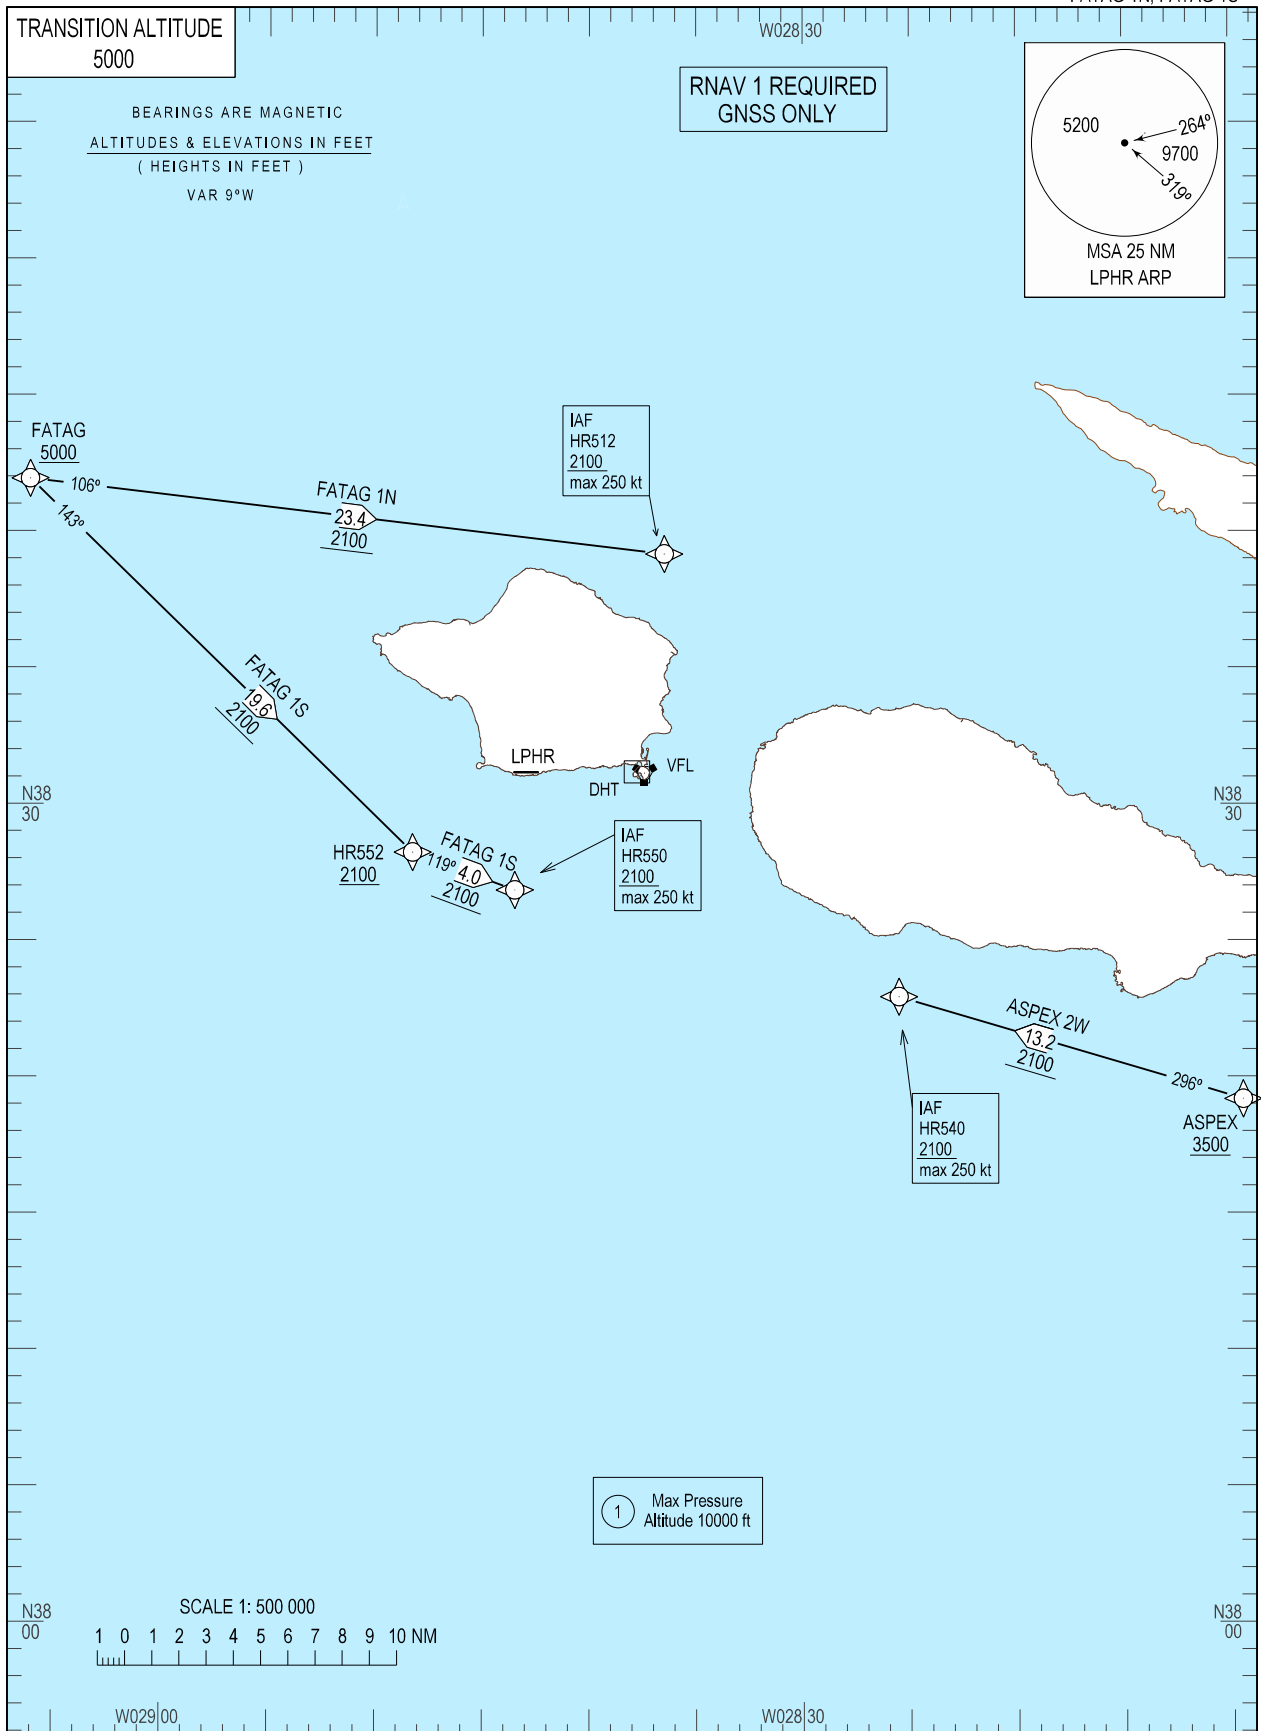


STANDARD ARRIVAL CHART -
INSTRUMENT (STAR) - ICAOSANTA MARIA RADAR 132.150
HORTA APPROACH 120.600
HORTA TOWER 118.000HORTA (LPHR)
RNAV RWY28
ASPEX 2W
FATAG 1N, FATAG 1S

WPT HR458 replaced by FATAG. Procedure designation changed.

HORTA STAR RNAV FATAG 1N (RWY28)									
Path Terminator	Waypoint			Course/Track MAG (True)	Dist NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed	
IF	FATAG	-	384156.09N 0290612.17W	-	-	-	+5000 ft	250 kt	RNAV 1
TF	HR512	-	383911.65N 0283629.29W	106 (096.6)	23.4	-	+2100 ft	250 kt	RNAV 1

HORTA STAR RNAV FATAG 1S (RWY28)									
Path Terminator	Waypoint			Course/Track MAG (True)	Dist NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed	
IF	FATAG	-	384156.09N 0290612.17W	-	-	-	+5000 ft	250 kt	RNAV 1
TF	HR552	-	382815.42N 0284815.32W	143 (134.1)	19.6	-	+2100 ft	250 kt	RNAV 1
TF	HR550	-	382652.40N 0284328.60W	119 (110.2)	4.0	Left	+2100 ft	250 kt	RNAV 1

HORTA STAR RNAV ASPEX 2W (RWY28)									
Path Terminator	Waypoint			Course/Track MAG (True)	Dist NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed	
IF	ASPEX	-	381910.64N 0280928.77W	-	-	-	+3500 ft	250 kt	RNAV 1
TF	HR540	-	382256.99N 0282531.75W	296 (286.7)	13.2	-	+2100 ft	250 kt	RNAV 1