

STANDARD DEPARTURE CHART-INSTRUMENT

RJFT / KUMAMOTO RNAV TRANSITION

SPIDE TRANSITION / SALTY TRANSITION

RNAV 1

Note 1) DME/DME/IRU or GNSS required
2) RADAR service required

Critical DME

—


DME GAP

—

Inappropriate Navaids

See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8° W

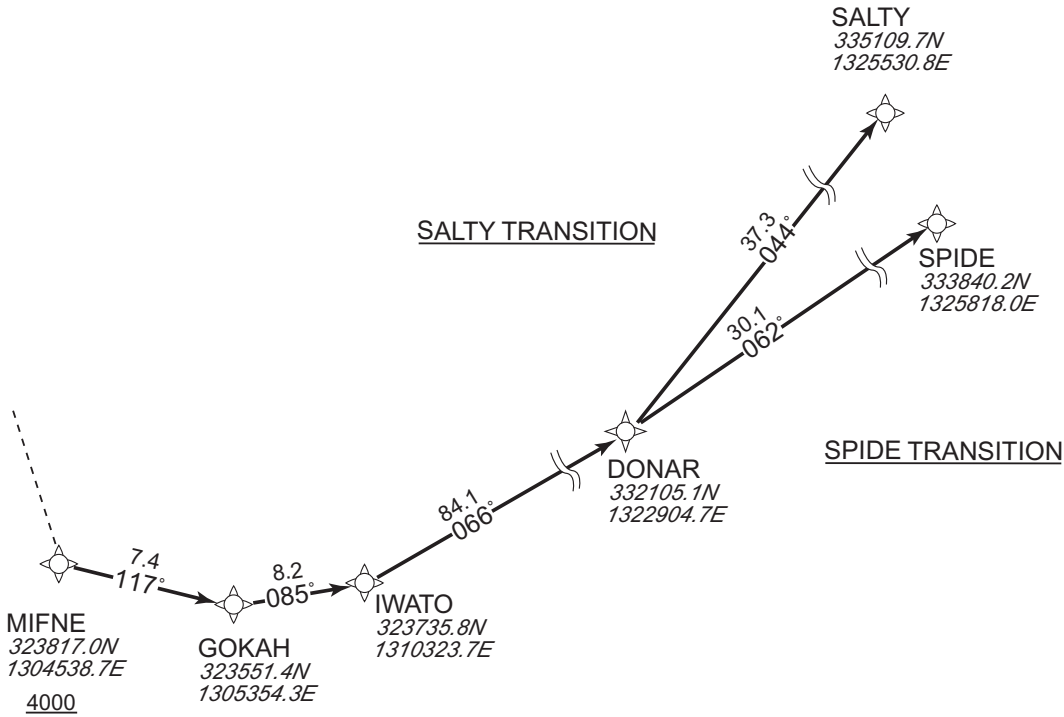

CHANGE : VAR. PROC course.

SPIDE TRANSITION

From MIFNE at or above 4000FT, to GOKAH, to IWATO, to DONAR, to SPIDE.

SALTY TRANSITION

From MIFNE at or above 4000FT, to GOKAH, to IWATO, to DONAR, to SALTY.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFT / KUMAMOTO

RNAV TRANSITION

SPIDE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIFNE	-	-	-7.6	-	-	+4000	-	-	RNAV1
002	TF	GOKAH	-	117 (109.2)	-7.6	7.4	-	-	-	-	RNAV1
003	TF	IWATO	-	085 (077.7)	-7.6	8.2	-	-	-	-	RNAV1
004	TF	DONAR	-	066 (058.4)	-7.6	84.1	-	-	-	-	RNAV1
005	TF	SPIDE	-	062 (054.1)	-7.6	30.1	-	-	-	-	RNAV1

SALTY TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIFNE	-	-	-7.6	-	-	+4000	-	-	RNAV1
002	TF	GOKAH	-	117 (109.2)	-7.6	7.4	-	-	-	-	RNAV1
003	TF	IWATO	-	085 (077.7)	-7.6	8.2	-	-	-	-	RNAV1
004	TF	DONAR	-	066 (058.4)	-7.6	84.1	-	-	-	-	RNAV1
005	TF	SALTY	-	044 (036.1)	-7.6	37.3	-	-	-	-	RNAV1

CHANGE : VAR. PROC course.