



INSTRUMENT APPROACH CHART

RJOB / OKAYAMA

RNP Z RWY07(AR)

KANSAI APP 121.2 - 120.4 - 261.2	RNP AR RF required.	OKAYAMA TOWER 124.3 - 126.2	RADAR AVBL
-------------------------------------	------------------------	--------------------------------	------------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

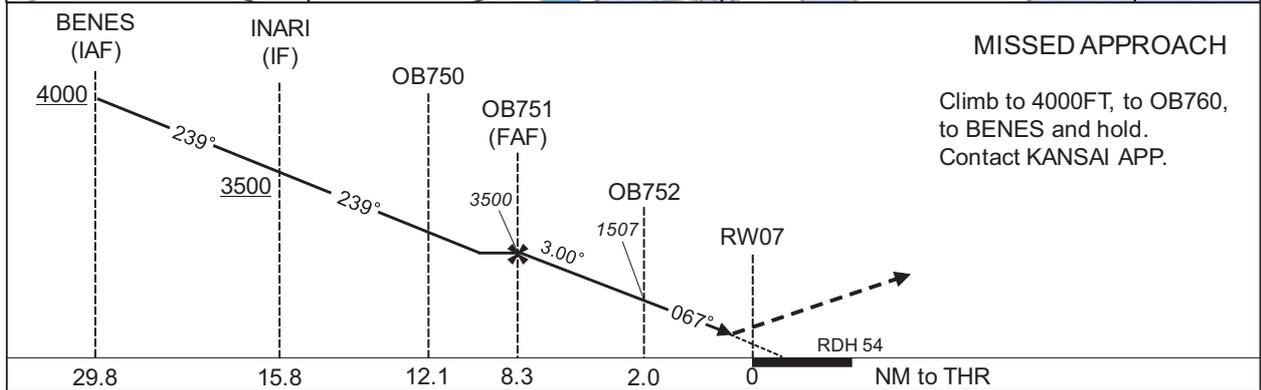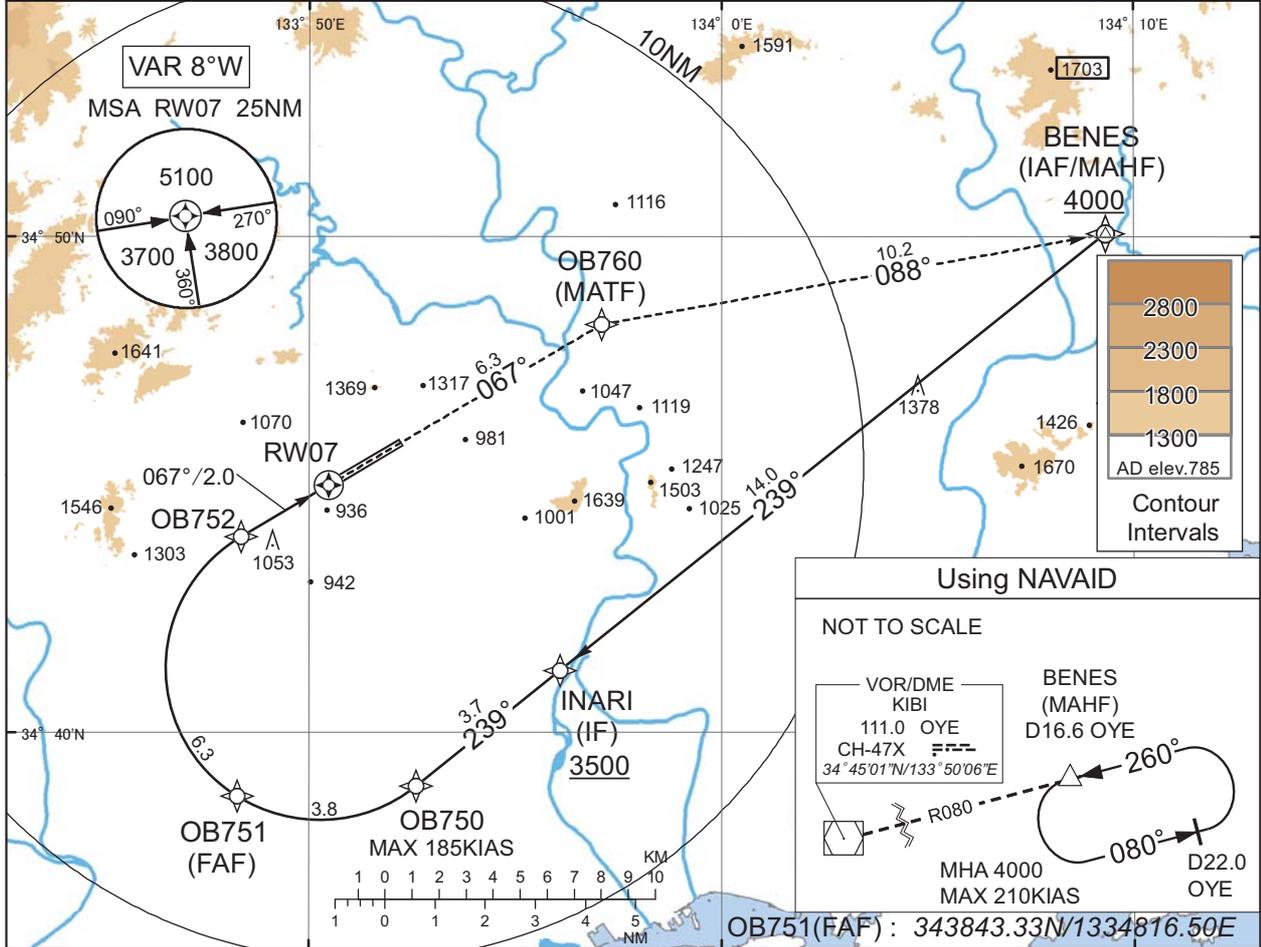

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 806	AD elev. 785
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	1233(427)	1000
D	-	1400

Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJOB / OKAYAMA

RNP Z RWY07(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	BENES	-	-	-8.1	-	-	+4000	-	-	-
002	TF	INARI	-	239 (231.0)	-8.1	14.0	-	+3500	-	-	1.0
003	TF	OB750	-	239 (230.9)	-8.1	3.7	-	-	-185	-	1.0
004	RF Center: OBRF1 r=3.07NM	OB751	-	-	-8.1	3.8	R	3500	-	-	1.0
005	RF Center: OBRF1 r=3.07NM	OB752	-	-	-8.1	6.3	R	1507	-	-3.00	0.3
006	TF	RW07	Y	067 (059.1)	-8.1	2.0	-	860	-	-3.00/54	0.3
007	TF	OB760	-	067 (059.1)	-8.1	6.3	-	-	-	-	1.0
008	TF	BENES	-	088 (079.6)	-8.1	10.2	-	4000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
INARI	344115.72N / 1335605.70E	OBRF1	344119.08N / 1335015.95E
OB750	343855.80N / 1335236.42E		
OB751	343843.33N / 1334816.50E		
OB752	344357.48N / 1334821.64E		
RW07	344500.07N / 1335028.89E		
OB760	344814.99N / 1335705.97E		
BENES	345004.35N / 1340919.47E		

CHANGE : PROC renamed.