
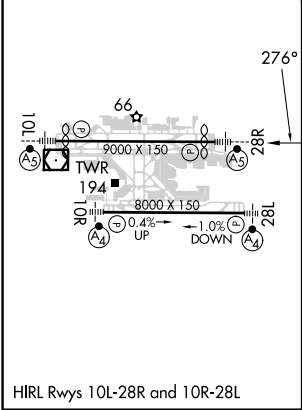


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 8394 |
| 276°    | TDZE     | 7    |
|         | Apt Elev | 65   |

RNAV (RNP) Z RWY 28R  
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

|                                                                                                                                                                                                                                                      |           |                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------|
| RNP AR APCH - GPS. RADAR required.<br>Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 7°C or above 54°C. For inop ALS, increase RNP 0.15 visibility to RVR 5500 and increase RNP 0.30 visibility to 1¾ SM. | MALSR<br> | MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct HUKUK and hold, continue climb-in-hold to 4000. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------|

|                 |                                |                                      |                  |                   |       |
|-----------------|--------------------------------|--------------------------------------|------------------|-------------------|-------|
| D-ATIS<br>135.0 | MIAMI APP CON<br>133.775 285.6 | FORT LAUDERDALE TOWER<br>119.3 257.8 | GND CON<br>121.4 | CLNC DEL<br>128.4 | CPDLC |
|-----------------|--------------------------------|--------------------------------------|------------------|-------------------|-------|

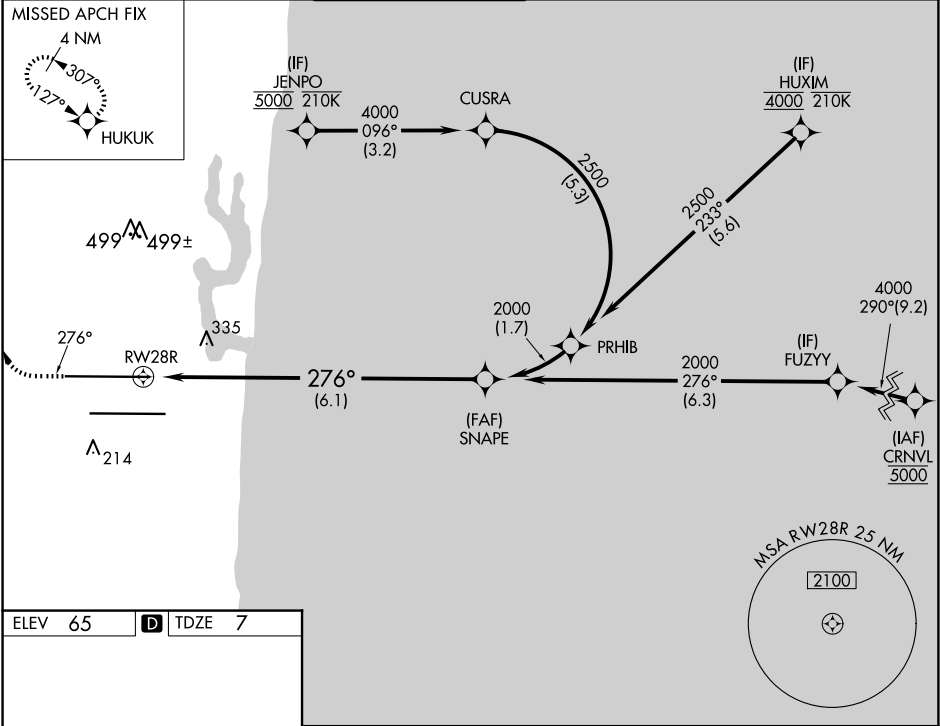

|                                         |        |       |                                                                     |   |
|-----------------------------------------|--------|-------|---------------------------------------------------------------------|---|
| 800                                     | 4000   | HUKUK | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 69). |   |
|                                         |        |       |                                                                     |   |
| See planview for multiple IF locations. |        |       |                                                                     |   |
|                                         |        |       |                                                                     |   |
| CATEGORY                                | A      | B     | C                                                                   | D |
| RNP 0.15 DA                             | 362/40 |       | 355 (300-¾)                                                         |   |
| RNP 0.30 DA                             | 618-1⅓ |       | 611 (600-1⅓)                                                        |   |
| AUTHORIZATION REQUIRED                  |        |       |                                                                     |   |