


ATC SURVEILLANCE MINIMUM  
ALTITUDE CHART - ICAO

ELEV  
281 / 86m

TRANSITION ALTITUDE: 3500'

ROSTOV-NA-DONU, RUSSIA

PLATOV

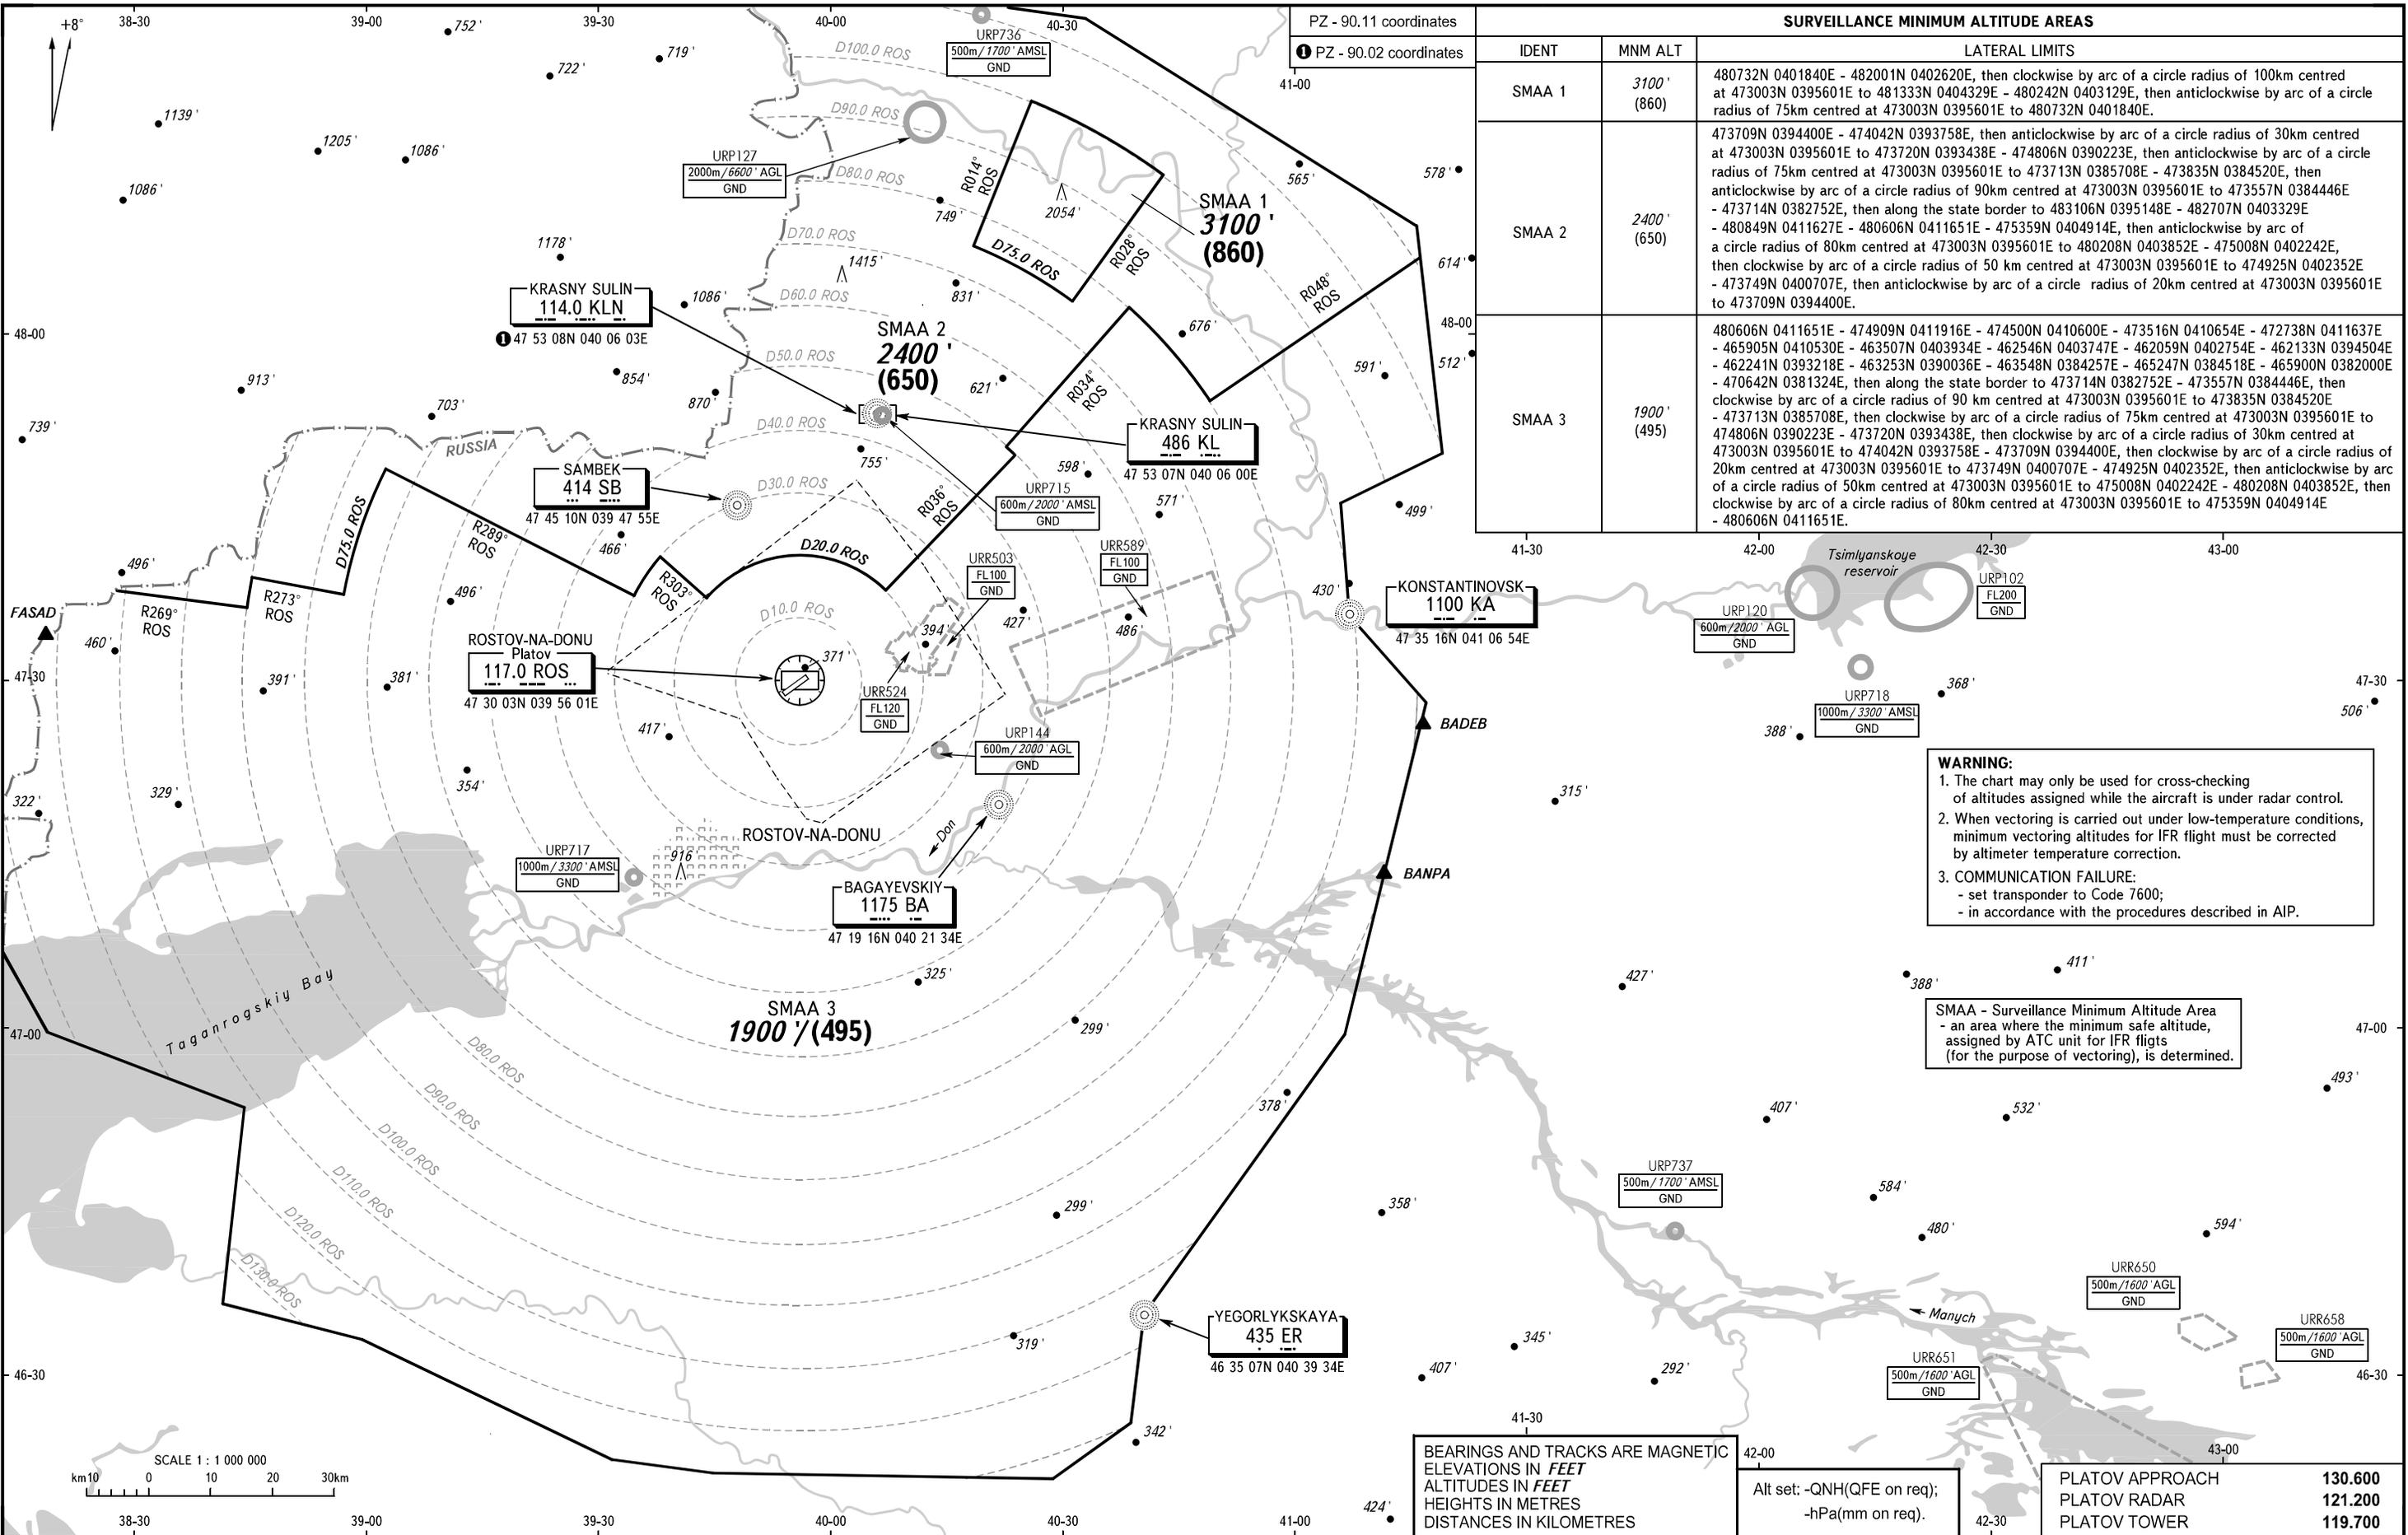

**WARNING:**

- The chart may only be used for cross-checking of altitudes assigned while the aircraft is under radar control.
- When vectoring is carried out under low-temperature conditions, minimum vectoring altitudes for IFR flight must be corrected by altimeter temperature correction.
- COMMUNICATION FAILURE:
  - set transponder to Code 7600;
  - in accordance with the procedures described in AIP.

SMAA - Surveillance Minimum Altitude Area - an area where the minimum safe altitude, assigned by ATC unit for IFR flights (for the purpose of vectoring), is determined.

BEARINGS AND TRACKS ARE MAGNETIC  
ELEVATIONS IN FEET  
ALTITUDES IN FEET  
HEIGHTS IN METRES  
DISTANCES IN KILOMETRES

Alt set: -QNH(QFE on req);  
-hPa(mm on req).

PLATOV APPROACH 130.600  
PLATOV RADAR 121.200  
PLATOV TOWER 119.700