

LOC F-MWH <u>109.5</u>	APP CRS 324°	Rwy Idg 13492 TDZE 1167 Apt Elev 1189
----------------------------------	------------------------	--

ILS or LOC RWY 32R
GRANT COUNTY INTL (MWH)

T When local altimeter setting not received, use Ephrata altimeter setting; increase all DA/MDA 40 feet and Circling Cat D visibility $\frac{1}{4}$ SM.
A For inop MALSR, increase S-LOC 32R Cat D visibility to RVR 5000.
 *RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Ephrata altimeter setting.


MALSR



MISSED APPROACH: Climb to 1800, then climbing right turn to 4000 on MWH R-054 to BATUM INT/MWH 9.8 DME and hold, continue climb-in-hold to 4000.

ATIS 119.05	GRANT COUNTY APP CON ★ 126.4 379.95	GRANT COUNTY TOWER ★ 118.25 (CTAF) 0 257.8 (EAST) 128.0 257.8 (WEST)	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

ADF OR DME
REQUIRED

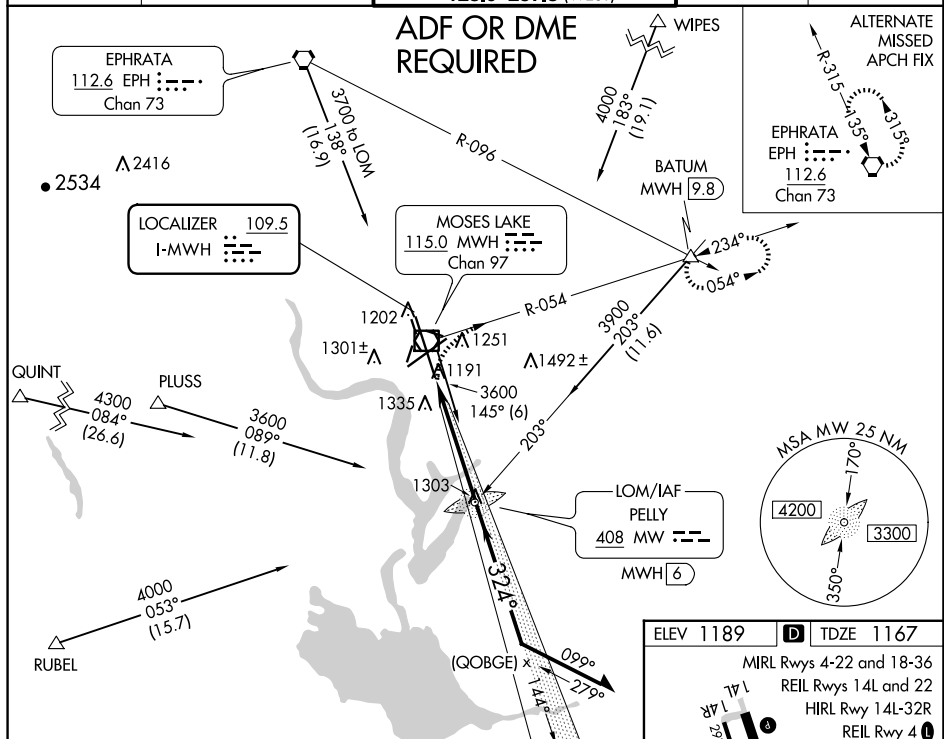

1800 ↑	4000 ↻ MWH R-054	BATUM △	MW LOM PELLEY MWH 6	VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 76). Remain within 10 NM
CATEGORY	A	B	C	D
S-ILS 32R*	1367/24 200 (200-½)			
S-LOC 32R	1440/24 273 (300-½)			1440/40 273 (300-¾)
CIRCLING	1680-1 491 (500-1)	1680-1½ 491 (500-1½)	1820-2 631 (700-2)	

