
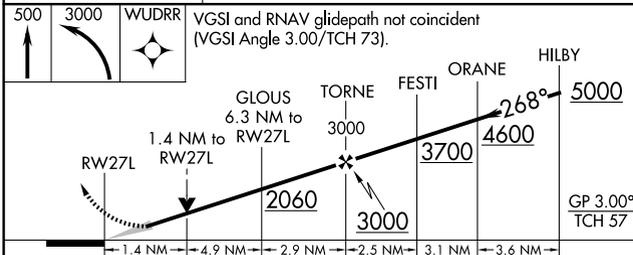



WAAS CH 97322	APP CRS 268°	Rwy Idg TDZE Apt Elev	9912 10 36
-------------------------	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 27L

PHILADELPHIA INTL (PHL)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct WUDRR and hold.		
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		AS			
D-ATIS ARR 133.4 DEP 135.925	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER (Rwys 9L/27R, 8/26 and 17/35) 118.5 327.05 135.1 327.05 (Rwy 9R/27L)		GND CON 121.9 348.6	CLNC DEL 118.85 348.6

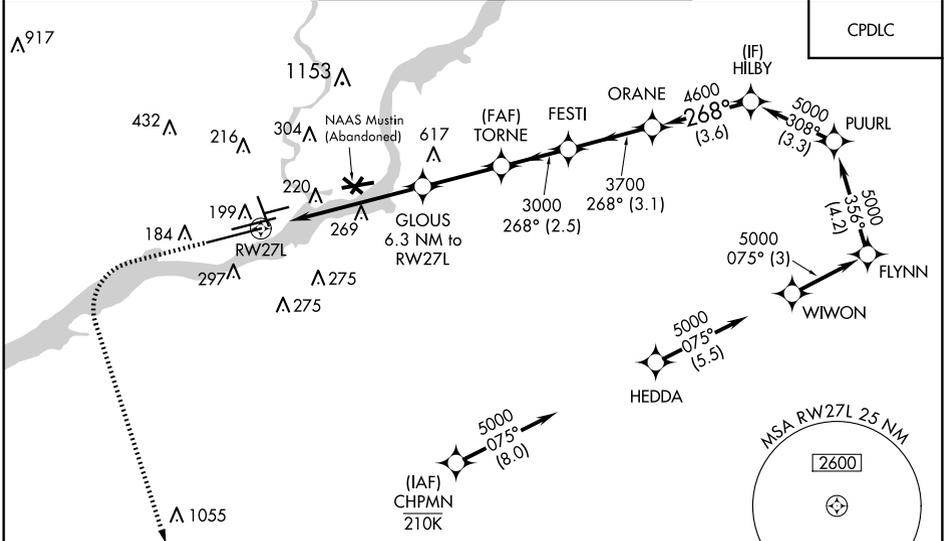

ELEV	36	TDZE	10	
CATEGORY	A	B	C	D
LPV DA*	210/24 200 (200-1/2)			
LNAV/DA VNAV	422/40 412 (400-3/4)			
LNAV MDA	540/24	530 (600-1/2)	540/55	530 (600-1)
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1 1/2 584 (600-1 1/2)	720-2 1/4 684 (700-2 1/4)

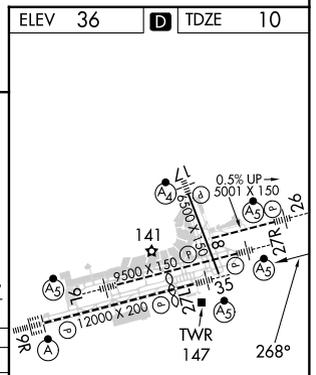

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

NE-4, 20 MAR 2025 to 17 APR 2025

NE-4, 20 MAR 2025 to 17 APR 2025