

STANDARD DEPARTURE CHART - INSTRUMENT

VAR 2.7° E

D-ATIS(DEP) 126.7
TWR 118.1(125.0)

ZWWW URUMQI/Diwopu
RNAV RWY07/25(VARMI/KEXAB)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.


APP01 120.25(119.9)
APP02 126.05(119.9)
APP03 123.8(119.9)
APP04 127.9(119.9)

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)




NOT TO SCALE

RNAV1
GNSS, RADAR REQUIRED

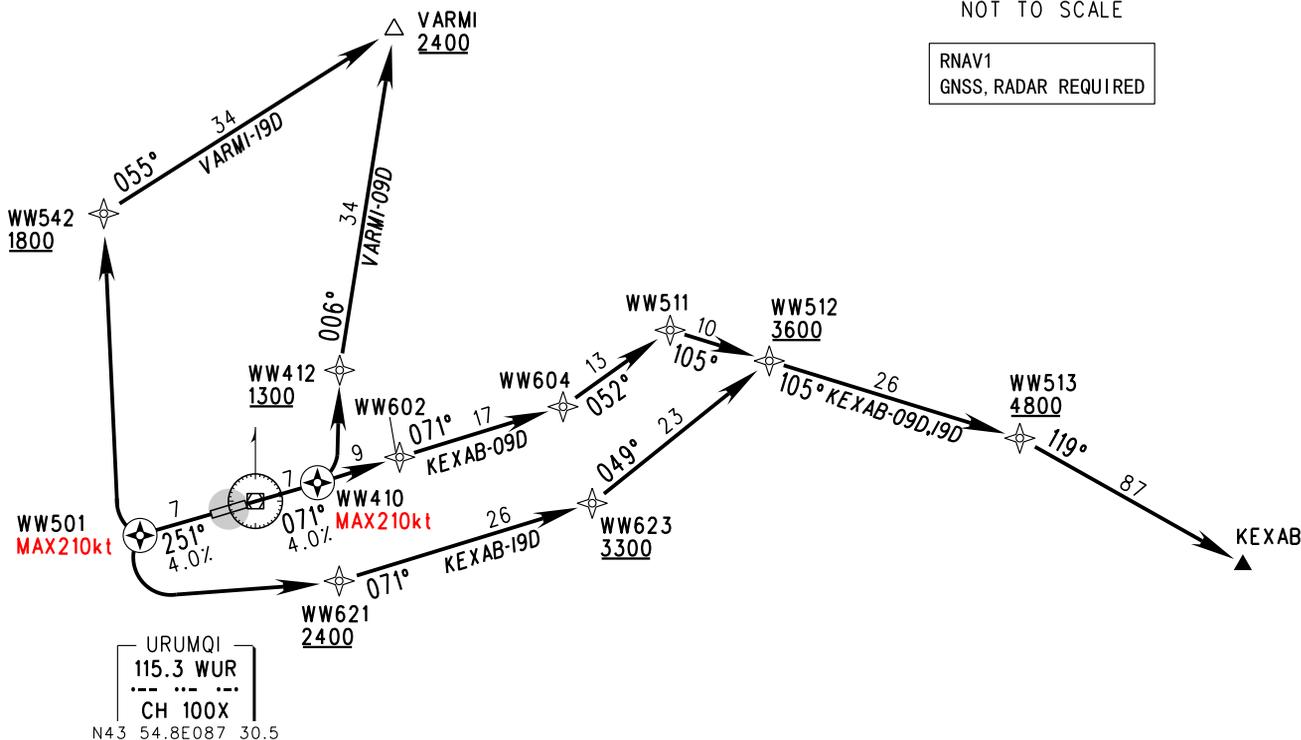

Notes:

1. KEXAB-09D: Climb straight ahead to WW410 with climb gradient 4.0% or above, then climb to enroute ALT with climb gradient 5.2% or above.
2. KEXAB-19D: Climb straight ahead to WW501 with climb gradient 4.0% or above, then climb to enroute ALT with climb gradient 5.2% or above.
3. Under radar control service, actual flight ALT instructed by ATC.



MSA 46km

Changes: Speed limit.