


Reykjavik RNP RWY 13 Instrument Approach Chart - ICAO

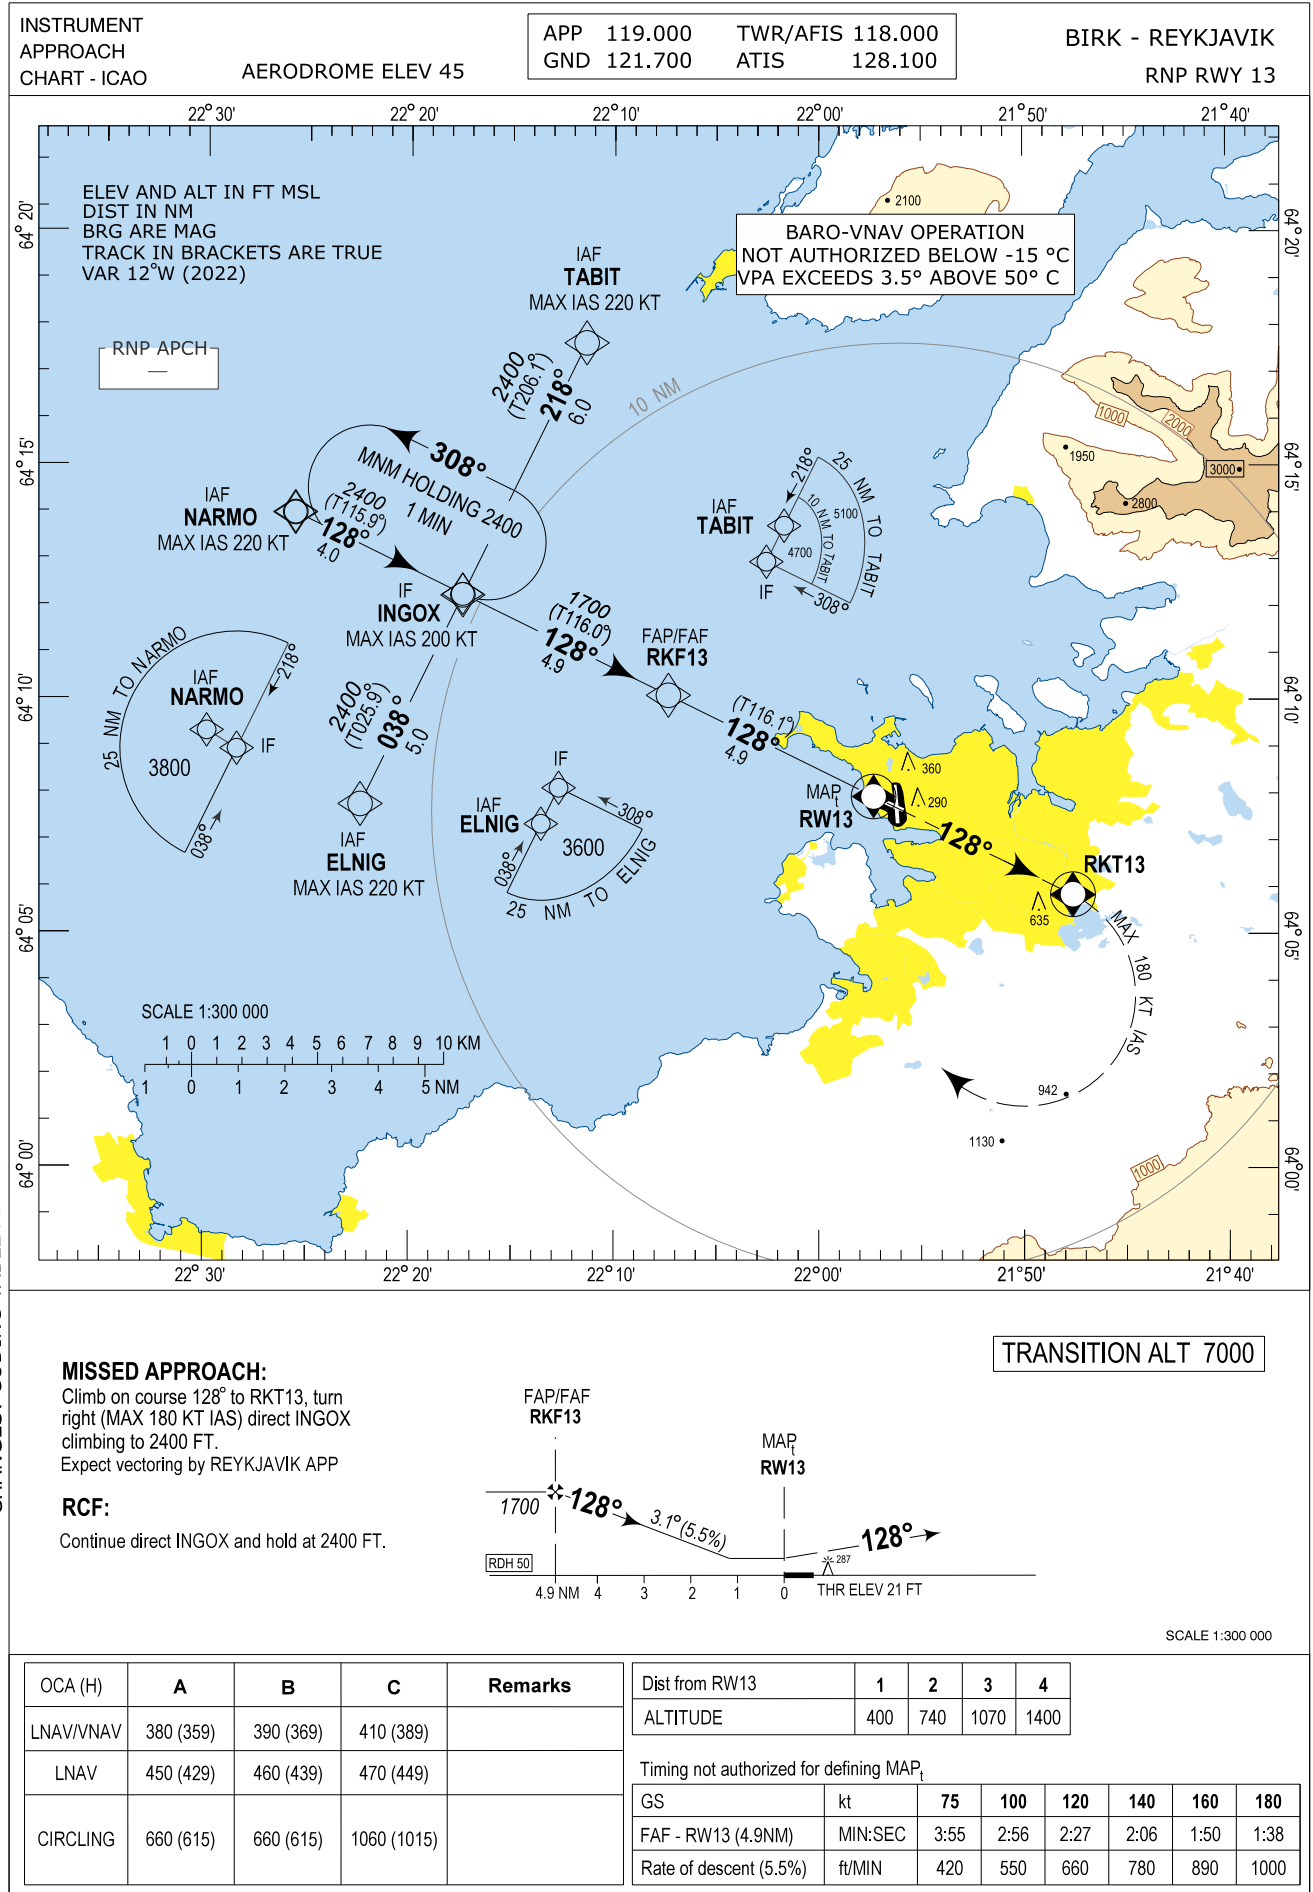

BIRK RNP RWY13

Recommended Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance	Turn Direction	Altitude (ft)	Speed (kt/h)	VPA/ TCH	Navigation Specification
010	IF	ELNIG	-		+12.0			A3600+	-220		RNP APCH
020	TF	INGOX	-	038 (025.9)	+12.0	5.0	R	A2400+	-200		RNP APCH
010	IF	NARMO	-		+12.0			A3800+	-220		RNP APCH
020	TF	INGOX	-	128 (115.9)	+12.0	4.0		A2400+	-200		RNP APCH
010	IF	TABIT	-		+12.0			A4700+	-220		RNP APCH
020	TF	INGOX	-	218 (206.1)	+12.0	6.0	L	A2400+	-200		RNP APCH
030	TF	RKF13	-	128 (116.0)	+12.0	4.9		A1700+		3.13°	RNP APCH
040	TF	RW13	Y	128 (116.1)	+12.0	4.9				3.13°/ 50	RNP APCH
050	CF	RKT13	Y	128 (116.3)	+12.0	4.8			-180		RNP APCH
060	DF	INGOX		-			R	A2400	-180		RNP APCH

Waypoint coordinates

Waypoint Identifier	Coordinates		Display	
	LAT	LON	LAT	LON
ELNIG	640746.42N	0222225.16W	N 6407.77	W 02222.42
NARMO	641359.88N	0222539.30W	N 6414.00	W 02225.66
TABIT	641737.73N	0221123.25W	N 6417.63	W 02211.39
INGOX	641215.30N	0221725.27W	N 6412.26	W 02217.42
RKF13	641006.55N	0220721.50W	N 6410.11	W 02207.36
RW13	640757.10N	0215719.29W	N 6407.95	W 02157.32
RKT13	640550.75N	0214736.08W	N 6405.85	W 02147.60