


ICAO - INSTRUMENT APPROACH CHART

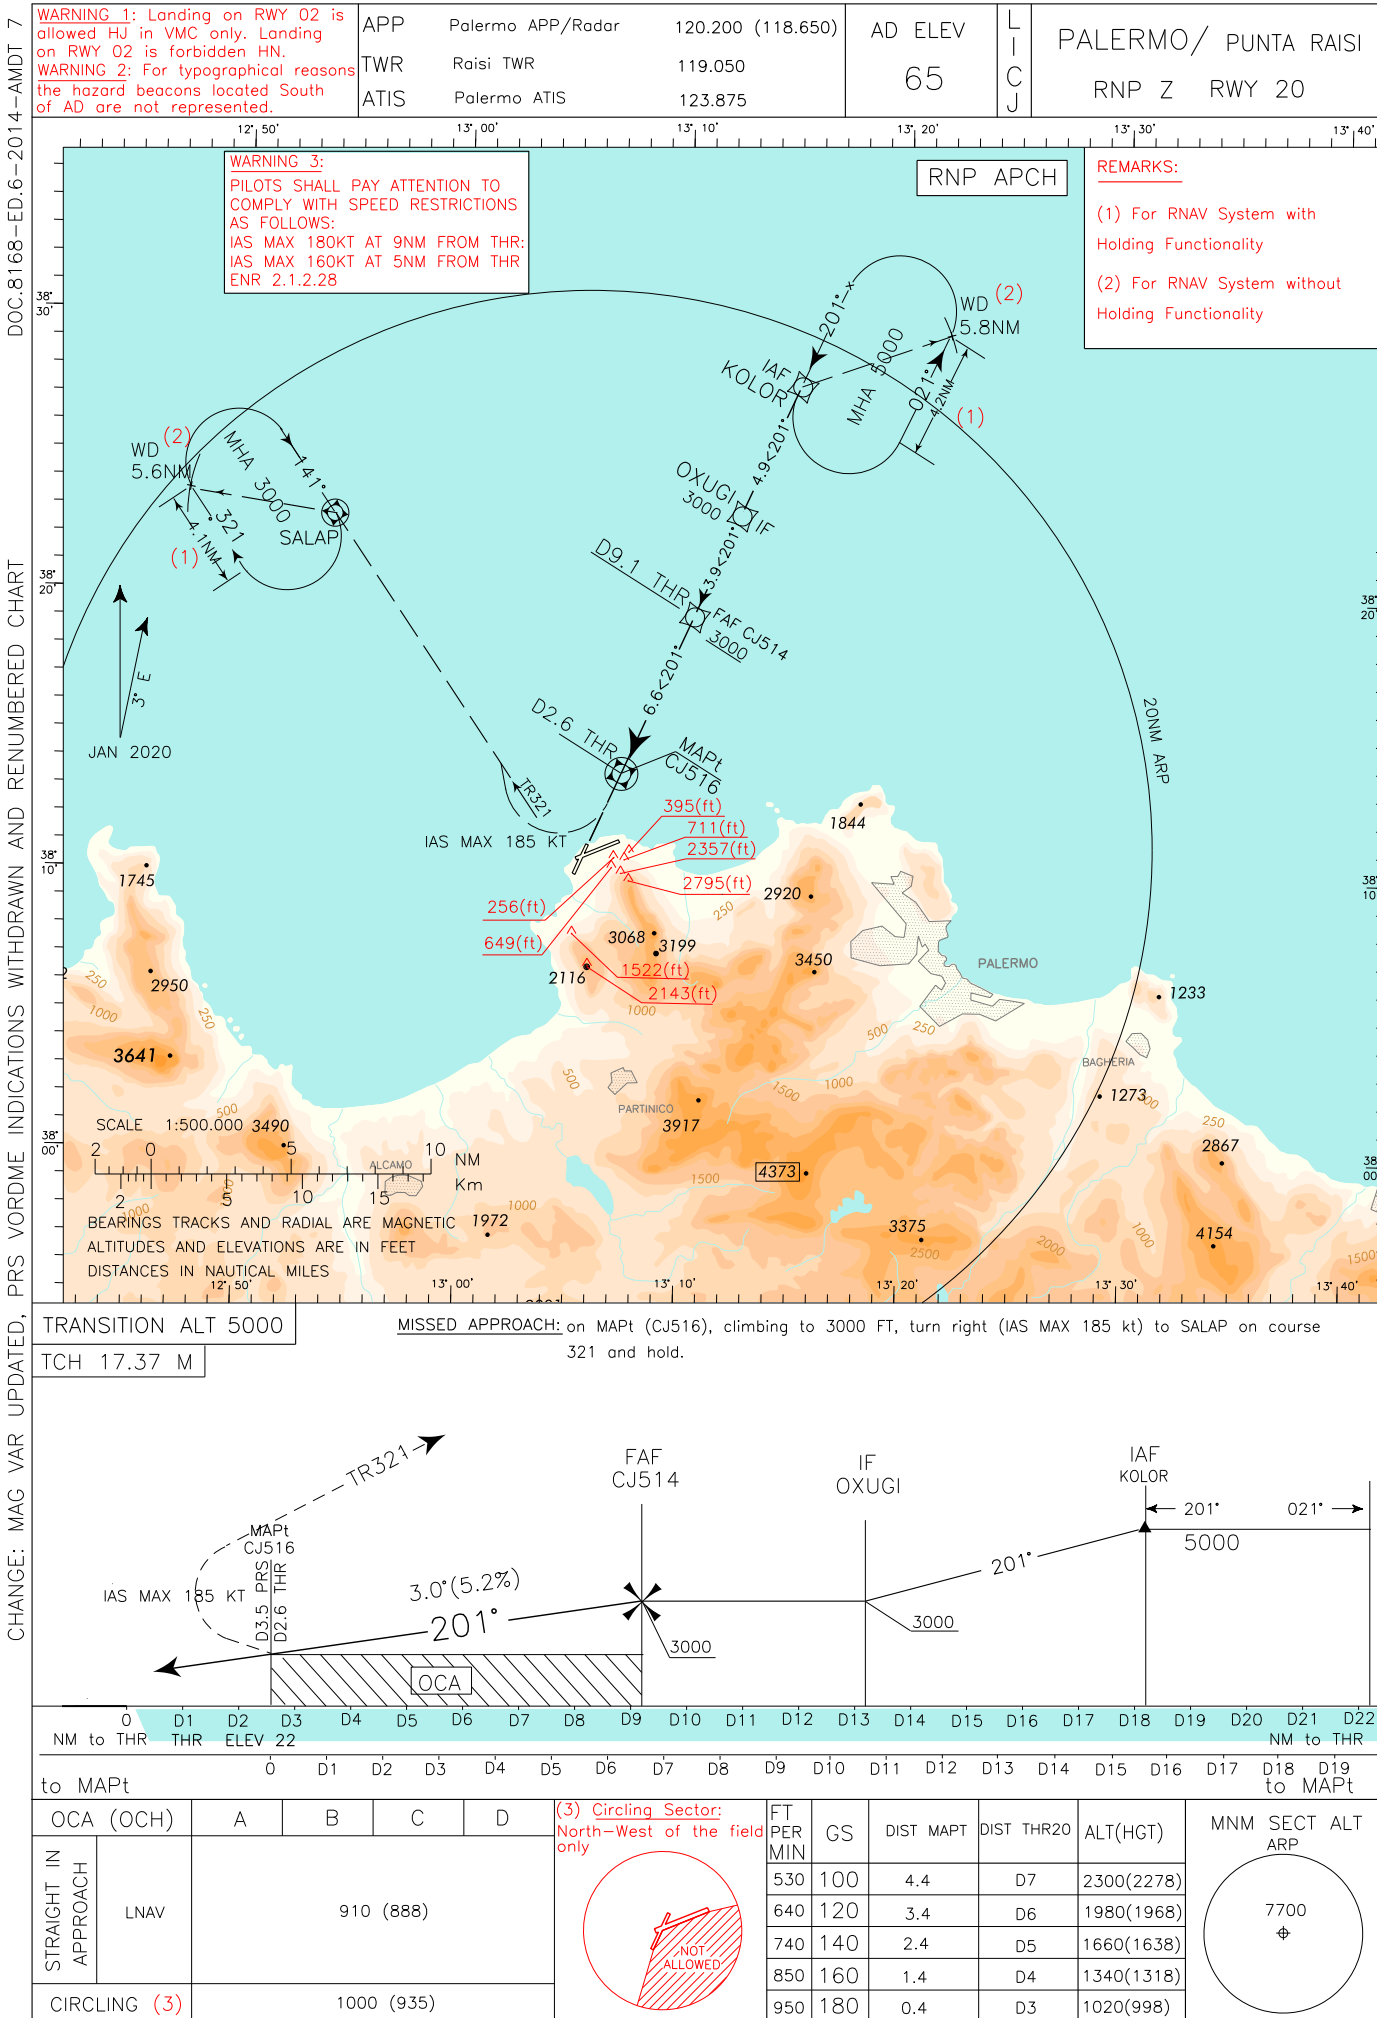

TABULAR DESCRIPTION

Palermo RNP Z RWY20 – Instrument Approach Procedure

Path Terminator	Waypoint Identifier	Inbound Course °M (°T)	Leg Distance (NM) (1)	Timing(min.)/ Waypoint Distance (NM) (2)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FL)	Speed Limit (kt)	Magnetic Variation (°)	Navigation Specification
HM	KOLOR	201°(204°)	4.2	- / 5.8	L	+5000	-	-	3°	RNAV 1

Serial Number	Path Terminator	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed Limit (kt)	VPA/ TCH	Navigation Specification
010	IF	KOLOR	-	-	-	-	-	+5000	-	-	RNAV 1
020	TF	OXUGI	-	201°(203.8°)	-	4.9	-	+3000	-	-	RNP APCH
030	TF	CJ514	-	201°(203.8°)	-	3.9	-	+3000	-	-	RNP APCH
040	TF	CJ516	Y	201°(203.8°)	-	6.6	-	@910	-	-	RNP APCH
-	-	THR20	-	-	-	-	-	+79	-	-3°/17.37M	-
060	CF	SALAP	-	321°(324.7°)	3°	-	R	+3000	185	-	RNP APCH
070	HM	SALAP	Y	141°(145°)	-	-	R	+3000	-	-	RNAV 1

Path Terminator	Waypoint Identifier	Inbound Course °M (°T)	Leg Distance (NM) (1)	Timing(min.)/ Waypoint Distance (NM) (2)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FL)	Speed Limit (kt)	Magnetic Variation (°)	Navigation Specification
HM	SALAP	141°(145°)	4.1	- / 5.6	R	+3000	-	-	3°	RNAV 1

(1) RNAV system with holding functionality
(2) RNAV system without holding functionality

WAYPOINT LIST
RNP Z RWY20

Waypoint Identifier	Coordinates
CJ514	38°19'24.01"N 013°10'26.32"E
CJ516	38°13'23.05"N 013°07'03.72"E