


ICAO - INSTRUMENT APPROACH CHART

DOC. 8168 ED.6 - 2014 - AMDT 7


CHANGE: TWR FREQ MODIFIED; REMARK 7 ADDED.

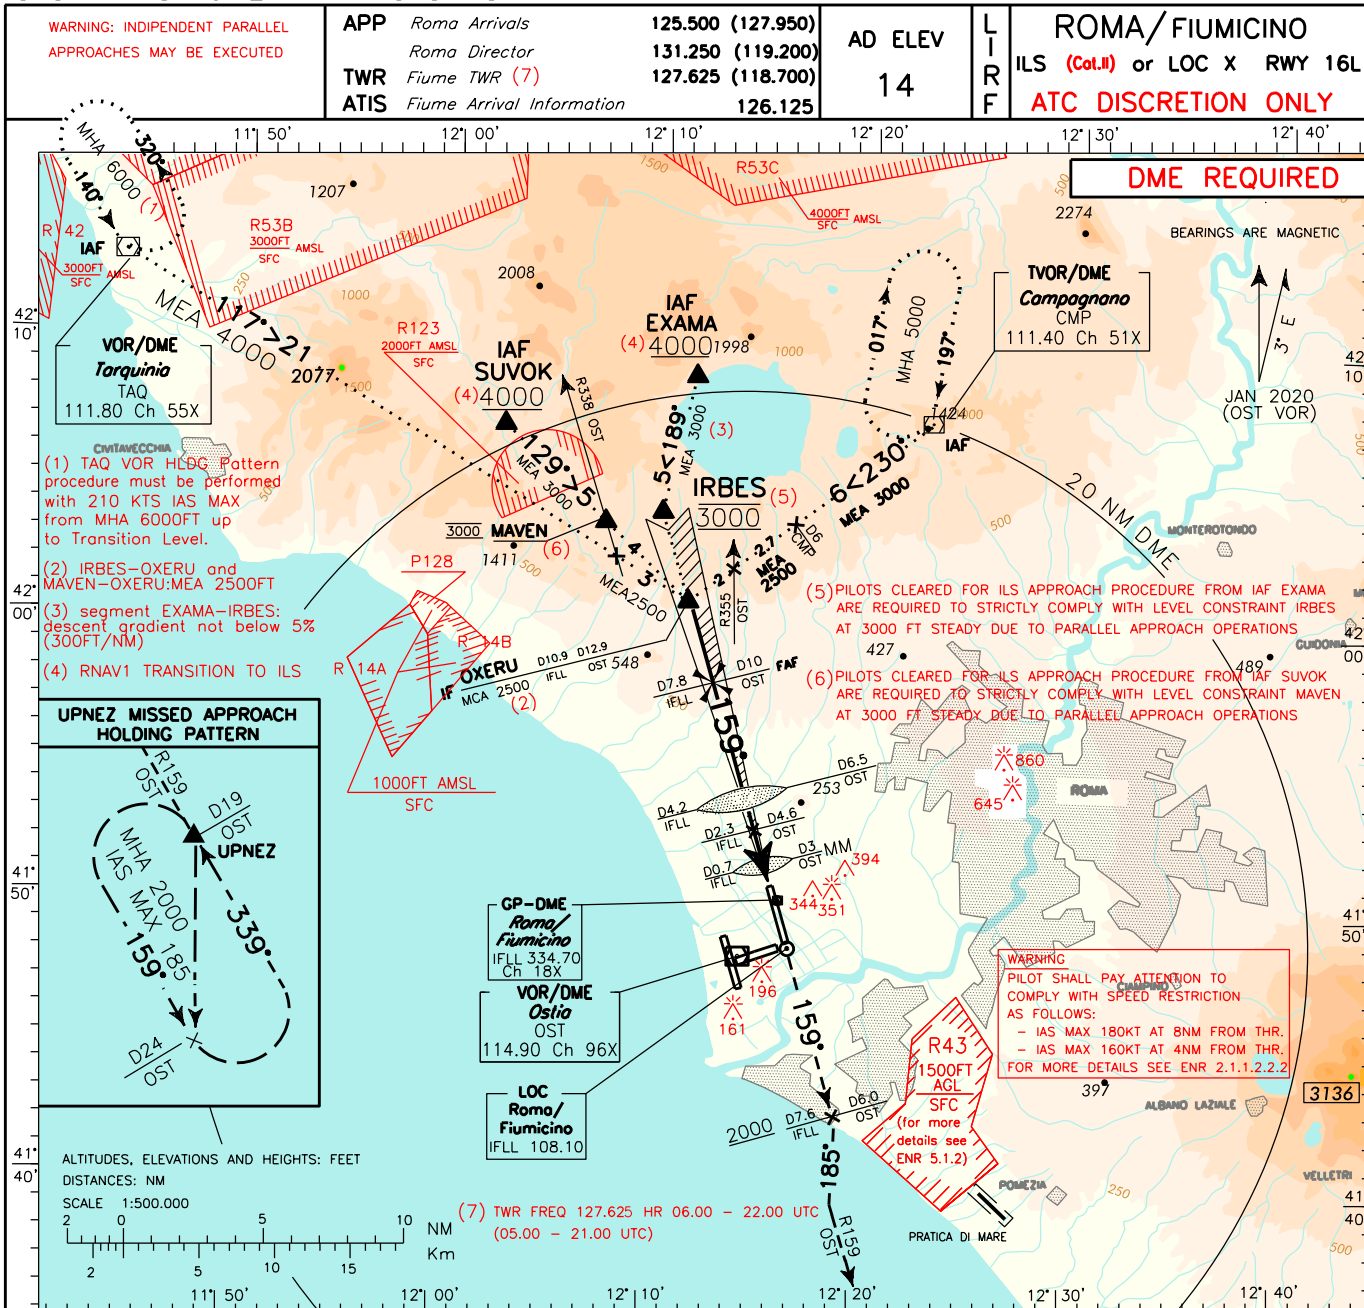

TRANSITION ALT 6000

MISSED APPROACH: Proceed on RWY heading 159°, climb to 2000 ft; at 6 NM OST DME to be reached at 2000 ft, turn right heading 185° to join RDL 159 OST VOR to UPNEZ holding point; hold between 19 and 24 NM OST DME with IAS MAX 185 kt.

REMARK: M.A. Gradient is 4,3% (260 ft/NM) until 2000 ft for ATC reasons.
If unable to comply advice ATC.

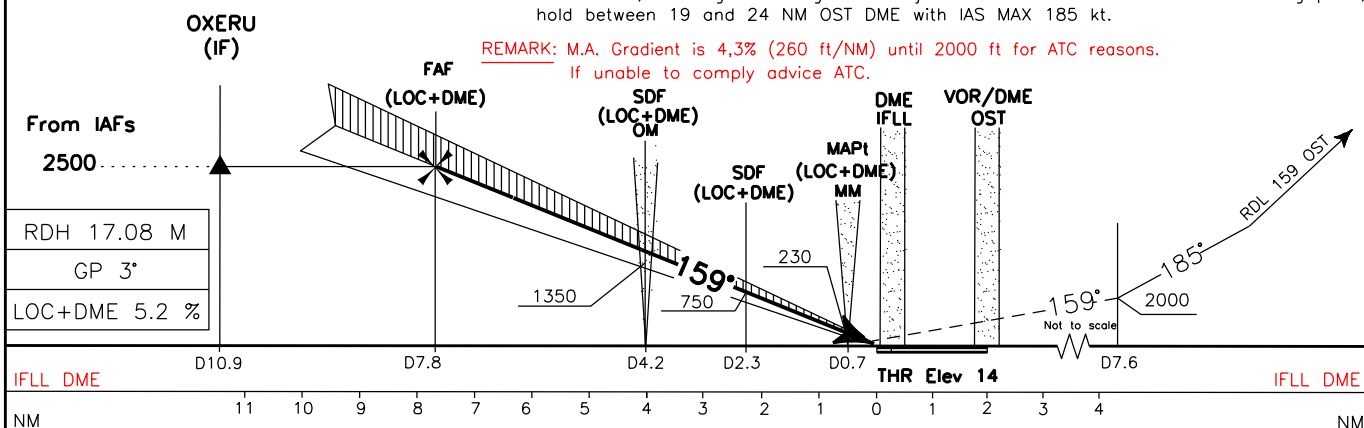

OCA(OC)		A	B	C	D	FT per MIN	GS	FAF—OM	OM—MM	MNM OST	SECT	ALT VOR
STRAIGHT IN APPROACH	ILS CAT I	214 (200)	214 (200)	214 (200)	214 (200)			3.6 NM	3.5 NM			
	ILS CAT II	84 (70)	94 (80)	99 (83)	114 (100)	2 : 42	2 : 38					
	LOC	420 (406)				2 : 10	2 : 06					
	CIRCLING	800 (786)		900 (886)		1 : 48	1 : 45					
						745 140	1 : 33	1 : 30				
						850 160	1 : 21	1 : 19				