ILS y or LOC y RWY 19

HALMSTAD TOWER	130.105
	135.055

THR ELEV 84.2 ft, AD ELEV 101 ft
OCH are related to THR.
Circling OCH are related to AD ELEV.
BRG are MAG
ALT. HGT and ELEV in ft.

INSTRUMENT APPROACH CHART – ICAO

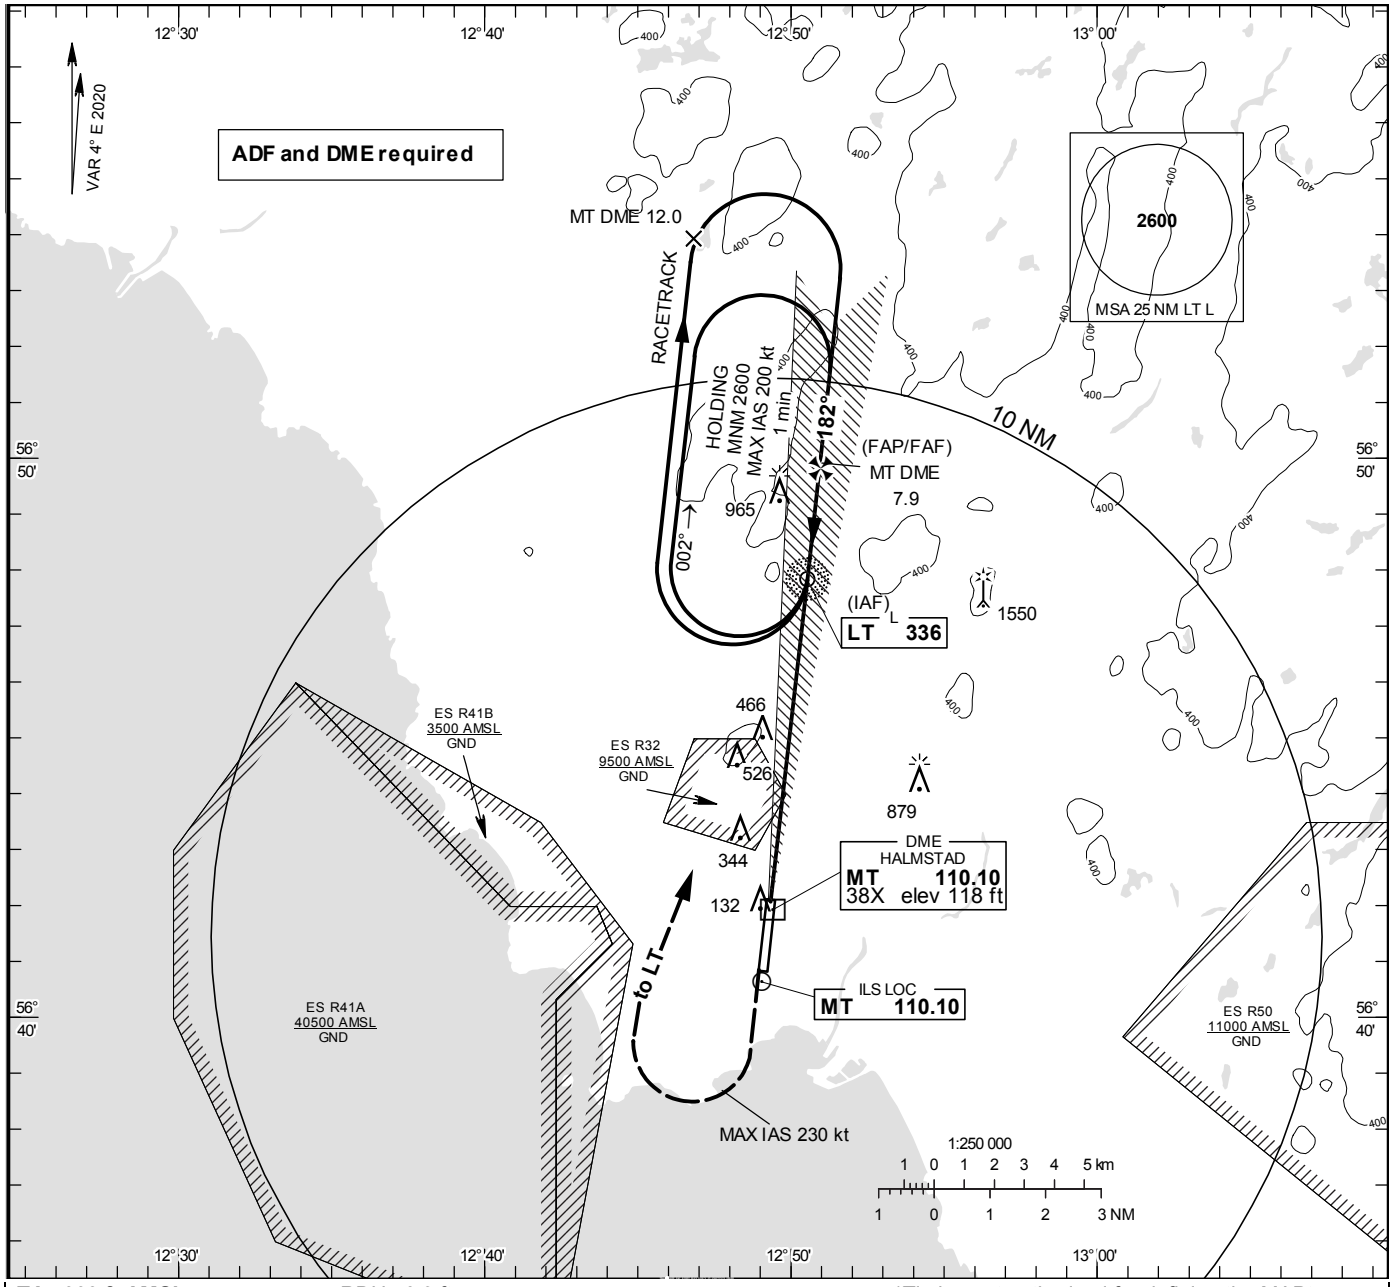

TA 5000 ft AMSL RDH 50.9 ft *Timing not authorized for defining the MAPt

OM replaced by MT DME 4.0
MM replaced by MT DME 0.8

CLIMB STRAIGHT AHEAD TO 1500.
TURN RIGHT (MAX IAS 230 kt)
TO LT CLIMBING TO 2600

LOC
FAF at MT DME 7.9 2600
SDF: MT DME 4.0 at 1370
MAPt at MT DME 0.8
Descent grad. 5.2% (3.0°)

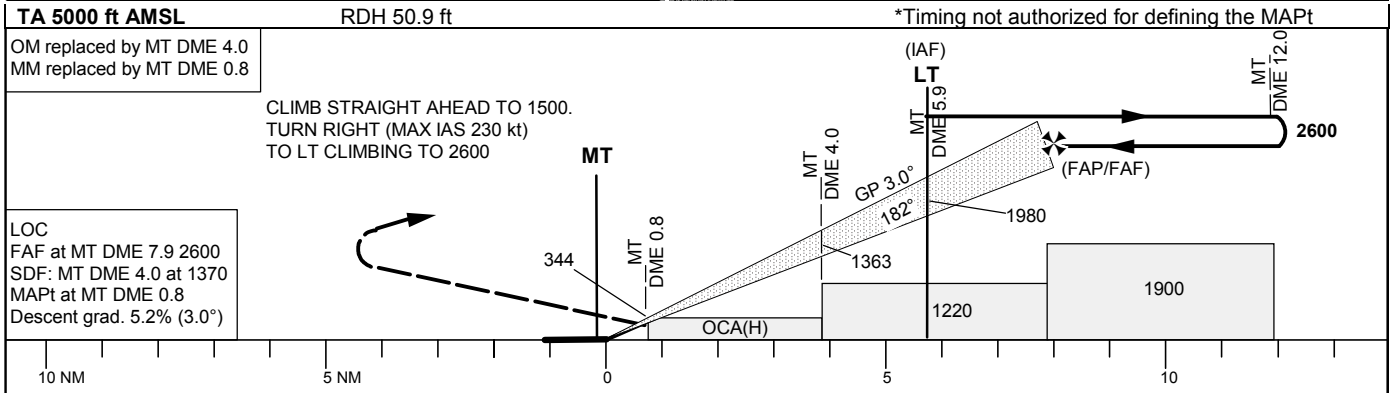

OCA (H)					
Cat of ACFT		A	B	C	D
Straight-in Approach	CAT I	232 (147)	243 (158)	255 (170)	269 (184)
	LOC	720 (640)			
Circling		640 (540)	830 (730)	1280 (1180)	1280 (1180)

Circling Cat D Max IAS 195 kt

Final approach	LOC distance FAF-MAPt 7.1 NM*						
DME MT NM	2	3	4	5	6	7
ALT	730	1040	1370	1680	2000	2320
GS	kt	80	100	120	140	160	180
Time	min:s	5:19	4:15	3:33	3:02	2:39	2:22
Rate of descent	ft/min	425	530	635	745	850	955