

**INSTRUMENT APPROACH
CHART (IAC)**

AD ELEV: 1352'

GOIANÁ / Presidente Itamar Franco (SBZM)



RNP RWY 26

(CAT A,B,C)

ATIS NIL	APP NIL	AFIS ZONA DA MATA 130.10	GNDC NIL
TEMP LNAV/VNAV MIN 0°C / MAX 50°C	FINAL CRS 256°	FAF: 2970'	LNAV MDA / (OCH): 2000' / (680')

APCH Perdida: Subir para **6000'**. Manter rumo **256** até **3000'**. Após, curvar à DIREITA direto ZM003 para espera.

Missed APCH: Climb to **6000'**. Maintain course **256** until **3000'**. After, turn RIGHT direct ZM003 for holding.

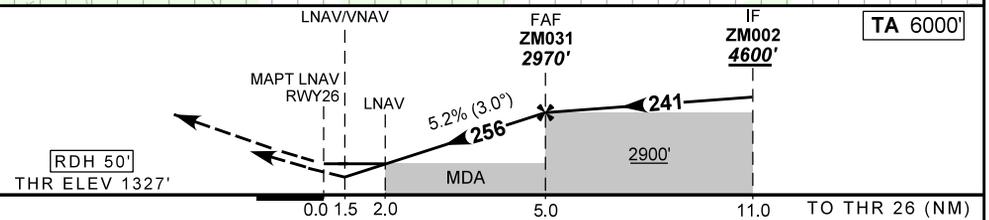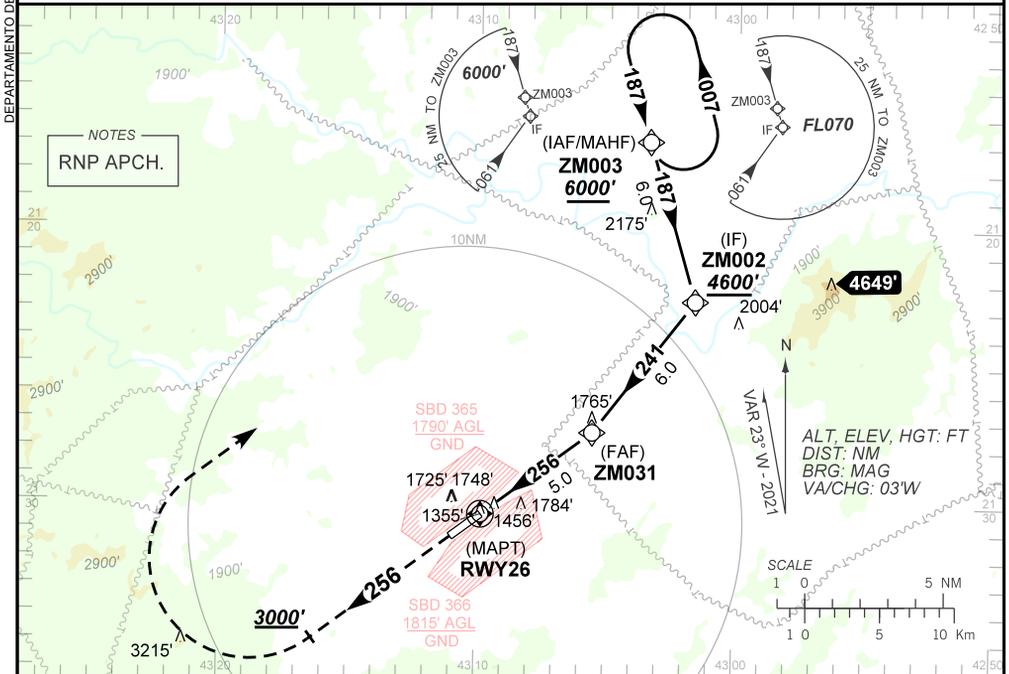

RWY26	1.5	2.0	3.0	4.0	ZM031		Ground Speed (KT)	090	110	130	150	170	190
ALT	1857	2000	2332	2651	2970		FPM	500	600	700	800	900	NA
(HGT)	530	680	1005	1324	1643		FAF-MAPT	NIL					

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	1857' / (530')				
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 2400 / NIL				
	MDA / (OCH)	2000' / (680')				
LNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 2400 / NIL	NIL / 3100 / NIL			
	MDA / (OCH)	NA				
CIRCLING	MDA / (OCH)	NA				
	VIS (m)	NA				

CHANGES: EAC, LAYOUT, OCH.

DEPARTAMENTO DE CONTROLE DO ESPAÇO AÉREO